CAT Reporting Customer & Account Technical Specifications for Industry Members

5/7/2021

Table of Contents

Pref	ace		. iv
Exe	cutive	Summary	v
1.	Intro	duction	1
	1.1.	CAT Overview	1
2.	CAT	Customer & Account Reporting Fundamentals	3
	2.1.	Key Data Elements	3
		2.1.1. Firm Identifiers in File Submissions	3
	2.2.	Reference Data	4
		2.2.1. Firm Designated ID (FDID)	4
		2.2.2. Large Trader ID (LTID) and Unidentified Large Trader ID (ULTID)	5
		2.2.3. FDID Open Date	5
		2.2.4. Customer	6
		2.2.5. Input Identifiers	6
		2.2.6. Transformed Identifier (TID)	7
		2.2.7. Customer ID	7
		2.2.8. CCID Subsystem	8
		2.2.9. CAIS Data Subsystem	8
		2.2.10. Reportable Identifier	10
		2.2.11. Data Inconsistency	10
		2.2.12. Material Inconsistencies Procedure	10
		2.2.13. Notification of Customer Record Updates	11
	2.3.	Data Types	13
		2.3.1. Data Validation Based on Data Types	13
		2.3.2. Required, Conditional, and Optional Fields	15
3.	Spe	cial Reporting Requirements	16
	3.1.	Replacement of FDIDs	16
	3.2.	Mass Transfer of FDIDs across CAT Reporter Firms	16
		3.2.1. Automated Transfer Procedure	16
		3.2.2. Transfers enacted in CAIS Data Reporting	17
	3.3.	Translation of Input Identifiers to TID Values	17
	3.4.	Translation of TID to CCID Values	18
	3.5.	Transition from LTID to Full Customer Reporting	18
	3.6.	Full Data Replacement Submission	19
	3.7.	Periodic Full Data Refresh	19
	3.8.	Reporting Multiple Versions of a CAT Customer	19
	3.9.	Tracking of Historical CAT Customer Names	20

	3.10	. Specia	al Rules Regarding FDID Characters	20
4.	CAIS	S Repor	ting	21
	4.1.	CAIS	Data File	21
	4.2.	Transf	ormed Identifiers File	42
5.	Sub	missior	n Process	47
	5.1.	File Su	ıbmissions and Data Formats	47
		5.1.1.	File Submission Names	47
		5.1.2.	Submission Formats	48
		5.1.3.	Reference Data File Submission	48
		5.1.4.	Identifiers Data File Submission	54
		5.1.5.	Paired CAIS Data and Transformed Identifiers File JSON Example	55
		5.1.6.	Schema	60
	5.2.	Conne	ctivity	61
	5.3.	CAT In	terface Methods	62
		5.3.1.	CAT File Transfer	63
		5.3.2.	CAT Reporter Portal - CAIS	64
	5.4.	CAT C	AIS Reporting Hours	65
		5.4.1.	Submission of CAT Account and Customer Data	65
		5.4.2.	Deadline of Repair for Errors Identified by CAT CAIS	65
		5.4.3.	Deadline of Repair of Data Inconsistencies or Confirmation of Data Accurac	у
		lo	lentified by CAT CAIS	66
	5.5.	Securi	ty	66
		5.5.1.	Encryption (In-transit)	66
		5.5.2.	Encryption (At-rest)	66
		5.5.3.	Authentication	67
6.	Feed	dback a	nd Corrections	68
	6.1.	File an	d Error Feedback	68
		6.1.1.	Feedback Generation	69
		6.1.2.	Feedback File Names and Format	70
		6.1.3.	JSON Examples of Feedback File for file acknowledgement	76
	6.2.	File Int	tegrity	77
		6.2.1.	JSON Examples for File Integrity Feedback	78
	6.3.	Data Ir	ngestion	79
		6.3.1.	JSON Examples for Data Ingestion Feedback	80
	6.4.	Submi	ssion Inconsistencies	82
		6.4.1.	JSON Examples for Submission Inconsistencies Feedback	83
	6.5.	Correc	ctions	84

	6.5.	1. File Integrity Errors	84
	6.5.	2. Data Validation Errors	84
7.	Nightly D	Oata Inconsistencies Feedback	86
	7.1.	Data Inconsistencies Feedback File Names	86
	7.1.	2. JSON Examples for Data Inconsistencies Feedback	88
8.	Testing		90
9.	Addition	al Information	91
	9.1. Pub	olic Website	91
Арр	endices		92
Арр	endix A:	Change Release Management Process	93
Арр	endix B:	Error Codes	94
	B.1 File	Integrity Errors	94
	B.2 Data	a Validation Errors	96
	B.3 Data	a Layer Validation Error Codes	101
	B.4 War	rning Error Codes	102
	B.4 Inco	onsistency Codes	104
Арр	endix C: C	Glossary	105
Арр	endix D: [Data Dictionary	106
App	endix E: C	Country and Region Codes	132

Preface

Rule 613 of the Securities Exchange Act of 1934 requires national securities exchanges and national securities associations ("SROs") to submit a national market system plan to the Securities and Exchange Commission ("Commission" or "SEC") to create, implement, and maintain a consolidated audit trail (the "CAT") that would allow regulators to more efficiently and accurately track all activity in U.S. equity and listed options markets. Pursuant to Rule 613, the SROs filed with the Commission the National Market System Plan Governing the Consolidated Audit Trail ("CAT NMS Plan"), which was approved by the Commission on November 15, 2016.

Under Rule 613(g)(2), each member of a national securities exchange or national securities association is required to comply with all the provisions of the CAT NMS Plan. Relatedly, as mandated under Rule 613, the CAT NMS Plan requires each SRO to adopt rules requiring its members to comply with Rule 613 and the CAT NMS Plan, and to agree to enforce compliance by its members in that regard. Accordingly, each SRO has adopted rules requiring its members to comply with Rule 613 and the CAT NMS Plan. See, e.g., FINRA Rule 6800 Series.

The SROs jointly own Consolidated Audit Trail, LLC, which was formed by the SROs to arrange for and oversee the creation, implementation, and maintenance of the CAT as required under Rule 613. Thus, the CAT is a facility of each SRO.

This Customer and Account Technical Specification represents the second of the two phase approach to Industry Member reporting of Customer and Account data, including the full Customer and Account information required under the CAT NMS Plan.

Table 1: Industry Customer & Account Specifications Phased Approach

LTID Phase Production – 12/2020 Compliance Dates: 4/2021 Equity Large Firms 12/2021 2d Options and Small Firms	Full Customer and Account Reporting Go live July 2022
FDID, FDID Account Opening Date, LTID and LTID Effective Date	Remainder of account information and all customer information

Executive Summary

This final document describes the requirements for the reporting of customer and account data to CAT by Industry Members, including detailed information about data elements and file submission. It also describes how Industry Members submit files to CAT, including access instructions, network and transport options, and testing requirements. The final version of the CAT Customer & Account Reporting Technical Specification includes information regarding full Customer data submission.

A separate companion document containing detailed reporting scenarios entitled <u>CAT Customer & Account Industry Member Reporting Scenarios</u> should be used as a guide for determining how the field values laid out in this document must be applied when reporting various scenarios for customer and account data.

Table 2: Revision / Change Process

Version	Date	Author	Description
DRAFT 1.0	12/13/2019	Consolidated Audit Trail, LLC	Initial draft
1.0	1/31/2020	Consolidated Audit Trail, LLC	Publication of initial version
1.1	4/17/2020	Consolidated Audit Trail, LLC	Addition of Boolean data type Addition of fdidEndDateNULL, fdidEndReasonNULL, replacedByFDIDNULL, ItidEndDateNULL, and ItidEndReasonNULL attributes Removal of NULL acceptable values from fdidEndDate, fdidEndReason, replacedByFDIDNULL, ItidEndDate, and ItidEndReason attributes Addition of failedCorrectionItems array in Feedback file Modified guidance on nullifying previously populated attributes Modified submission and feedback examples to include additions/removals of attributes Modified schema field descriptions Replacement of CAT CAIS Reporter Portal with CAT Reporter Portal – CAIS Addition and modification of Error Codes Separation of Data Validation Warnings from Data Validation Errors Addition of optional Group attribute for submission file names Replaced usage of Status with Feedback for feedback file
1.1.1	6/4/2020	Consolidated Audit Trail, LLC	Inclusion of 'Entity ID' as example in FDID Definition Inclusion of 'ENTITY' as a valid FDID Type Correction of CAT CAIS Validation Warnings table Error Code numbering Clarification of 'Trading Day' as 'CAT Trading Day' and definition of 'CAT Trading Day'

Version	Date	Author	Description
			Explicit listing of 'false' as an acceptable value for Boolean attributes
			Inclusion of Error Code 22006 for duplicated largeTraderID within a single FDID record submission
1.1.2	12/02/2020	Consolidated Audit Trail, LLC	Update to the Unsigned data type to be the same range as a 63-bit unsigned integer rather than a 64-bit unsigned integer
			Updated firmDesignatedID data type from Alphanumeric to Text to bring in line with Transaction reporting. Also results in changes to data type for replacedByFDID and correctingFirmDesignatedID.
			Modification of the Feedback File to include submitterUserName and remove integrityErrorCode
			Renamed rejectionID within the failedCorrectionItems array to failedRejectionID, to clarify purpose
DRAFT 2.0	6/30/2020	Consolidated Audit Trail, LLC	Addition of Customer data, definitions, and reporting requirements
			Addition of separate Transformed Identifiers file Modified Feedback file to include Customer Data and Inconsistencies
			Expanded guidance for Reference Data File Submission Addition and modification of Error Codes
			Addition and modification of Data Layer Validation Error Codes
			Addition of Data Inconsistency Codes
DRAFT 2.0 r1	12/01/2020	Consolidated Audit Trail, LLC	Modifications to Schema Modification of Tax Identifier to Input Identifier terminology Addition of FOREIGN Input Identifier type Modification of Update Confirmation to Update Notification Modifications to File Submission rules Inclusion of Mass Transfer of FDIDs across CAT Reporter Firms Inclusion of Full Data Replace Submission Addition of Country and Region Code reference lists
DRAFT 2.0 r2	1/19/2021	Consolidated Audit Trail, LLC	Updates to the Account Type and Customer Type attribute codes and definitions
			Changed approach from Delta Files with Delta Records, to Delta Files with Full Records
			Split role value of HOLDER to two versions – TRDHOLDER and NTHOLDER, to reflect holders with trading and holders without trading authorization
			Removed NULL paired fields as a result of the change to Delta Files with Full Records
			Updated examples based on schema changes
			Updated to detail actions to take if a Foreign TID Type/Foreign TID Country Code/TID Value is incorrectly reported as a Natural Person or Legal Entity, and needs to be reported as the other
			Added customerRejectionEventID to feedback file to provide a single consistent ID for customer rejections
			Revised guidance for clearing LTID rejections
			Removed correctingLargeTraderID attribute from the Correction Actions list

Version	Date	Author	Description
2.0	1/29/2021	Consolidated	Modification to ULTID format validation
		Audit Trail, LLC	Modifications to accountType
			Removed accountSubType
			Split role value of AUTHTRADER to two versions – AUTHREP and AUTH3RD - to denote Authorized Traders who are, or are not, employees of the reporting firm
			Addition of hasDiscretion within fdidCustomerList
			Modifications of Appendices B and D
			Denoted certain conditionally approved sections in italics, and included note regarding conditional approval
2.0 r1	3/9/2021	Consolidated Audit Trail, LLC	Removed note regarding conditional approval, and converted all previously italicized conditionally approved sections to plain text, following approval
			Corrected priorCATReporterFDID data type to Text, following change of FDID from Alphanumeric to Text
			Corrected JSON Object level for the addressList on the Natural Person and Legal Entity Customer Record entries
			Minor textual edits
2.0 r2	5/7/2021	Consolidated Audit Trail, LLC	Added correspondentCRD attribute to the Main JSON Object level, to enable firms to delineate customer and account data of their correspondent introducing brokers.
			Changed reporting requirements to allow firms to report multiple versions of a single customer within a single submission file, and added a Special Reporting Requirements section regarding Reporting Multiple Versions of a CAT Customer.
			Removed Material and Minor Inconsistency checks against First Name and Last Name of a Natural Person CAT Customer.
			Changed data type of primeBrokerID, bankDepositoryID, and clearingBrokerID to be Arrays rather than Alphanumeric, to allow firms to report more than one value for a single FDID record.
			Modifications to remove LTID date validation comparisons against FDID dates – retirement of Error Codes 22025, 22026, 22027, 23002, and 23003 (included originally in LTID Technical Specification revision).
			Moved customerType attribute from the FDID record to the Customer record
			Removed customerType value of OTHER and replaced with NOTAPPLICABLE
			Added detailed information regarding FDID character rules that have been added following the transition from alphanumeric to text.
			Clarified file creation and versioning approach for Feedback files.
			Modified Feedback file schemas.
			Updated data and feedback examples.
			Modifications to Appendix B Error Codes.

Version 2.0 r2 vii

1. Introduction

1.1. CAT Overview

The Securities and Exchange Commission (SEC) approved Rule 613 under the Securities Exchange Act of 1934, which requires national securities exchanges and national securities associations (collectively, the Participants) to submit a national market system plan to create, implement, and maintain a consolidated audit trail (CAT NMS Plan) that would capture customer and order event information for orders in NMS Securities and OTC Equity Securities (Eligible Securities), across all markets, from the time of order inception through routing, cancellation, modification, execution, and allocation. The SEC approved the CAT NMS Plan on November 15, 2016.

In accordance with SEC Rule 613, the CAT NMS Plan requires a Central Repository that will comprehensively track orders throughout their lifecycle and identify the Participants and Industry Members handling them, as well as the account holders and authorized traders for any account that originates an order (Customers¹). Specific data elements will be submitted to the Central Repository by Participants, Industry Members, and CAT Reporting Agents. CAT Reporting Agents may be third-party firms reporting on behalf of other entities, or may be outside parties that are not required to submit data to the CAT, but from which CAT may receive data per the CAT NMS Plan, such as the Securities Information Processors (SIPs).

The CAT NMS Plan also requires the selection of an entity as the Plan Processor to be responsible for performing the processing functions required by Rule 613 and the Plan. The Operating Committee of Consolidated Audit Trail, LLC, a governing body composed of representatives of the Participants, oversees the operation of the CAT. The duties of the Operating Committee are further described in Article IV of the CAT NMS Plan.

The CAT Customer & Account Information System (CAIS²) is the separate system for submission of customer and account data. As part of the transition from Phase 1 reporting of only account and LTID data, it will now be required for CAT Reporter Firms to submit full customer and account data.

Version 2.0 r2

_

¹ Customers are defined in SEC Rule 613(j)(3) as: (i) the account holder(s) of the account at a registered broker-dealer originating the order; and (ii) any person from whom the broker-dealer is authorized to accept trading instructions for such account, if different from the account holder(s).

² References to CAIS throughout this document are asserted to include both CAIS and the separate CCID Subsystem, unless otherwise explicitly noted.

Refer to SEC Rule 613, available at: https://www.sec.gov/rules/final/2012/34-67457.pdf for more details. Refer also to CAT NMS Plan, available at: https://www.catnmsplan.com/home/about-cat/cat-nms-plan/index.html.

2. CAT Customer & Account Reporting Fundamentals

2.1. Key Data Elements

The sections below describe the key data elements of CAT used in CAT CAIS submission files. A CAT CAIS submission is comprised of two files – a CAIS Data file and a Transformed Identifiers file – in order to facilitate separation of the customer and account data from the Transformed Identifier used to uniquely reference a single customer.

2.1.1. Firm Identifiers in File Submissions

The CAT submissions process relies on certain firm identifiers to determine whose data is being reported, and to determine and verify the authorization of the submitter of the data.

CAT Reporter CRD

The CAT Reporter CRD is the Industry Member's Central Registration Depository (CRD) number, used to ensure all account and customer reporting activity of a single Industry Member CAT reporter can be consolidated at the firm level in CAT CAIS.

CAT Submitter ID

The CAT Submitter ID is a CAT assigned identifier for a firm that submits data to CAT. The Submitter ID uniquely identifies the Submitter and may be a different identifier than the CAT Reporter CRD. CAT Reporters may submit data for themselves or may authorize a separate Submitter to report on the CAT Reporter's behalf.

Authorization between CAT Reporters and Submitter is granted through a reporting relationship that will be entered by the CAT Reporter using the CAT Reporter Portal. When a file is received, CAT CAIS will verify that the CAT Reporter has authorized the Submitter to submit on its behalf.

Correspondent CRD

The Correspondent CRD is the CRD of the Introducing Broker or Correspondent Firm whose customer and account data is kept on record at the CAT Reporter firm reporting to CAT. The Correspondent CRD must be a different identifier than the CAT Reporter CRD. For a CAT Reporter that is reporting their own data, the Correspondent CRD attribute is not to be populated. CAT CAIS will not validate that a business relationship exists between the CAT Reporter and the Correspondent firm.

2.2. Reference Data

2.2.1. Firm Designated ID (FDID)

Section 6.4 of the CAT NMS Plan requires that for the original receipt or origination of an order, Industry Members must report the Firm Designated ID (FDID). FDID is defined in Section 1.1 of the CAT NMS Plan as a unique identifier for each trading account. Before the reporting of Customer Account Information and Customer Identifying Information begins in July 2022, regulatory users of the CAT will use FDIDs to identify whether the same account is trading within a single broker-dealer. After the reporting of Customer Account Information and Customer Identifying Information begins, FDIDs will be used to link accounts to specific customers, including mapping accounts with common ownership (for instance, where a customer is associated with more than one FDID). Therefore, FDID is required to be populated on all Transaction Order events requiring an FDID for both equities and options.

Industry Members must assign a single FDID to each trading account that is unique, persistent and consistent within the firm and across all vendors and systems the Industry Member may use to report Transaction Order events requiring an FDID to CAT and associated Customer and Account Information for the FDID to CAT CAIS, and unique across time (with limited exceptions, such as closed accounts, system migration, and change of vendors). For example, if an Industry Member uses multiple vendors for reporting Transaction data to CAT, the Industry Member must ensure that all vendors use the same FDID for a particular trading account in all CAT Transaction Order events requiring an FDID, and that the same FDID associated with the trading account is submitted to the Customer and Account Information System.

Examples of what an FDID would represent include:

- Individual Customer Account Number
- Institutional Customer Account Number
- Account Number of Average Price Account Designated for a Specific Customer (e.g., Master Account or agency Representative Order scenarios)
- Account Number of Firm Average Price Account Shared Across Customers (e.g., Master Account, Account Used For Agency Representative Order Flows)
- Entity ID of the firm when an employee of the firm is exercising discretion over multiple customer accounts
- Proprietary Trading Account Number
- Firm assigned identifier representing a trading relationship (Relationship ID) can be used when the trading account structure is unavailable at the time the order was placed

• Firm assigned identifier (Entity ID) representing the firm's discretionary relationship with the client when an employee of the Industry Member is exercising discretion over multiple client accounts and creates an aggregated order for which a trading account number of the Industry Member is unavailable at the time of order origination;

An actual account number may not be used as the FDID for a customer account for CAT reporting. See <u>CAT FAQ M2</u> for more information on the prohibition on use of actual account numbers. Refer to the <u>CAT Industry Presentation</u> on FDID for additional information.

2.2.2. Large Trader ID (LTID) and Unidentified Large Trader ID (ULTID)

LTID is an identifier assigned by the SEC to a "large trader," defined as a person whose transactions in NMS securities equal or exceed:

- 2 Million shares or \$20 Million in any single calendar day; OR
- 20 Million shares or \$200 Million in any calendar month

A person qualifying as a large trader is required to submit Form 13H to the Commission, and be assigned an LTID. In accordance with the CAT NMS plan as amended for LTID, CAT Reporter firms are required to report all LTIDs associated to their FDIDs as part of their customer and account reporting. Thus, CAT Reporter firms are required to obtain the LTID for each account (to the extent that an LTID exists).

In the scenario a CAT Reporter that is a clearing firm determines a person (which includes both natural persons and legal entities under Section 13(h)(8)(e) of the Exchange Act) would qualify as a large trader, but the firm has not yet been provided with an LTID by the person, the clearing firm is required to assign an ULTID to the person until such time as the person provides their LTID. Any CAT Reporter that is a clearing firm with an obligation to assign an ULTID under the large trader rule is required to report any assigned ULTIDs associated to their reported customers as part of their customer and account reporting. CAT Reporters that are not self-clearing and do not have an obligation to assign ULTIDs are not required to report ULTIDs to CAT as they will have no such number to report.

Please refer to Section 4 – CAIS Reporting – for information regarding the format requirements of the LTID and ULTID. For purposes of the CAT CAIS Reporting Technical Specification, references to LTID attributes and scenarios throughout the document are intended to cover both LTID and ULTID usage in accordance with the reporting obligations noted above.

2.2.3. FDID Open Date

The FDID open date is included in the CAIS data schema as *fdidDate*. The fdidDate field must be populated with either:

- Date in which the account was opened, or
- The Account Effective Date, as defined in Section 1.1 of the Plan, in the following circumstances:
 - The Industry Member has established a trading relationship, but not an account, with an institution or client
 - o Proprietary trading accounts of the Industry Member
 - Accounts opened prior to the implementation date of the CAT NMS Plan applicable to the relevant CAT Reporter
 - The Industry Member has acquired another Industry Member and the Account Open Date was changed to a date value on or after the completion of the merger

2.2.4. Customer

The CAT NMS Plan defines the term "Customer" as having the same meaning provided in SEC Rule 613(j)(3), which is as follows:

- (i) The account holder(s) of the account at a registered broker-dealer originating the order;
- and (ii) any person from whom the broker-dealer is authorized to accept trading instructions for such account, if different from the account holder(s).

2.2.5. Input Identifiers

Input Identifiers is a generic term for the types of identifiers used to identify unique customer records. These identifiers include:

- Social Security Number (SSN)
- Individual Taxpayer Identification Number (ITIN)
- Employer Identification Number (EIN)
- Foreign Identifiers (FOREIGN)

Input Identifiers are always translated to Transformed Identifier (TID) values in accordance with the guidance in Section 3.3, Translation of Input Identifiers to TID Values, prior to submission to CAT within the Transformed Identifiers file.

Social Security Number and Individual Taxpayer Identification Number are considered Sensitive Identifiers and **must not** be submitted in the CAIS Data file. However, the Employer Identification Number (EIN) is not a Sensitive Identifier and therefore must be submitted in the CAIS Data file as a plain text data element for a Legal Entity Customer when the EIN was used to generate the TID of the customer.

The Foreign Identifier type is permissible to use for foreign Natural Person or Legal Entity customers for which an SSN/ITIN or EIN is not available. The value of the Foreign Identifier, unless the identifier is a

Legal Entity Identifier (LEI), is considered a Sensitive Identifier and **must not** be submitted in the CAIS Data File. Examples of identifiers reported as the Foreign Identifier type include:

- Legal Entity Identifier (LEI)
- EU Member State National Client Identifier (NCI) in accordance with MIFID II
- Country of Domicile and Passport Number
- National Identity Card
- Permanent Resident Card Number

In the event that a CAT Reporter Firm has more than one identifier collected for a CAT Customer – but does not have an EIN, SSN, nor ITIN for the customer – the CAT Reporter Firm should use a single, consistent identifier to generate the TID of the customer. The Plan Processor recommends the following order of preference for what identifier type should be used for generating the TID:

- 1. National Registration or Tax Identifier
- 2. LEI
- 3. Country of Domicile and Passport Number
- 4. Permanent Resident Identifier

When a Foreign Identifier is used to generate a TID and included in the CAIS Identifiers file submission, it is also required for the CAT Reporter Firm to state what type of identifier was used to generate the TID.

2.2.6. Transformed Identifier (TID)

The Transformed Identifier (TID) is a hashed version of the Input Identifier, submitted by the CAT Reporter to CAT in place of the Input Identifier, in accordance with the exemptive relief granted by the SEC on March 17, 2020. The CAT Reporter has the responsibility to translate Input Identifiers to TID values prior to submission, in accordance with the mathematical logic provided in Section 3.3 – Translation of Input Identifiers to TID Values. Input Identifiers used to generate TID values must be input in valid format – that is, 999-99-9999 for SSN or ITIN, and 99-9999999 for EIN. Format validation will not occur for FOREIGN Input Identifiers.

2.2.7. Customer ID

The Customer ID, also known as CAT Customer ID or CCID, is a unique identifier generated by the Plan Processor, that is defined within SEC Rule 613(j)(5) as "with respect to a customer, a code that uniquely and consistently identifies such customer for purposes of providing data to the central repository." The CCID is a globally unique identifier generated for each unique TID value generated from a well-formatted and valid Input Identifier, in a way that is not reversible to the TID or textual Input Identifier value. The

translation of TID to CCID is completed in the CCID Subsystem, in isolation from any of the Customer or Account reference data.

The CCID value is never provided to CAT Reporters or Submitters and is only used within CAT to uniquely reference a single Customer.

2.2.8. CCID Subsystem

The CCID Subsystem is an isolated subsystem of CAT CAIS that exists solely to translate input TID values into CCID values. The Transformed Identifiers file, sent only to the CCID Subsystem and containing the combination of the Customer Record ID pointer and TID, translates the TID to CCID, and passes the combination of Customer Record ID and CCID to the CAIS Data Subsystem, where the Customer Record ID is used to associate the assigned CCID with the corresponding customer record.

2.2.9. CAIS Data Subsystem

The CAIS Data Subsystem is an isolated subsystem of CAT CAIS that exists for receipt and storage of customer and account data. The Data file, sent only to the CAIS Data Subsystem and containing the customer and account submission data, receives the combination of Customer Record ID and CCID from the CCID Subsystem, and associates the assigned CCID with the corresponding customer data.

The following diagram provides an overview of the flow of translating Input Identifiers to TID values by the reporting firm, the separation of the TID data from the customer and account reference data, and the translation of TID values to CCID values in the isolated CCID Subsystem so that TID is never known to the CAIS Data Subsystem.

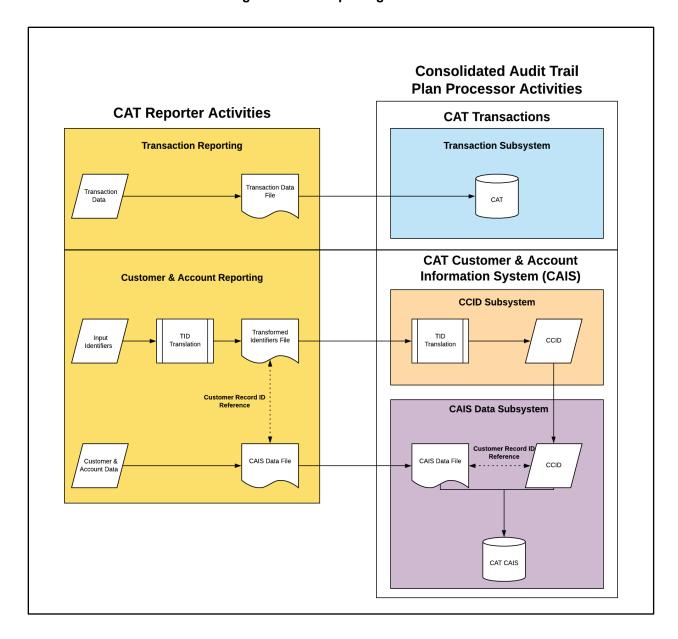


Figure 1: CAT Reporting Activities

2.2.10. Reportable Identifier

A Reportable Identifier is a generic term used to reference any customer identifiers that are to be included in plain text form in submissions to CAT in the CAIS Data file. It is both possible and acceptable for an Input Identifier to also be a Reportable Identifier. The list of Reportable Identifiers includes:

- Employer Identification Number (EIN)
- Legal Entity Identifier (LEI)
- Large Trader ID (LTID)/Unidentified Large Trader ID (ULTID)

2.2.11. Data Inconsistency

In accordance with the CAT NMS Plan Appendix D, Section 9.4, the CAT system must implement procedures and mechanisms to handle both minor and material inconsistencies in Customer information submitted to CAT.

Material Inconsistencies require correction within the established Deadline of Repair for Errors Identified by CAIS described in the <u>Deadline of Repair for Errors Identified by CAT CAIS</u> section of this document. **Minor Inconsistencies** are provided to the CAT Reporter Firms for informational purposes only, and do not require correction.

There are three areas in which Inconsistencies can occur:

- Within a single submission file of a CAT Reporter Firm
- Across multiple submission files of a single CAT Reporter Firm either through updates to key characteristics of a single Customer record, or consistent key characteristics data across multiple Customer records
- Across multiple submission files of multiple CAT Reporter Firms OR the same CAT Reporter Firm
 paired with differing Correspondent firms either through inconsistent data for key characteristics
 of a single Customer record, or consistent key characteristics data across multiple Customer
 records

2.2.12. Material Inconsistencies Procedure

The process by which Material Inconsistencies are identified and reported back to CAT Reporter Firms is known as the Material Inconsistencies Procedure. Notification of Material Inconsistencies, as well as the window for Material Inconsistencies repair, will occur in two phases, as follows:

The Reporter and Correspondent pairing whose submission data is Materially Inconsistent when
compared to the data currently stored within CAIS - whether the currently stored data was
entered by that same Reporter or another Reporter - is referred to as the "Triggering Firm".
 Information regarding the identified Material Inconsistency will be included in the Feedback file for

the firm's submission and the timeframe for repair will start as of the CAT Trading Day of the firm's submission to CAIS. This Triggering Firm must now either confirm the accuracy of the data they have submitted to CAIS, determine the Customer record was an erroneous submission and end the Customer record in a subsequent submission, or submit an update to the Customer record in a subsequent submission.

• The Reporter and Correspondent pairing whose data was previously stored within CAIS, whose data is now determined to be Inconsistent as a result of the submission of the same Customer by another Reporter and Correspondent pairing, is known as the "Impacted Firm". The Impacted Firm's notification and subsequent correction window will not start until the Triggering Firm first resolves for the Inconsistency. If the Triggering Firm confirms to the validity of the data that triggered an inconsistency, the Impacted Firm will then be notified of the Inconsistency via the 'Inconsistency Feedback' file, at which time their repair window will start. If the Triggering Firm corrects their submission data, either by ending the Customer record or by submitting an update to the Customer record resulting in their data being consistent with the existing record in CAIS, the Impacted Firm will not be notified of the temporary Inconsistency for the Customer, and would not need to take any action.

2.2.13. Notification of Customer Record Updates

In the event that a CAT Reporter Firm is submitting an update to key identifying attributes for its previously submitted Customer Record which would result in the identification of a Material Inconsistency, the CAT Reporter may include notification of the intent to update these attributes within their submission file. When the CAT Reporter includes this proactive notification, CAIS will not generate a Material Inconsistency notification for the reported Customer. Instead, CAIS will include an Update Confirmation notification in the feedback file for the CAT Reporter Firm, confirming the update to a key identifying attribute was accepted by CAIS.

If a CAT Reporter Firm does not appropriately use the update notification function, it will be notified that the Customer data they submitted to CAT has resulted in a Material Inconsistency. The CAT Reporter Firm must then submit the same Customer record with all appropriate data, and include the update notification in this submission. This will result in closure of the Material Inconsistency. Failure to include the update notification when submitting a CAT Customer that has an open Material Inconsistency will result in a rejection against the submitted CAT Customer, and will not result in any update to the stored data for the inconsistent customer record nor closure of the Material Inconsistency. Ending the Customer record having the Material Inconsistency will also result in closure of the Material Inconsistency.

In the event that a CAT Reporter Firm has previously submitted a specific combination of a Foreign TID Type, Foreign TID Country Code, and Foreign TID Value with a Customer Record Type – that is, Natural

Person or Legal Entity – and subsequently submits the same combination of a Foreign TID Type, Foreign TID Country Code, and Foreign TID Value with a different Customer Record Type, a Material Inconsistency will be identified against the two Customer Records. To resolve this Material Inconsistency, the CAT Reporter Firm must submit the appropriate Customer Record Type with the Update Confirmation noted on it. When this submission occurs, the Plan Processor will end the incorrect Customer Record Type and close both Material Inconsistencies.

The following table details the attribute set for Customer record data submissions and what level of Inconsistency checking is applied against the attribute, as well as whether or not it is possible to provide an Update Confirmation of the attribute and what standardization will be applied to the attribute in an effort to reduce the appearance of inconsistencies resulting from insignificant differences in reported data.

Table 3: Customer Data Inconsistencies

Attribute	Customer Record Type	Material/Minor Inconsistency Validation	Update Notification Eligible	Standardizations Applied by Plan Processor
Customer Record Type (i.e., Natural Person or Legal Entity)	N/A	Material	Yes	None; as noted above, Plan Processor will inactivate the Customer Record of the Customer Record Type that is not resubmitted with the updateNotification flag
Customer Start Date	Both	N/A	No	None
First Name	Natural Person	N/A	No	Punctuation, White Space Trimming
Middle Name	Natural Person	N/A	No	Punctuation, White Space Trimming
Last Name	Natural Person	N/A	No	Punctuation, White Space Trimming
Name Suffix	Natural Person	N/A	No	None
Year of Birth	Natural Person	Material	Yes	None
Legal Name	Legal Entity	N/A	No	Punctuation, White Space Trimming, Incorporation Types (Limited:LTD, Corporation:CORP, etc.)
Customer Type	Both	N/A	No	None
Address Line 1	Both	N/A	No	Punctuation, White Space Trimming, Directionality, and Street Standardization
Address Line 2	Both	N/A	No	Punctuation, White Space Trimming, Directionality, and Street Standardization
Address Line 3	Both	N/A	No	Punctuation, White Space Trimming, Directionality, and Street Standardization
Address Line 4	Both	N/A	No	Punctuation, White Space Trimming, Directionality, and Street Standardization
City	Both	N/A	No	Punctuation, White Space Trimming
Region Code	Both	N/A	No	Punctuation, White Space Trimming

Country Code	Both	N/A	No	None
Postal Code	Both	N/A	No	None
EIN	Legal Entity	Material	No	None
LEI	Legal Entity	N/A	No	None
LTID	Both	N/A	No	None

2.3. Data Types

CAT customer and account data must be reported using JSON text files. Data types used throughout this document are described below. Data types used for CAT customer and account reporting are a subset of the data types used for CAT transaction reporting, with the following differences:

• Timestamp - only STRING versions of timestamp are supported in customer and account reporting

To support JSON submissions, the Industry Member Customer & Account Schema (JSON) file is available on the CAT public website that describes each data type with required representation formats.

2.3.1. Data Validation Based on Data Types

All customer and account data submitted to CAT will be validated based on the defined data type of each item, including proper formatting and range checking. Examples of accepted values are detailed in the table below. Valid values for Choice fields are defined in the Data Dictionary for each data element. Valid data values, ranges, and formats will be specified in the record schema files, which will be used to validate submitted data element values. Records and values that fail validation will be rejected and will be reported as feedback to the Reporter and Data Submitter as detailed in Section 6.

Table 4: Data Types

Data Type	JSON Type	Description	
Unsigned	NUMBER	An unsigned value, greater than or equal to zero, with no decimal fraction component, in the inclusive range from 0 to 9,223,372,036,854,775,807 (the same range as a 63-bit unsigned integer).	
Boolean	BOOLEAN	A value with two choices: true or false. In JSON representation, if the fie not present, the value is considered false.	
Alphanumeric	STRING	A string, composed only of letters and digits [a-zA-Z0-9]. When an Alphanumeric type is described, it will include a number, indicating the maximum length of the field. For example, Alphanumeric (7) means that the field can contain up to 7 characters. Alphanumeric values are case sensitive.	
		A string, composed of any printable ASCII character between 32 and 126. The string may not include the following characters which serve as delimiters:	
		comma (ASCII decimal 44, hex 2C),	

pipe (ASCII decimal 124, hex 7C), double quote (ASCII decimal 34, hex 22), and @ (ASCII decimal 64, hex 40). When a Text data type is described, it will include a number, indicating maximum length of the field. For example, Text (7) means that the field contain up to 7 characters. Text values are case sensitive. When represented in JSON, the following rule applies: Backslash '\' is a reserved printable character in JSON and must be escaped in order to used in strings by inserting a backslash prior to it within the string. For example: firmDesignatedID': "1234\ABCD must be reported to CAT as "firmDesignatedID": "1234\ABCD". If the backslash is not escaped, the submitted record will be rejected. Escape characters do not participate the field value length. Date NUMBER A 8-digit integer representing the date in YYYYMMDD. Year NUMBER A 4-digit integer representing the year in YYYY. Timestamp STRING A 4-digit integer represents a moment in time. All timestamps must be in Eastern Time (ET). Timestamps formatted as a STRING have a maximum length of 25 and formatted as 'YYYYMMDD HHMMSS.CCCNNNNNN' with the Date and Time portions, separated by a space (ASCII decimal 32, hex 20) or the T (ASCII decimal 84, hex 54).	pe n are
	pe n are
When a Text data type is described, it will include a number, indicating maximum length of the field. For example, Text (7) means that the field contain up to 7 characters. Text values are case sensitive. When represented in JSON, the following rule applies: Backslash '\' is a reserved printable character in JSON and must be escaped in order to used in strings by inserting a backslash prior to it within the string. For example: firmDesignatedID = 1234\ABCD must be reported to CAT as "firmDesignatedID": "1234\\ABCD". If the backslash is not escaped, the submitted record will be rejected. Escape characters do not participate the field value length. Date NUMBER An 8-digit integer representing the date in YYYYMMDD. Year NUMBER A 4-digit integer representing the year in YYYY. Timestamp STRING A timestamp represents a moment in time. All timestamps must be in Eastern Time (ET). Timestamps formatted as a STRING have a maximum length of 25 and formatted as 'YYYYMMDD HHMMSS.CCCNNNNNN' with the Date and Time portions, separated by a space (ASCII decimal 32, hex 20) or the	pe n are
maximum length of the field. For example, Text (7) means that the field contain up to 7 characters. Text values are case sensitive. When represented in JSON, the following rule applies: Backslash '\' is a reserved printable character in JSON and must be escaped in order to used in strings by inserting a backslash prior to it within the string. For example: firmDesignatedID = 1234\ABCD must be reported to CAT as "firmDesignatedID": "1234\ABCD". If the backslash is not escaped, the submitted record will be rejected. Escape characters do not participate the field value length. Date NUMBER An 8-digit integer representing the date in YYYYMMDD. Year NUMBER A 4-digit integer representing the year in YYYY. Timestamp STRING A timestamp represents a moment in time. All timestamps must be in Eastern Time (ET). Timestamps formatted as a STRING have a maximum length of 25 and formatted as 'YYYYMMDD HHMMSS.CCCNNNNNN' with the Date and Time portions, separated by a space (ASCII decimal 32, hex 20) or the	pe n are
reserved printable character in JSON and must be escaped in order to used in strings by inserting a backslash prior to it within the string. For example: firmDesignatedID = 1234\ABCD must be reported to CAT as "firmDesignatedID": "1234\ABCD". If the backslash is not escaped, the submitted record will be rejected. Escape characters do not participate the field value length. Date NUMBER A 8-digit integer representing the date in YYYYMMDD. Year NUMBER A 4-digit integer representing the year in YYYY. Timestamp STRING A timestamp represents a moment in time. All timestamps must be in Eastern Time (ET). Timestamps formatted as a STRING have a maximum length of 25 and formatted as 'YYYYMMDD HHMMSS.CCCNNNNNN' with the Date and Time portions, separated by a space (ASCII decimal 32, hex 20) or the	n are
Year NUMBER A 4-digit integer representing the year in YYYY. Timestamp STRING A timestamp represents a moment in time. All timestamps must be in Eastern Time (ET). Timestamps formatted as a STRING have a maximum length of 25 and formatted as 'YYYYMMDD HHMMSS.CCCNNNNNN' with the Date and Time portions, separated by a space (ASCII decimal 32, hex 20) or the	
Timestamp A timestamp represents a moment in time. All timestamps must be in Eastern Time (ET). Timestamps formatted as a STRING have a maximum length of 25 and formatted as 'YYYYMMDD HHMMSS.CCCNNNNNN' with the Date and Time portions, separated by a space (ASCII decimal 32, hex 20) or the	
Eastern Time (ET). Timestamps formatted as a STRING have a maximum length of 25 and formatted as 'YYYYMMDD HHMMSS.CCCNNNNNN' with the Date and Time portions, separated by a space (ASCII decimal 32, hex 20) or the	
formatted as 'YYYYMMDD HHMMSS.CCCNNNNNN' with the Date and Time portions, separated by a space (ASCII decimal 32, hex 20) or the	
• The Date portion must include four-digit year, two-digit month, and digit day. Valid values: YYYY = 0000 - 9999, MM = 01 - 12, DD = 0 31.	
The Time portion must include a two-digit hour, two-digit minute, a two-digit seconds. Valid values: HH = 00 - 23, MM = 01 - 59, SS = 59, CCC = 000 – 999, NNNNNN = 000000 - 999999.	
Examples which comply with Timestamp in STRING format:	
• 20190617T000120.000000000	
• 20190617T000120	
• 20190617T000120.000	
• 20170107T213000.123456789	
• 20170107 213000.123456789	
• 20190617 000120.123000000	
Examples which do not comply with Timestamp in STRING format:	
Examples which do not comply with Timestamp in STRING format: • 20190617T0120	
• 20190617T000120.	
Name/Value Pairs OBJECT An object composed of a list of zero or more attributes where each attri is either a name with no value, or a name with an accompanying value. Multiple attributes are separated by a delimiter.	oute
When represented in ISON the fallowing rules apply:	
 When represented in JSON, the following rules apply: The OBJECT is contained within curly brackets { } 	
Name/Value Pairs are comma separated	
A value accompanied by a name must be formatted as per the data	

Data Type	JSON Type	Description	
		type syntax required in JSON	
Array	ARRAY	A list of 0, 1 or more values of the same data type.	
		When represented in JSON, the following rules apply:	
		ARRAY is within a set of brackets []	
		Elements within the array are comma separated.	
Choice	STRING	A Text field with an explicit list of acceptable values. The Data Dictionary section of this document lists the acceptable values for each Choice field.	
Multi- Dimensional Array	Multi- Dimensional ARRAY	A compound object that consists of an array of objects. The JSON syntax for this data type is consistent with other Multi-Dimensional Array JSON Types. Multi-Dimensional Array is specified as the data type within the Submissions file as well as the Feedback response file.	
		When represented in JSON, the following rules apply:	
		ARRAY is within a set of brackets []	
		Each OBJECT contained in the ARRAY is within curly brackets { }	
		Elements within each object are comma separated	
		Conditional elements that do not have a value are not required to be included.	
Hexadecimal	String	A string, composed only of valid hexadecimal characters [a-fA-F0-9]. When a Hexadecimal type is described, it will include a number, indicating the maximum length of the field. For example, Hexadecimal (7) means that the field can contain up to 7 characters. Hexadecimal values are case insensitive.	

2.3.2. Required, Conditional, and Optional Fields

Throughout this document, record attribute fields will be defined. Each field will be notated with the abbreviation R, C, or O to represent whether it is required, conditional, or optional. This codification will appear within each row of a table describing a field.

Table 5: Include Key

Value	Abbreviation	Description
Required	R	Required for the given record. This field must always be included.
Conditional	С	Conditionally required for the submission, depending upon other values submitted on the account record.
Optional	0	Optional for the given record. May be included at the discretion of the reporter/submitter.

3. Special Reporting Requirements

3.1. Replacement of FDIDs

The current functionality provided to CAT Reporters enables the replacement of a single FDID record at a time using the replacedByFDID attribute. If a CAT Reporter desires to replace one or more of their FDID records for any reason, they are able to do so by submitting each individual FDID to be replaced and the replacedByFDID attribute indicating which FDID has taken its place. There is no limit on how many FDID records can be replaced within a submission file, other than the standing record limits for file transmission.

3.2. Mass Transfer of FDIDs across CAT Reporter Firms

In the instance of account transfers from one CAT Reporter Firm to another, resulting from corporate events such as mergers/acquisitions/divestitures, it is required by the CAT NMS Plan to have a means of linking the accounts from the prior firm to those of the new firm. There will be two mechanisms enacted by which this activity can occur:

- A procedure will be created to automate transfer of all reported active FDIDs from the transferring CAT Reporter CRD to the receiving CAT Reporter CRD. The receiving CAT Reporter Firm must contact the FINRA CAT Help Desk to provide notification of an upcoming transfer event, including the expected date for closure of the transfer.
- Additional attributes will be added to the CAIS Data Submission file that allows the transferring
 and receiving CAT Reporter Firms to report the transfer activity. The transfer mechanisms are
 only to be used for instances of mass account transfers. In the event that assets or holdings of a
 single account are transferred from one firm to another, it is not required to report this asset
 transfer to CAT.

3.2.1. Automated Transfer Procedure

In the instance the transferring and receiving CAT Reporter Firms requested automated transfer of account and customer data, the receiving CAT Reporter Firm must contact the FINRA CAT Help Desk to provide notification of an upcoming transfer event. A report will be generated by the Plan Processor and provided to the receiving CAT Reporter Firm, detailing any active FDIDs of the transferring CAT Reporter Firm that collide with an FDID of the receiving CAT Reporter Firm, as well as indication of CAT Customers that are present from both the transferring and receiving firms. It is the obligation of the receiving CAT Reporter Firm to ensure any FDID collisions are resolved in advance of closure of the transfer event.

Following closure of the transfer event, the Plan Processor will create a copy of the active FDIDs and associations to customers present under the transferring CAT Reporter Firm into the CRD of the receiving CAT Reporter Firm. Any new customer records that have not previously been submitted by the receiving firm CAT Reporter Firm will also be created from the data of the transferring CAT Reporter Firm into the CRD of the receiving CAT Reporter Firm. All FDIDs and customer associations of the transferring CAT Reporter Firm will then be closed out by the Plan Processor on behalf of the transferring firm as of the date of the transfer event. No submissions by the transferring CAT Reporter Firm CRD will be accepted following the closure of the transfer event.

3.2.2. Transfers enacted in CAIS Data Reporting

In order to enact transfers of account records from one CAT Reporter Firm to another, the transferring CAT Reporter must report the end of the FDID record by setting the fdidEndReason as "TRANSFER."

The receiving CAT Reporter Firm acquiring the accounts must report in their submission file the FDID their firm has assigned to the account, the CRD of the transferring CAT Reporter Firm as the priorCATReporterCRD value, and must also provide the FDID value assigned to the acquired account by the transferring CAT Reporter as the priorCATReporterFDID.

When using this approach, FDID, LTID, and Customer data of the transferring CAT Reporter Firm will not be moved to the acquiring CAT Reporter Firm by the Plan Processor. It is the obligation of the receiving CAT Reporter Firm to submit all FDID, LTID, and Customer data of the acquired accounts.

3.3. Translation of Input Identifiers to TID Values

For each Input Identifier that is to be used to uniquely identify a single Customer, the identifier must be input in the exact valid format – that is, 999-99-9999 for SSN or ITIN, and 99-9999999 for EIN – to a SHA-256 hashing algorithm. The 32 bytes output from the SHA-256 hashing algorithm must be then represented as a 64 byte hexadecimal value. This resulting output is the TID value that must be reported to CAT CAIS and will be treated as case-insensitive. It is the responsibility of the CAT Reporter to translate the Input Identifier to a TID. The Plan Processor will conduct validations against the submitted TIDs to ensure the Input Identifier used to generate the TID was in the appropriate format and is from a valid range for the identifier type, as follows:

1. For SSN and ITIN

- a. No values having an Area Number (first three digits) of 000 nor 666.
- b. No values having a Group Number (middle two digits) of 00.
- c. No values having a Serial Number (last four digits) of 0000.
- d. No values all of the same digit such as 111-11-1111, 333-33-3333, 666-66-6666, nor 123-45-6789.

2. For EIN

a. Must have a valid prefix (first two digits), as noted by the Internal Revenue Service.

3. For Foreign

a. No range validation will occur for TIDs generated from Foreign identifiers

3.4. Translation of TID to CCID Values

Each valid and unique input TID will result in the generation of a cryptographically randomized CCID generated by the Plan Processor. This resulting CCID will be unique for the specific input TID, and will be the resulting CCID each time the same TID is input for translation. The resulting CCID will not be returned to the CAT Reporter, will not be able to be reversed to the input TID, and is only used within the CAT to uniquely identify a single Customer without storage of Input Identifiers.

3.5. Transition from LTID to Full Customer Reporting

The transition from LTID to Full Customer Reporting includes significant additions to the attributes included on an FDID record, as well as the addition of Customer-to-FDID associations and Customer records. In order to reduce concerns of data submitted to CAIS getting out of alignment with data currently stored in a CAT Reporter Firm's systems, CAIS submissions are being changed from a Delta Files with Delta Record Attributes and Associations approach to Delta Files with Full Record Attributes & Associations.

For the LTID phase, it was permissible to exclude optional or conditional attributes previously submitted for an FDID or LTID, and no implicit update was made to these values stored in CAIS. If a Firm intended to clear a previously submitted value, they were required to use the paired NULL attribute for the field. Since Firms are not permitted to view their record data as currently stored in CAIS, this raised concerns that the data could get out of alignment. To remove that concern in the Full Customer Reporting phase, it is now required to include all attributes and associations for each record within the file. CAT Reporter Firms are still only required to include records in their submission when changes occur, however each record present in the file must contain the current state of attributes and associations of the record.

The sole exception to this inclusion of all current attributes and associations is Customer associations that were previously stored, where the FDID is not included in the current submission but at least one of its associated Customers is included. In this event, the Customer-to-FDID associations for the FDIDs that are not included in the submission file will not be implicitly updated. As an example:

- An initial submission file contains two FDIDs, FDID A and FDID B. FDID A has an association to Customer 1; FDID B has associations to Customer 1 and Customer 2.
- A subsequent submission file contains only FDID B and only contains an association to Customer
 2.

In this event, the association from FDID B to Customer 1 is implicitly ended; however, the
association from FDID A to Customer 1 is not implicitly ended because FDID A is not included in
the submission file.

3.6. Full Data Replacement Submission

In the event a CAT Reporter Firm determines that they are unable to continue supporting previously submitted CAT data and require a full replacement of FDID and CAT Customer data, a process will be established by the Plan Processor to end all existing entries of the firm. This will be enacted by the CAT Reporter Firm contacting the FINRA CAT Help Desk to schedule a full replacement. The Plan Processor will end all FDIDs, LTID associations, Customer associations, and CAT Customer records of the CAT Reporter Firm as of the scheduled replacement. The CAT Reporter Firm must then submit all data – including FDIDs, LTID associations, Customer associations, and CAT Customer records – again to CAIS.

3.7. Periodic Full Data Refresh

This section intentionally left blank.

3.8. Reporting Multiple Versions of a CAT Customer

In the event that a CAT Reporter Firm has multiple versions of a single CAT Customer, as reconciled to a single Input Identifier and therefore a single TID, it is permitted to include the versions of the CAT Customer within the submission files, with differing *customerRecordID* values. The versions of the CAT Customers, however, must not contain differing values for the following fields:

- Reporting a FOREIGN tidType record as both Natural Person and Legal Entity customer record types
- customerStartDate, customerEndDate, or customerEndReason
- *yearOfBirth* (Natural Person customers only)
- ein (Legal Entity customers only)

If the submission files contain differing values on any of the above fields, all instances of the CAT Customer within the file will be rejected.

The data stored in CAIS will consist of the merged set of entries across the submitted versions of the CAT Customer. For example, if the CAT Customer is reported with three different values for the First Name value, each of the name values will be stored in CAIS.

3.9. Tracking of Historical CAT Customer Names

In order to support Regulatory understanding of historical CAT Customer records, previously reported names of the CAT Customer will be retained in association to the currently submitted state of the record, even when the name value is not included in a subsequent submission of the CAT Customer record.

3.10. Special Rules Regarding FDID Characters

The following are rules regarding specific handling of characters used to generate FDIDs, following the change to allow a broader set of characters.

- An FDID reported as the value "PENDING", regardless of case, will be rejected. The value of PENDING is used in CAT Transaction reporting when an FDID is required for the event, but not available at the time of reporting; however, the value is not valid for reporting to CAIS. Once an FDID has been assigned by the Industry Member, it must be reported to CAIS in the phase in which the Industry Member is required to report to CAIS.
- Inclusion of any of the following character combinations in an FDID will result in rejection of the FDID due to JSON data parsing rules unless the backslash is properly escaped:
 - o \b
 - o \r
 - \f
 - o \n
 - o \t
 - o \"
- A backslash that is followed by any character other than the ones noted above, will result in the file having an Integrity Error for invalid JSON, unless the backslash is properly escaped.
- As an example of a properly escaped backslash, if a firm has an FDID of "1234\ABCD", they
 would be required to report this to CAIS as "1234\ABCD".
- Leading and trailing spaces in an FDID will be removed during processing, and the string between them will be stored in CAIS. Spaces bounded by other characters within the FDID string will be retained.
- An FDID that consists of only spaces will be rejected.

4. CAIS Reporting

This section describes the attributes for inclusion within the CAIS submission file. All submissions to CAIS are required to be in UTF-8 encoding. The following table lists each record attribute in JSON naming convention, as well as corresponding Data Types, Include Key, acceptable Occurrences, Description, and Format or Accepted Values for a Choice-type attribute. A single submission to CAIS will require a paired set of a CAIS Data File and a Transformed Identifiers file, as defined in 5.1 - File Submissions and Data Formats.

4.1. CAIS Data File

The CAIS Data File contains the list of FDID records and associated data, the core Customer data attributes excluding TID, and the relationships between the two. For security considerations, CAIS Data File must not contain the TID data; this is to be provided in the Transformed Identifiers File. A single CAIS Data File is to be submitted in a pairing with a single Transformed Identifiers File.

Table 6: CAIS Data File

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
version	Text (10)	Main	R	Exactly One per submission file	The version of the CAIS Schema under which the data is reported. The version utilized for full Customer reporting will be 2.0.0.	2.0.0
catReporterCRD	Unsigned	Main	R	Exactly One per submission file	The CRD number assigned to the firm to which the data within the file belongs.	
catSubmitterID	Unsigned	Main	R	Exactly One per submission file	The ID of the CAT Reporting Agent that submitted the file to CAT. In the case the CAT Reporter is submitting data for themselves, they must still populate the CAT Submitter ID field.	

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
correspondentCRD	Unsigned	Main	С	Zero or One per submission file	The CRD number of the related Introducing Broker or Correspondent firm, if applicable. All FDID and Customer data included in the file will be associated to the catReporterCRD and correspondentCRD pairing.	
fdidRecordCount	Unsigned	Main	R	Exactly One per submission file	The count of firmDesignatedID attribute occurrences within the file. Used to validate the count of FDID records intended to be submitted within the file matches the count of records present in the file.	
naturalPersonCustom erRecordCount	Unsigned	Main	R	Exactly One per submission file	The count of customerRecordID attribute occurrences within the file for Natural Person type Customers. Used to validate the count of Natural Person Customer records intended to be submitted within the file matches the count of records present in the file.	
legalEntityCustomerR ecordCount	Unsigned	Main	R	Exactly One per submission file	The count of customerRecordID attribute occurrences within the file for Legal Entity type Customers. Used to validate the count of Legal Entity Customer records intended to be submitted within the file matches the count of records present in the file.	
fdidRecordList	Multi-Dimensional Array	Main	С	Zero or One per submission file	Structure for the array of FDID Records that are included in the file.	

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					Required if the submission file contains one or more FDID records; not required if no FDID records are included in the file.	
fdidRecordID	Unsigned	FDID Record	R	Exactly One per FDID Record	A unique reference to a single FDID for a single submission file.	
firmDesignatedID	Text (40)	FDID Record	R	Exactly One per FDID Record	The Firm Designated ID of the Account or Relationship being reported by the CAT Reporting firm.	
fdidType	Choice	FDID Record	R	Exactly One per FDID Record	Representation of the type of record of the reported FDID. Values: ACCOUNT – Account type record RELATIONSHIP – Relationship type record ENTITYID – Entity Identifier type record	"ACCOUNT" "RELATIONSHIP" "ENTITYID"
accountType	Array [Choice]	FDID Record	R	Exactly One per FDID Record	Representation of the type or types of Account the FDID represents. All applicable values for the FDID must be included in the array. Values: ADVISED — Indicates the account has been identified by the firm as an advised account AVERAGE — Average price account BROKERAGE — Indicates the account has been identified by the firm as a brokerage account DVP/RVP — Delivery versus Payment account/Receipt versus Payment	"ADVISED" "AVERAGE" "BROKERAGE" "DVP/RVP" "EDUCATION" "ERROR" "FIRM" "INSTITUTION" "MARKET" "MARGIN" "OPTION" "OTHER" "RETIREMENT" "UGMA/UTMA"

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					account EDUCATION – Established for education savings including 529 Plan or Coverdale ESA ERROR – Error account FIRM – Is owned by the reporting firm, including proprietary trading accounts and inventory accounts INSTITUTION – An institutional account as defined in FINRA Rule 4512(c) MARKET – Market Making Account MARGIN – Approved for trading on Margin OPTION – Approved for trading Options OTHER – Other undefined account RETIREMENT – As defined by the IRS: • Individual Retirement Arrangements (IRAs) • Roth IRAs • 401(k) Plans • 403(b) Plans • SIMPLE IRA Plans (Savings Incentive Match Plans for Employees) • SEP Plans (Savings Incentive Match Plans for Employees) • SEP Plans (Simplified Employee Pension) • SARSEP Plans (Salary Reduction Simplified Employee Pension) • Payroll Deduction IRAs • Profit-Sharing Plans • Defined Benefit Plans • Money Purchase Plans • Employee Stock Ownership Plans (ESOPs) • Governmental Plans	Accepted Values

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					• 457 Plans UGMA/UTMA — Established as a custodial account under the Uniform Gift to Minors Act or Uniform Transfer to Minors Act	
accountName	Text (40)	FDID Record	R	Exactly One per FDID Record	The name applied to the Account, Relationship, or EntityID at the CAT Reporter Firm.	
primeBrokerID	Array [Alphanumeric (4)]	FDID Record	С	Zero or One per FDID Record	Clearing number of the account's prime broker. Must be provided if the accountType includes DVP/RVP and the custodian of the account is a broker/dealer.	
bankDepositoryID	Array [Alphanumeric (5)]	FDID Record	С	Zero or One per FDID Record	The identifying number of the depository institution for the FDID. Must be populated if the accountType includes DVP/RVP and the custodian of the account is not a broker/dealer.	
clearingBrokerID	Array [Alphanumeric (4)]	FDID Record	С	Zero or One per FDID Record	The NSCC Clearing ID of the firm that clears the accounts. Must be populated if known to the CAT Reporter firm.	
branchOfficeCRD	Unsigned	FDID Record	R	Exactly One per FDID Record	The Central Registration Depository system generated CRD Branch Number assigned when the CAT Reporter Firm filed Form BR.	
registeredRepCRD	Array [Unsigned]	FDID Record	С	Zero or One per FDID Record	The Central Registration Depository ID assigned to the Registered Representative of the FDID. Must be provided if known to the CAT Reporter firm. All CRDs included in the array must be only	

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					numeric values, must not contain any leading zeroes, and must be separated by commas.	
fdidDate	Date (Number) (8)	FDID Record	R	Exactly One per FDID Record	Date on which the FDID account opened, as defined in Section 2.2.3 of this specification, in YYYYMMDD format.	YYYYMMDD
fdidEndDate	Date (Number) (8)	FDID Record	С	Zero or One per FDID Record	Date on which the Account was closed or the Relationship was ended, in YYYYMMDD format. Must be provided if the fdidEndReason field is populated.	YYYYMMDD
fdidEndReason	Choice	FDID Record	С	Zero or One per FDID Record	Reason why the Account was closed or the Relationship was ended. Must be provided if the fdidEndDate field is populated. Values: CORRECTION – FDID was erroneously reported ENDED – FDID was ended REPLACED – FDID replaced by another FDID within the CAT Reporter Firm. OTHER – Other unlisted reason for ending the FDID TRANSFER - FDID was transferred to another CAT Reporter Firm	"CORRECTION" "ENDED" "REPLACED" "OTHER" "TRANSFER"
replacedByFDID	Text (40)	FDID Record	С	Zero or One per FDID Record	The new FDID replacing the currently reported FDID, used to provide historical linkage across replaced records over time. Must be provided if the fdidEndReason is REPLACED. Must not be provided if the fdidEndReason is any value other	

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					than REPLACED.	
priorCATReporterCR D	Unsigned	FDID Record	С	Zero or One per FDID Record	Indicates the CRD of the CAT Reporter firm from which the FDID was acquired. Must be provided if FDID was acquired by the CAT Reporter. Must be provided if priorCATReporterFD ID is populated.	
priorCATReporterFDI D	Text (40)	FDID Record	С	Zero or One per FDID Record	Indicates the original FDID for the record acquired by the current CAT Reporter firm. Must be provided if FDID was acquired by the CAT Reporter.	
addressList	Multi-Dimensional Array	FDID Record	R	Exactly One per FDID Record	Structure for the array of Address records that are associated to the FDID record within the file. At a minimum, an ADDRESS1 record must be included for each FDID record within the file. Additional addresses may be included for the FDID if available within the CAT Reporter Firm's system.	
addrType	Choice	Addres s Record	R	Exactly One per Address Record	The type of the Address record. Values: ADDRESS1 – The first address record of the FDID. ADDRESS2 – The second address record of the FDID. ADDRESS3 – The third address record of the FDID. ADDRESS4 – The fourth address record of the FDID.	"ADDRESS1" "ADDRESS2" "ADDRESS3" "ADDRESS4"
addrLine1	Text (40)	Addres s Record	R	Exactly One per Address Record	The first Address Line for the Address record.	
addrLine2	Text (40)	Addres s	0	Zero or One per Address	Additional space for Address Line.	

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
		Record		Record		
addrLine3	Text (40)	Addres s Record	0	Zero or One per Address Record	Additional space for Address Line. Must not be provided if addrLine2 is not provided.	
addrLine4	Text (40)	Addres s Record	0	Zero or One per Address Record	Additional space for Address Line. Must not be provided if addrLine2 and addrLine3 are not provided.	
city	Text (100)	Addres s Record	R	Exactly One per Address Record	City of the Address.	
regionCode	Text(40)	Addres s Record	С	Zero or One per Address Record	Code of the local region of the Address, in ISO 3166-2 format with the two character Country Code. Please view the reference data list for acceptable values. Must be provided if a region list is available for the Country of the Address. Optional to provide if no region list is available for the Country of the Address.	AA-Xxx
countryCode	Choice	Addres s Record	R	Exactly One per Address Record	Code of the Country of the Address, in ISO 3166-1 alpha-2 format. Please view the reference data list for acceptable values.	AA
postalCode	Text (15)	Addres s Record	С	Zero or One per Address Record	Postal Code of the Address. Must be provided if Postal Codes exist for the Country of the Address. Please view the reference data list for acceptable formatting per Country.	
largeTraderList	Multi-Dimensional Array	FDID Record	С	Zero or One per FDID Record	Structure for the array of LTID and ULTID records that are associated to the FDID record within the file. Required if the submission file	

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					contains one or more LTID/ULTID records associated to the FDID record; not required if no LTID/ULTID records are included in the file in association to the reported FDID.	
largeTraderRecordID	Unsigned	Large Trader Record	R	Exactly One per Large Trader Record	A unique reference to a single LTID or ULTID in reference to a single FDID for a single submission file.	
largeTraderID	Text (13)	Large Trader Record	R	Exactly One per Large Trader Record	The LTID or ULTID associated to the FDID in the CAT Reporter's system. For LTID records, the identifier must be eight numeric characters, followed by a dash, followed by four numeric characters. For ULTID records, the identifier must start with 'ULT', followed by alphanumeric [0-9A-Z] characters for the fifth through eighth positions, followed by a dash, followed by four alphanumeric [0-9A-Z] characters.	For LTID — 99999999999999999999999999999999999
ItidEffectiveDate	Date (Number) (8)	Large Trader Record	R	Exactly One per Large Trader Record	Date on which the LTID or ULTID became associated to the FDID within the CAT Reporter's system, in YYYYMMDD format.	YYYYMMDD
ItidEndDate	Date (Number) (8)	Large Trader Record	С	Zero or One per Large Trader Record	Date on which the LTID or ULTID was no longer associated to the FDID within the CAT Reporter's system, in YYYYMMDD format. Must be provided if the ItidEndReason field is populated.	YYYYMMDD
ItidEndReason	Choice	Large Trader Record	С	Zero or One per Large Trader Record	Reason why the LTID or ULTID was no longer associated to the FDID. Must be populated in order to	"CORRECTION" "ENDED" "REPLACED" "OTHER"

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					end date an LTID-to-FDID association in the system. Must be provided if the ltidEndDate field is populated. Values: CORRECTION — LTID was erroneously reported ENDED — LTID-to-FDID association was ended REPLACED — LTID was replaced by a different LTID or the FDID was replaced by a different LTID or the FDID was replaced by a different LTID or the FDID system of the LTID-to-FDID association TRANSFER — LTID association TRANSFER — LTID association was ended because the FDID was transferred to another firm	"TRANSFER"
fdidCustomerList	Multi-Dimensional Array	FDID Record	R	Exactly One per FDID Record	Structure for the array of Customer records that are associated to the FDID record within the file.	
customerRecordID	Unsigned	FDID Custom er Record	R	Exactly One per FDID Customer Record	A unique reference to a single Customer in reference to a single FDID for a single submission file.	
role	Choice	FDID Custom er Record	R	Exactly One per FDID Customer Record	Representation of the type of role the Customer has on the FDID. Values: AUTH3RD – An Authorized Trader who is not a holder of the account, nor an employee of the reporting Industry Member, who has authority to place orders for the account AUTHREP – An Authorized Trader	"AUTH3RD" "AUTHREP" "NTHOLDER" "TRDHOLDER"

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					who is an employee of the reporting Industry Member and has authority to place orders for the account NTHOLDER – Holder of the Account that does not have authorization to trade on the Account TRDHOLDER – Holder of the Account that also has authorization to trade on the Account	
hasDiscretion	Boolean	FDID Custom er Record	С	Zero or One per FDID Customer Record	Indicates if the Authorized Trader has the ability to place orders on the account without prior approval of the Holder(s). Not to be provided if role is NTHOLDER or TRDHOLDER.	true false
roleStartDate	Date (Number) (8)	FDID Custom er Record	R	Exactly One per FDID Customer Record	Date on which the Customer entered into the specified role on the account, in YYYYMMDD format.	YYYYMMDD
roleEndDate	Date (Number) (8)	FDID Custom er Record	С	Zero or One per FDID Customer Record	Date on which the customer ceased having the specified role on the FDID, in YYYYMMDD format. Must be provided if the roleEndReason field is populated.	YYYYMMDD
roleEndReason	Choice	FDID Custom er Record	С	Zero or One per FDID Customer Record	Reason why the customer ceased having the specified role on the FDID. Must be provided if the roleEndDate field is populated. Values: CORRECTION – Customer role on FDID was erroneously reported or FDID was erroneously reported ENDED – Customer role on FDID was ended or FDID was ended or FDID was	"CORRECTION" "ENDED" "REPLACED" "OTHER" "TRANSFER"

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					ended REPLACED – Customer role on FDID was ended because the FDID was replaced with another FDID, or because the Customer Input Identifier was replaced with another Input Identifier OTHER – Other unlisted reason for ending the customer role on FDID TRANSFER – Role ended because the FDID was transferred to another firm	
naturalPersonCustom erList	Multi-Dimensional Array	Main	С	Zero or One per submission file	Structure for the array of Natural Person type Customer records that are included in the file. Required if the submission file contains one or more Natural Person customer records; not required if no Natural Person customer records are included in the file.	
customerRecordID	Unsigned	Natural Person Custom er Record	R	Exactly One per Natural Person Customer Record	A unique reference to a single Customer for a single submission file.	
firstName	Text (40)	Natural Person Custom er Record	R	Exactly One per Natural Person Customer Record	The First Name known for the Customer.	
middleName	Text (20)	Natural Person Custom er Record	0	Zero or One per Natural Person Customer Record	The Middle Name known for the Customer.	
lastName	Text (40)	Natural Person Custom er Record	R	Exactly One per Natural Person Customer Record	The Last Name known for the Customer.	

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
nameSuffix	Choice	Natural Person Custom er Record	0	Zero or One per Natural Person Customer Record	The Name Suffix known for the Customer. Values: FIFTH FOURTH JUNIOR SENIOR THIRD	"FIFTH" "FOURTH" "JUNIOR" "SENIOR" "THIRD"
yearOfBirth	Year (Number) (4)	Natural Person Custom er Record	R	Exactly One per Natural Person Customer Record	The Year of Birth known for the Customer in YYYY format.	YYYY
customerStartDate	Date (Number) (8)	Natural Person Custom er Record	R	Exactly One per Natural Person Customer Record	The date on which the customer first became a customer of the CAT Reporter firm, in YYYYMMDD format.	YYYYMMDD
customerEndDate	Date (Number) (8)	Natural Person Custom er Record	С	Zero or One per Natural Person Customer Record	The date on which the customer ceased to be a customer of the CAT Reporter firm, in YYYYMMDD format.	YYYYMMDD
customerEndReason	Choice	Natural Person Custom er Record	C	Zero or One per Natural Person Customer Record	The reason why the customer ceased to be a customer of the CAT Reporter firm. Values: CORRECTION – Customer was erroneously reported DECEASED – Customer is deceased ENDED – Customer ended their relationship with the firm REPLACED – Input Identifier of the Customer was updated and a new Customer was reported in place of this customer OTHER – Other unlisted reason for ending the Customer relationship	"CORRECTION" "DECEASED" "ENDED" "REPLACED" "OTHER"
addressList	Multi-Dimensional Array	Natural Person Custom	С	Zero or One per Natural Person	Structure for the array of Address records that are	

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
		er Record		Customer Record	associated to the Customer record within the file. If the addressList is included, an ADDRESS1 record must be included for the Customer record. Additional addresses may be included for the Customer if available within the CAT Reporter Firm's system.	
addrType	Choice	Addres s Record	R	Exactly One per Address Record	The type of the Address record. Values: ADDRESS1 – The first address record of the customer. ADDRESS2 – The second address record of the customer. ADDRESS3 – The third address record of the customer. ADDRESS4 – The fourth address record of the customer.	"ADDRESS1" "ADDRESS2" "ADDRESS3" "ADDRESS4"
addrLine1	Text (40)	Addres s Record	R	Exactly One per AddressReco rd	The first Address Line for the address.	
addrLine2	Text (40)	Addres sRecor d	0	Zero or One per AddressReco rd	Additional space for Address Line.	
addrLine3	Text (40)	Addres sRecor d	0	Zero or One per AddressReco rd	Additional space for Address Line. Must not be provided if addrLine2 is not provided.	
addrLine4	Text (40)	Addres sRecor d	0	Zero or One per AddressReco rd	Additional space for Address Line. Must not be provided if addrLine2 and addrLine3 are not provided.	
city	Text (100)	Addres sRecor d	R	Exactly One per AddressReco rd	City of the Address.	
regionCode	Text(40)	Addres	С	Zero or One	Code of the local	AA-Xxx

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
		sRecor d		per AddressReco rd	region of the Address, in ISO 3166-2 format with the two character Country Code. Please view the reference data list for acceptable values. Must be provided if a region list is available for the Country of the Address. Optional to provide if no region list is available for the Country of the Address.	
countryCode	Choice	Addres sRecor d	R	Exactly One per AddressReco rd	Code of the Country of the Address, in ISO 3166-1 alpha-2 format. Please view the reference data list for acceptable values.	AA
postalCode	Text (15)	Addres sRecor d	С	Zero or One per AddressReco rd	Postal Code of the Address. Must be provided if known to the CAT Reporter. Please view the reference data list for acceptable formatting per Country.	
customerType	Array [Choice]	Natural Person Custom er Record	R	Exactly One per Natural Person Customer Record	Representation of the characteristics of the CAT Customer. All applicable values for the CAT Customer must be included in the array. Values: ACCREDITED — Customer was identified as an accredited investor by the Industry Member ADVISER — Customer is affiliated with a US registered Investment Adviser BD — Customer is a US registered Broker/Dealer CP — Customer is an officer, director, or owns 10% or more	"ACCREDITED" "ADVISER" "BD" "CP" "EMPLOYEE" "FOREIGN" "NOTAPPLICABL E" "OTHBKR" "RIC" "TRUST"

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					shares of a public company EMPLOYEE – Customer is an employee or associated person of the Industry Member FOREIGN – Customer is a Natural Person or Legal Entity that does not have a US Tax Identifier NOTAPPLICABLE – None of the defined terms are applicable to the customer. OTHBKR – Customer is affiliated with a US registered Broker other than the Industry Member RIC – Customer is a Registered Investment Company, as defined in the Investment Company Act of 1940 (15 U.S.C. § 80a–3(a)(1)) TRUST – Customer is a Trust	
updateNotification	Boolean	Natural Person Custom er Record	C	Zero or One per Natural Person Customer Record	Indicates the customer record is being reported to close a Material Inconsistency, or is being reported with known updates to key attributes including: Year of Birth. If populated as true, changes to the key attributes will not result in a Material Inconsistency.	true false
legalEntityCustomerLi st	Multi-Dimensional Array	Main	С	Zero or One per submission file	Structure for the array of Legal Entity type Customer records that are included in the file. Required if the submission file contains one or more Legal Entity customer records; not required if no	

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					Legal Entity Customer records are included in the file.	
customerRecordID	Unsigned	Legal Entity Custom er Record	R	Exactly One per Legal Entity Customer Record	A unique reference to a single Customer for a single submission file.	
legalName	Text (100)	Legal Entity Custom er Record	R	Exactly One per Legal Entity Customer Record	The Legal Name known for the Customer entity.	
customerStartDate	Date (Number) (8)	Legal Entity Custom er Record	R	Exactly One per Legal Entity Customer Record	The date on which the customer first became a customer of the CAT Reporter firm, in YYYYMMDD format.	YYYYMMDD
customerEndDate	Date (Number) (8)	Legal Entity Custom er Record	С	Zero or One per Legal Entity Customer Record	The date on which the customer ceased to be a customer of the CAT Reporter firm, in YYYYMMDD format.	YYYYMMDD
customerEndReason	Choice	Legal Entity Custom er Record	С	Zero or One per Legal Entity Customer Record	The reason why the customer ceased to be a customer of the CAT Reporter firm. Values: CORRECTION – Customer was erroneously reported ENDED – Customer ended their relationship with the firm REPLACED – Input Identifier of the Customer was updated and a new Customer was reported in place of this customer OTHER – Other unlisted reason for ending the Customer relationship	"CORRECTION" "ENDED" "REPLACED" "OTHER"
addressList	Multi-Dimensional Array	Legal Entity Custom er Record	С	Zero or One per Legal Entity Customer Record	Structure for the array of Address records that are associated to the Customer record within the file. If the addressList is included, an	

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					ADDRESS1 record must be included for the Customer record. Additional addresses may be included for the Customer if available within the CAT Reporter Firm's system.	
addrType	Choice	Addres s Record	R	Exactly One per Address Record	The type of the Address record. Values: ADDRESS1 – The first address record of the customer. ADDRESS2 – The second address record of the customer. ADDRESS3 – The third address record of the customer. ADDRESS4 – The fourth address record of the customer.	"ADDRESS1" "ADDRESS2" "ADDRESS3" "ADDRESS4"
addrLine1	Text (40)	Addres s Record	R	Exactly One per AddressReco rd	The first Address Line for the address.	
addrLine2	Text (40)	Addres sRecor d	0	Zero or One per AddressReco rd	Additional space for Address Line.	
addrLine3	Text (40)	Addres sRecor d	0	Zero or One per AddressReco rd	Additional space for Address Line. Must not be provided if addrLine2 is not provided.	
addrLine4	Text (40)	Addres sRecor d	0	Zero or One per AddressReco rd	Additional space for Address Line. Must not be provided if addrLine2 and addrLine3 are not provided.	
city	Text (100)	Addres sRecor d	R	Exactly One per AddressReco rd	City of the Address.	
regionCode	Text(40)	Addres sRecor d	С	Zero or One per AddressReco rd	Code of the local region of the Address, in ISO 3166-2 format with the two character Country Code.	AA-XX

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					Please view the reference data list for acceptable values. Must be provided if known to the CAT Reporter. Must be provided if a region list is available for the Country of the Address. Optional to provide if no region list is available for the Country of the Address.	
countryCode	Choice	Addres sRecor d	R	Exactly One per AddressReco rd	Code of the Country of the Address, in ISO 3166-1 alpha-2 format. Please view the reference data list for acceptable values.	AA
postalCode	Text (15)	Addres sRecor d	С	Zero or One per AddressReco rd	Postal Code of the Address. Must be provided if known to the CAT Reporter. Please view the reference data list for acceptable formatting per Country.	
ein	Text (10)	Legal Entity Custom er Record	С	Zero or One per Legal Entity Customer Record	The Employer Identification Number (EIN) of the customer, in 99-999999999999999999999999999999999	99-999999
customerType	Array [Choice]	Legal Entity Custom er	R	Exactly One per Legal Entity Customer Record	Representation of the characteristics of the CAT Customer. All applicable values for the CAT Customer must be included in the array. Values: ACCREDITED – Customer was identified as an accredited investor by the Industry Member ADVISER –	"ACCREDITED" "ADVISER" "BD" "CP" "EMPLOYEE" "FOREIGN" "NOTAPPLICABL E" "OTHBKR" "RIC" "TRUST"

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					Customer is affiliated with a US registered Investment Adviser BD – Customer is a US registered Broker/Dealer CP – Customer is an officer, director, or owns 10% or more shares of a public company EMPLOYEE – Customer is an employee or associated person of the Industry Member FOREIGN – Customer is a Natural Person or Legal Entity that does not have a US Tax Identifier NOTAPPLICABLE – None of the defined terms are applicable to the customer. OTHBKR – Customer is affiliated with a US registered Broker other than the Industry Member RIC – Customer is a Registered Investment Company, as defined in the Investment Company Act of 1940 (15 U.S.C. § 80a–3(a)(1)) TRUST – Customer is a Trust	
lei	Alphanumeric (20)	Legal Entity Custom er Record	С	Zero or One per Legal Entity Customer Record	The Legal Entity Identifier (LEI) of the customer. Must be provided if known to the firm. Must be included if the Input Identifier used to generate the Transformed Identifier of the customer was an LEI.	
updateNotification	Boolean	Legal Entity	С	Zero or One per Legal	Indicates the customer record is	true false

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
		Custom er Record		Entity Customer Record	being reported to close a Material Inconsistency, or is being reported with known updates to key attributes. If populated as true, changes to the key attributes will not result in a Material Inconsistency. Updates to the EIN included on a Legal Entity customer record will always result in a Material Inconsistency because if an EIN is available for the customer, the EIN is to be used to create the TID for the submission and a differing EIN must result in a different TID.	
correctionList	Multi-Dimensional Array	Main	С	Zero or One per Submission File	Structure for the array of Correction records within the file. Required if the submission file contains one or more Correction records. Must only be used for correcting rejections caused by malformed firmDesignatedID or largeTraderID values.	
rejectionID	Unsigned	Correct ion Record	R	Exactly One per Correction Record	The rejectionID from a prior submission that was created for the particular Data Ingestion error being corrected.	
correctionAction	Choice	Correct ion Record	R	Exactly One per Correction Record	The particular action that is being taken to correct for the prior rejection. Values: CORRECTION – A new entry is included in the submission file to correct for the prior rejected record using a new firmDesignatedID or	"CORRECTION" "DELETE"

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					new Customer record. DELETE – The prior rejection needs to be cleared without a new record being submitted.	
correctingFirmDesign atedID	Text (40)	Correct ion Record	С	Zero or One per Correction Record	The firmDesignatedID that is correcting for the prior rejected FDID. The correctingFirmDesig natedID must be present in the submission file, or have been accepted in a prior CAT CAIS submission. Required if the correctionAction is CORRECTION and the prior error being corrected was against an FDID.	
correctingCustomerR ecordID	Unsigned	Correct ion Record	С	Zero or One per Correction Record	The correctingCustomer RecordID that is correcting for the prior rejected customerRecordID record. The correctingCustomer RecordID must be present in the submission file. Required if the correctionAction is CORRECTION and the prior error being corrected was against a Customer.	

4.2. Transformed Identifiers File

The Transformed Identifiers File contains the list of TID values and the pointer to the tidRecordID from the CAIS Data File. A single Transformed Identifiers File is to be submitted in a pairing with a single CAIS Data File containing one or more customer records.

Table 7: Transformed Identifiers File

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/
version	Text (10)	Main	R	Exactly One per submission file	The version of the Transformed Identifiers Schema under which the data is reported. Initial version utilized will be 2.0.0	Accepted Values 2.0.0
tidRecordCount	Unsigned	Main	R	Exactly One per submission file	The count of TID attribute occurrences within the file. Used to validate the count of TID records intended to be submitted within the file matches the count of records present in the file.	
tidRecordList	Multi-Dimensional Array	Main	С	Zero or One per submission file	Structure for the array of TID Records that are included in the file. Required if the submission file contains one or more TID records; not required if no TID records are included in the file.	
customerRecordID	Unsigned	TID Record	R	Exactly One per TID Record	A unique reference to a single Customer record in the CAIS data file.	
tidType	Choice	TID Record	R	Exactly One per TID record	The specific type of Input Identifier used to generate the TID value. Values: EIN – Indicates the TID was generated using an Employer Identification Number (EIN). FOREIGN – Indicates an identifier other than an EIN, SSN, or ITIN was used to generate the TID. SSN/ITIN – Indicates the TID was generated using a Social Security Number (SSN) or Individual Taxpayer Identification	"EIN" "FOREIGN" "SSN/ITIN"

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					Number (ITIN)	
foreignTIDType	Choice	TID Record	С	Zero or One per TID Record	The type of Foreign Input Identifier used to generate a FOREIGN type TID. Required to be populated if the tidType is FOREIGN.	"LEI" "NATIONALID" "PASSPORT" "PERMANENT"
					Values: LEI – Legal Entity Identifier	
					NATIONALID – National Registration or Tax Identifier	
					PASSPORT – Country of Issuance and Passport Number	
					PERMANENT – Permanent Resident Identifier	
foreignTIDCountryCd	Choice	TID	С	Zero or One per TID Record	Code of the Country of which issued the Input Identifier used to generate the FOREIGN type Transformed Identifier, in ISO 3166-1 alpha-2 format. Please view the reference data list for acceptable values. Required to include if the tidType is FOREIGN and the foreignTIDType is not LEI.	AA
tidValue	Hexadecimal (64)	TID Record	R	Exactly One per TID Record	The obfuscated TID value created in place of the Input Identifier of the Customer Record whose data is being reported.	
replacedByTIDType	Choice	TID Record	С	Zero or One per TID Record	The type of obfuscated TID value created in place of the Input Identifier of the Customer Record that has taken the place of the reported Customer Record. Must be provided if the customerEndReason in the CAIS Data	"EIN" "FOREIGN" "SSN/ITIN"

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					file for the Customer is REPLACED. Must not be provided if the customerEndReaso n is not set or is set as any value other than REPLACED. Values: EIN – Indicates the replacedByTID was generated using an Employer Identification Number (EIN). FOREIGN – Indicates an identifier other than an EIN, SSN, or ITIN was used to generate the replacedByTID. SSN/ITIN – Indicates the replacedByTID. SSN/ITIN – Indicates the replacedByTID was generated using a Social Security Number (SSN) or Individual Taxpayer Identification Number (ITIN)	
replacingForeignTIDT ype	Choice	TID Record	C	Zero or One per TID Record	The type of Foreign Input Identifier used to generate a FOREIGN type TID that has taken the place of the reported Customer Record. Required to be populated if the replacedByTIDType is FOREIGN. Values: LEI – Legal Entity Identifier NATIONALID – National Registration or Tax Identifier PASSPORT – Country of Issuance and Passport Number PERMANENT – Permanent Resident Identifier	"LEI" "NATIONALID" "PASSPORT" "PERMANENT"
replacingForeignTIDC ountryCd	Choice	TID	С	Zero or One per TID Record	Code of the Country of which issued the Input Identifier used	AA

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					to generate the FOREIGN type Transformed Identifier that has taken the place of the reported Customer Record., in ISO 3166-1 alpha-2 format. Please view the reference data list for acceptable values. Required to include if the replacedByTIDType is FOREIGN and the replacingForeignTID Type is not LEI.	
replacedByTID	Hexadecimal (64)	TID Record	С	Zero or One per TID Record	The obfuscated TID value created in place of the SSN, ITIN, EIN, or Foreign identifier of the Customer Record that has taken the place of the reported Customer Record. Must be provided if the customerEndReaso n in the CAIS Data file for the Customer is REPLACED. Must not be provided if the customerEndReaso n is not set or is set as any value other than REPLACED.	

5. Submission Process

This section contains information pertaining to CAT CAIS account data and file formats, CAT CAIS submissions (including a general data flow overview), network and transport options, CAT CAIS access, and reporting hours.

5.1. File Submissions and Data Formats

CAT CAIS customer and account reference data submissions must include a data file with populated header record information, including Version, CAT Reporter ID, CAT Submitter ID, FDID Record Count, and Customer Record Count. It is valid and acceptable for a firm to submit a file with only this header information and record counts of zero, indicating an intentional submission of no account or customer record data. All submissions to CAIS are required to be in UTF-8 encoding.

A single submission to CAT CAIS must be comprised of a paired data file and identifiers file, even if record counts are zero for both files. The base file names for the data file and identifiers file must use identical name values, comprised of the CAT Submitter ID, CAT Reporter CRD, File Generation Date, optional Group, and File Number, to be identified as a paired data file. Data files have a prescribed naming convention and are supported in JSON format.

Transformed Identifiers data submissions must include a data file with populated header information, including Version and TID Record Count. It is valid and acceptable for a firm to submit a file with only this header information and record counts of zero, indicating an intentional submission of no TID data.

5.1.1. File Submission Names

1. Reference Data files must be named using the following format:

```
<CAT Submitter ID>_<CAT Reporter CRD>_<File Generation
Date>_[<Group>_]<File Kind>_<File Number>.<Format
Extension>.<Compression Extension>
```

For example: 123_999_20200101_CAIS_000123.json.bz2

2. Identifier files must be named using the following format:

```
<CAT Submitter ID>_<CAT Reporter CRD>_<File Generation
Date>_[<Group>_]<File Kind>_<File Number>.<Format
Extension>.<Compression Extension>
```

For example: 123_999_20200101_TIDS_000123.json.bz2

3. The values assigned within the format of a file name include:

Table 8: Elements of a File Submission Name

Field Name	Data Type	Description	Include Key
CAT Submitter ID	Unsigned	CAT Reporting Agent that submitted the file to CAT.	R
CAT Reporter CRD	Unsigned	The CRD assigned identifier of the firm to which the data within the file belongs.	R
File Generation Date	Date	The date the file was generated or reported. Used to guarantee uniqueness of a file across dates. Date must be less than or equal to System Date. Future dates are not acceptable.	R
Group	Alphanumeric (20)	Reporter defined string to guarantee uniqueness of a file across dates.	0
		Filenames associated with web submission directly entered into the CAIS Reporter Portal will be assigned the value of 'caisweb'. We recommend not using the Group value of 'caisweb' for submissions uploaded via the CAIS Reporter Portal or submitted via SFTP.	
File Kind	Alphanumeric (20)	Set to 'CAIS' for Reference Data files. Set to 'TIDS' for Identifiers files.	R
File Number	Unsigned	Sequence number of the file, 6-digits long, left-padded with zeros.	R
Format Extension	Alphanumeric (4)	Represents the format of the data submission. JSON formatted submissions must be 'json'.	R
Compression Extension	Alphanumeric (3)	Applicable to Data Files. Set to 'bz2'	R

- 4. File names should be globally unique among all other files using the base name (the portion of the file name without the format and compression extensions) of the file.
- 5. A single CAT CAIS submission must consist of a paired Data file and Identifiers file, noted by the same file name for the Data file and Identifiers file for the combination of CAT Submitter ID, CAT Reporter CRD, File Generation Date, optional Group (if present on either), and File Number attributes.

5.1.2. Submission Formats

CAT CAIS supports the submission of data in JSON format only, due to the relational nature of the account and customer data.

5.1.3. Reference Data File Submission

The following rules apply to Reference Data Files:

- The CAT CAIS Processor will support standard JSON syntax for each record or as specified in this
 document.
- 2. Data files serve as top-level containers for each object.
- All data files sent from the CAT Reporter (or the third-party CAT Reporting Agent for the CAT Reporter) must be compressed using BZip2. The associated compression extension is "bz2".
- 4. Data files must be individually compressed and submitted. Compressed files may not be bundled into a single container file.
- 5. The data contained within the data file must represent data for the CAT Reporter CRD number identified within the file name.
- 6. A Data file without an associated Identifiers file posted within 60 minutes of the data file submission will result in an error.
- 7. An Identifiers file without an associated Data file posted within 60 minutes of the Identifiers file submission will result in an error.
- 8. The CAT Submitter ID, CAT Reporter CRD, File Generation Date, optional Group, and File Number must be the same for the Reference Data file and paired Identifiers file.
- 9. The Reference Data File submission must be the same schema version as the Identifiers file.
- 10. Files submitted through SFTP are limited to a maximum uncompressed size of 100GB.
- 11. Files sizes <= 1GB are recommended as feedback will be returned faster.
- 12. Data files submitted through the CAT Reporter Portal CAIS are limited to a maximum uncompressed size of 1GB, with a record limit of 100,000 FDID records per file and 100,000 Customer records. Files with more than 100,000 FDID records and/or more than 100,000 Customer records will be rejected.
- 13. Schema files will be maintained by the Plan Processor and will be versioned as the Technical Specifications change.
- 14. Data files submitted to CAT CAIS will be treated as Delta files and updates or changes will only be enacted on records as contained within the submission file. Records previously received and not included in a later submission file will not be changed in CAT CAIS until included in a subsequent submission file.
- 15. Records included in a submission file must reflect the complete and current state of that record. This includes all pertinent associations and attributes. The new record state will replace the state of the record in CAIS if it had been previously submitted. Any associations that were previously accepted into CAIS, but are omitted in the subsequent submission of the record, will be implicitly ended; likewise, any attributes that were previously accepted but are omitted will be implicitly cleared.
- 16. Data files may contain original submissions, updates to records contained in prior submissions, firm-initiated corrections of records contained in prior submissions, and record error corrections.

- 17. Conditional and optional fields without a value will be assumed to be NULL when stored in CAIS.

 Conditional and optional fields may also be present in a submission with a 'null' value in order to be interpreted as NULL.
- 18. All customer and account data included in the submission file must be appropriate for the CAT Reporter CRD and Correspondent CRD pairing present in the file. If the data being reported is for the customers and accounts of the CAT Reporter firm itself, the Correspondent CRD must either be excluded from the file or left as NULL.

5.1.3.1. Reference Data File Submission - FDID

The following rules apply to FDID records present within Reference Data Files:

- An FDID being submitted to CAIS must have at least one associated Customer within the submission file.
- 2. Each FDID included in a submission file must contain all attributes and associations that reflect its current state.
- 3. If any Customer associated to an FDID within a submission file is rejected due to data validation errors, the FDID and all of its other Customer associations will be rejected as well.
- 4. In the scenario a Firm needs to clear a previously submitted conditional or optional field value, they must omit the field in the new submission, which will implicitly clear the value, or include it in the submission with an explicit value of 'null'. The full state of the FDID must be included as well. For example, if a Firm previously ended an FDID record for a reason other than REPLACED, and the Firm wants to resume submission of the FDID record, they would need to send a 'null' value for the fdidEndDate and fdidEndReason fields, or they can simply omit them from the submission.
- Each FDID in a submission file must include any and all applicable accountType values that are applicable for the FDID.
- 6. In the scenario a Firm ends an FDID record, by including a populated fdidEndDate and fdidEndReason attribute, but does not include some or all of the currently active LTIDs associations stored in CAIS, the omitted active LTIDs associated to the ended FDID will be ended on behalf of the Firm. The fdidEndDate and fdidEndReason will be cascaded as the ltidEndDate and ltidEndReason, respectively.
- 7. In the scenario a Firm is ending an FDID record that has currently active LTIDs associated to the ending FDID, and they do not want the date and reasons cascaded, they must explicitly end the LTID-to-FDID association by including the association in the submission file with populated ItidEndDate and ItidEndReason attributes.
- 8. Clearing previously set *fdidEndDate* and *fdidEndReason* attributes will not result in implicit reactivation of LTID nor Customer associations of the FDID.

- 9. If an LTID is associated to multiple FDID records within a single CAT Reporter Firm, the LTID-to-FDID association must be submitted for each FDID. The associations may be submitted within a single submission file or across multiple submission files as associations are established.
- 10. If an LTID becomes associated to an FDID that was previously submitted and accepted by CAT CAIS, the Firm must establish the LTID-to-FDID association by including the FDID in a submission file with all appropriate attributes and associations, and include the new LTID within the largeTraderList array of the FDID record.
- 11. In the scenario a Firm is ending an FDID record that has one or more stored LTID associations where the *ItidEndDate* is set to a date later than the *fdidEndDate* and the association is omitted from the submission, the *ItidEndDate* values stored in CAIS will be updated to the earlier *fdidEndDate* value. The *ItidEndReason* currently set on the association will not be updated if it differs from the submitted *fdidEndReason* value.
- 12. If an LTID-to-FDID association that was previously stored in CAIS is omitted from an FDID submission record, the association will be implicitly ended. The date the submission was acknowledged by CAIS will be used as the *ItidEndDate* and the *ItidEndReason* will be set to 'ENDED'. The *ItidEffectiveDate* will be unchanged in this case.
- 13. The *replacedByFDID* value included in a submission file must reference an FDID that is either included in the current submission file or was accepted by CAT CAIS in a prior submission file.
- 14. If the replacedByFDID record in a submission file was not accepted by CAT CAIS in a prior submission file and is not included in the current submission file, or is included in the current submission file but the replacing FDID record does not pass data validation checks, the submission record referencing the replacing FDID will fail data validation and not be accepted by CAT CAIS.
- 15. The correctingFirmDesignatedID value included in a submission file must reference a corresponding FDID that is either included in the current submission file or was accepted by CAT CAIS in a prior submission file.
- 16. If the FDID listed in the correctingFirmDesignatedID value in a submission file was not accepted by CAT CAIS in a prior submission file and is not included in the current submission file, or is included in the current submission file but the FDID record does not pass data validation checks, the correction submission record referencing the FDID record will fail data validation and not be accepted by CAT CAIS.
- 17. If a Customer is associated to multiple FDID records within a single CAT Reporter Firm, the Customer-to-FDID association must be submitted for each FDID. The associations may be submitted within a single submission file or across multiple submission files as associations are established.
- 18. If a Customer becomes associated to an FDID that was previously submitted and accepted by CAT CAIS, the Firm must establish the Customer-to-FDID association by including the FDID in a submission file with all attributes that apply and including the Customer role within the

- fdidCustomerList array of the FDID record. The current state of the corresponding Customer record must be included in the submission as well.
- 19. In the scenario a Firm ends an FDID record, by including a populated fdidEndDate and fdidEndReason attribute, but does not include some or all of the currently active Customer-to-FDID associations, the omitted associations to the ended FDID will be ended on behalf of the Firm. The fdidEndDate and fdidEndReason will be cascaded as the roleEndDate and roleEndReason, respectively.
- 20. In the scenario a Firm is ending an FDID record that has currently active Customer associations to the ending FDID, and they do not want the date and reasons cascaded, they must explicitly end the Customer-to-FDID association by including the association in the submission file with populated roleEndDate and roleEndReason attributes.
- 21. In the scenario a Firm is ending an FDID record that has one or more stored Customer-to-FDID associations where the *roleEndDate* is set to a date later than the *fdidEndDate* and the association is omitted from the submission, the *roleEndDate* values stored in CAIS will be updated to the earlier *fdidEndDate* value. The *roleEndReason* currently set on the association will not be updated if it differs from the submitted *fdidEndReason* value.
- 22. If a Customer-to-FDID association is omitted from an FDID submission record that was previously stored in CAIS, the association will be implicitly ended. The date the submission was received by CAIS will be used as the *roleEndDate* and the *roleEndReason* will be set to 'ENDED'. The *roleStartDate* will be unchanged in this case.
- 23. Each FDID record within a submission file must contain at least one Address Record, and may contain up to four total Address Records. When multiple Address Records are included in the file, they must use the address type values corresponding to the counts of addresses in the file. For example, if two Address Records are included, they must be ADDRESS1 and ADDRESS2.
- 24. The FDID submission must contain all current Address Records for the FDID record. If a previously stored Address Record is not included in a subsequent submission of the FDID, the Address Record(s) that is not received will no longer be stored as an Address of the FDID.
- 25. Each FDID record within a submission file must contain a populated value for either the *primeBrokerID* or *bankDepositoryID* attributes, but the FDID record must not have both attributes populated with a value. The *primeBrokerID* attribute is to be used if the customer of the account is a broker/dealer, while the *bankDepositoryID* attribute is to be used if the custodian is **not** a broker/dealer.
- 26. The FDID submission must include any and all *registeredRepCRD* values for current Registered Representatives of the FDID. If a specific CRD that was previously stored for an FDID is not included in a subsequent submission of the FDID, the CRD that is no longer received will no longer be stored in association with the FDID.

- 27. Each Customer of an FDID must only ever have one active *role* in association to the FDID at a time. If a Customer changes their *role* for example, a Holder of the account that does not have authorization to trade on the account is granted authorization to trade the original *role* must be ended. Ending the association and adding the new association may occur within a single submission.
- 28. No validation will occur for LTID Dates (*ItidEffectiveDate* and *ItidEndDate*) compared to the associated FDID Dates (*fdidDate* and *fdidEndDate*). However the *ItidEffectiveDate* included in a submission must still be set to a value earlier than the *ItidEndDate* when *ItidEndDate* is populated.

5.1.3.2. Reference Data File Submission - Customer

The following rules apply to Customer records present within Reference Data Files:

- Each Customer record present in the Reference Data file must have a corresponding entry in the Identifiers file. If a corresponding Identifiers file entry is not present, the Customer Record will be rejected.
- A Customer being submitted to CAIS must have at least one associated FDID within the submission file.
- 3. Each Customer included in a submission file must contain all attributes and associations that reflect its current state.
- 4. If any FDID associated to a Customer within a submission file is rejected due to data validation errors, the Customer will be rejected as well.
- 5. In the scenario a Firm needs to clear a previously submitted conditional or optional field value, they must omit the field in the new submission, which will implicitly clear the value, or include it in the submission with an explicit value of 'null'. The full state of the Customer should be included as well. For example, if a Firm previously ended a Customer record, and the Firm wants to resume submission of the Customer record, they would need to send a 'null' value for the customerEndDate and customerEndReason fields, or they can simply omit them from the submission.
- 6. Clearing previously set *customerEndDate* and *customerEndReason* attributes will not result in implicit reactivation of any FDID associations of the Customer.
- 7. If the Customer listed in the *correctingCustomerRecordID* is not included in the current submission file, or is included in the current submission file but the Customer record does not pass data validation checks, the correction submission record referencing the Customer record will fail data validation and not be accepted by CAT CAIS.
- 8. If a Customer becomes associated to an FDID that was previously submitted and accepted by CAT CAIS, the Firm must establish the Customer-to-FDID association by including the FDID in a submission file with all relevant attributes, and including the Customer role within the fdidCustomerList array of the FDID record.

- 9. In the scenario a Firm ends a Customer record, by including a populated customerEndDate and customerEndReason attributes, but active associations to other FDIDs are stored in CAIS for that Customer and the other FDIDs are not included in the submission file, the Customer record and included FDID will be rejected.
- 10. Each Customer record within a submission file may contain up to four Address Records. It is acceptable to include a Customer record in a submission file without any Address Records. When multiple Address Records are included in the file, they must use the address type values corresponding to the counts of addresses in the file. For example, if two Address Records are included, they must be ADDRESS1 and ADDRESS2.
- 11. The Customer submission must contain all current Address Records for the Customer record. If a previously stored Address Record is not included in a subsequent submission of the Customer, the Address Record(s) that is not received will no longer be stored as an Address of the Customer.
- 12. In the event a single customer is included with multiple versions of data in a single submission file, the CAT Reporter firm must ensure the following attributes are consistent across all versions customer record type for a FOREIGN tidType record (i.e., reporting only as a Natural Person or a Legal Entity), customerStartDate, customerEndDate, customerEndReason, yearOfBirth, and ein. Failure to maintain consistent data on these attributes will result in the rejection of all instances of the customer record.
- 13. Each Customer in a submission file must include any and all applicable customerType values that are applicable for the Customer. In the event that none of the defined terms are applicable for the Customer, the value of NOTAPPLICABLE is to be used.

5.1.4. Identifiers Data File Submission

The following rules apply to the Identifier Files and the records present within the file:

- 1. Schema files will be maintained by the Plan Processor and will be versioned as the Technical Specifications change.
- 2. A single TID may be present within the Transformed Identifiers file in association with differing *customerRecordID* values.
- 3. Each TID record present in the Identifiers file must reference a record present in the Data file. If a corresponding record is not present in the Data file either in the naturalPersonCustomerList or the legalEntityCustomerList, the individual TID entry in the Identifiers file will be rejected and not processed for additional validations.
- A TID record must be created from an appropriately formatted Input Identifier for SSN/ITIN and EIN inputs – that is, SSN/ITIN values formatted as '999-99-9999' or EIN values formatted as '99-9999999'.

- 5. Format validation will not occur for FOREIGN identifier types.
- 6. A TID record must be created from a valid Input Identifier, as noted

a. For SSN/ITIN

- i. No values having an Area Number (first three digits) of 000 nor 666.
- ii. No values having a Group Number (middle two digits) of 00.
- iii. No values having a Serial Number (last four digits) of 0000.
- iv. No values of 111-11-1111, 333-33-3333, 666-66-6666, nor 123-45-6789.

b. For EIN

- Must have a valid prefix (first two digits), as noted by the Internal Revenue Service.
- 7. Associating an SSN/ITIN with a Customer in the *legalEntityCustomerList* or an EIN with a Customer in the *naturalPersonCustomerList* will result in a rejection of the Customer record.
- 8. A TID generated from an invalid Input Identifier, or submitted with an incorrect *tidType* value, will cause the Customer record to be rejected.

5.1.5. Paired CAIS Data and Transformed Identifiers File JSON Example

The following JSON example demonstrates how a Firm would structure a reference data file submission.

```
"version": "2.0.0",
"catReporterCRD": 123456,
"catSubmitterID": 99999,
"correspondentCRD": 3210,
"fdidRecordCount": 3,
"naturalPersonCustomerRecordCount": 3,
"legalEntityCustomerRecordCount": 1,
"fdidRecordList": [
    "fdidRecordID": 1,
    "firmDesignatedID": "EZAccount123",
    "fdidType": "ACCOUNT",
    "accountType": ["DVP/RVP", "MARGIN"],
    "accountName": "JointMgdAcct",
    "primeBrokerID": ["BRK1", "BRK2"],
    "branchOfficeCRD": 13245,
    "registeredRepCRD": [123],
    "fdidDate": 20190101,
    "addressList": [
        "addrType": "ADDRESS1",
        "addrLine1": "1 WATERS ST",
        "addrLine2": "TRADING DESK 15",
        "city": "JERSEY CITY",
        "regionCode": "US-NJ",
        "countryCode": "US",
        "postalCode": "07097"
```

```
"addrType": "ADDRESS2",
      "addrLine1": "1313 MOCKINGBIRD LANE",
      "city": "CAMELOT",
      "regionCode": "US-NJ",
      "countryCode": "US",
      "postalCode": "08854"
    }
  "largeTraderList": [
      "largeTraderRecordID": 1,
      "largeTraderID": "12345678-0001",
      "ltidEffectiveDate": 20190501
    },
      "largeTraderRecordID": 2,
      "largeTraderID": "98765432-1234",
      "ltidEffectiveDate": 20180501
  ],
  "fdidCustomerList": [
      "customerRecordID": 1,
      "role": "TRDHOLDER",
      "roleStartDate": 20200401
    },
      "customerRecordID": 4,
      "role": "NTHOLDER",
      "roleStartDate": 20200401
    },
      "customerRecordID": 15,
      "role": "AUTHREP",
      "roleStartDate": 20200401
  1
},
  "fdidRecordID": 2,
  "firmDesignatedID": "MyTestEntity",
  "fdidType": "ENTITYID",
  "accountType": ["OTHER", "DVP/RVP"],
  "accountName": "AllAcctTest",
  "clearingBrokerID": ["A349"],
  "branchOfficeCRD": 13245,
  "fdidEndDate": 20191201,
  "fdidDate": 20170308,
  "fdidEndReason": "ENDED",
  "addressList": [
      "addrType": "PRIMARY",
      "addrLine1": "1604 RIVERSIDE DRIVE",
      "city": "HILL VALLEY",
      "regionCode": "US-CA",
```

```
"countryCode": "US",
      "postalCode": "91361"
 ]
},
 "fdidRecordID": 3,
 "firmDesignatedID": "InternalRel",
  "fdidType": "RELATIONSHIP",
 "accountType": ["FIRM", "MARKET"],
 "bankDepositoryID": ["DEP11"],
 "accountName": "Relationship Market Maker Acct",
 "branchOfficeCRD": 13245,
  "registeredRepCRD": [123, 456],
  "fdidDate": 20150121,
  "addressList": [
      "addrType": "ADDRESS1",
      "addrLine1": "84 BEACON ST",
      "city": "BOSTON",
     "regionCode": "US-MA",
      "countryCode": "US",
      "postalCode": "02101"
    },
      "addrType": "ADDRESS2",
      "addrLine1": "400 PRIVATE DRIVE",
      "city": "LITTLE WHINGING",
      "regionCode": "GB-SRY",
      "countryCode": "GB",
      "postalCode": "A9A 9A9"
    },
      "addrType": "ADDRESS3",
      "addrLine1": "84 BEACON ST",
      "city": "BOSTON",
      "regionCode": "US-MA",
      "countryCode": "US",
      "postalCode": "07097"
 ],
  "largeTraderList": [
      "largeTraderRecordID": 1,
      "largeTraderID": "98765432-1234",
      "ltidEffectiveDate": 20180501
    },
      "largeTraderRecordID": 2,
      "largeTraderID": "11223344-0001",
      "ltidEffectiveDate": 20180901
    },
      "largeTraderRecordID": 3,
      "largeTraderID": "99887766-6543",
      "ltidEffectiveDate": 20200105
```

```
}
      ],
      "fdidCustomerList": [
        {
          "customerRecordID": 2,
          "role": "AUTH3RD",
          "roleStartDate": 20150121
        } ,
          "customerRecordID": 15,
          "role": "AUTHREP",
          "roleStartDate": 20200401
      1
    }
 ],
"naturalPersonCustomerList": [
      "customerRecordID": 1,
      "firstName": "JOHN",
      "lastName": "DOE",
      "nameSuffix": "SENIOR",
      "yearOfBirth": "1980",
      "customerStartDate": "20160501",
      "addressList": [
          "addrType": "ADDRESS1",
          "addrLine1": "123 MAIN ST",
          "city": "NEW YORK",
          "regionCode": "US-NY",
          "countryCode": "US",
          "postalCode": "10011"
        }
      ],
      "customerType": ["ACCREDITED"]
    },
      "customerRecordID": 4,
      "firstName": "JANE",
      "lastName": "DOE",
      "yearOfBirth": "1982",
      "customerStartDate": "20200301",
      "customerType": ["ACCREDITED", "FOREIGN"],
      "updateNotification": true
    } ,
      "customerRecordID": 15,
      "firstName": "ALEXANDER",
      "middleName": "W",
      "lastName": "SMYTHE",
      "yearOfBirth": "1975",
      "crdNumber": 123,
      "customerStartDate": "20080915",
      "customerType": ["EMPLOYEE"]
```

```
"legalEntityCustomerList": [
      "customerRecordID": 2,
      "legalName": "PRIMARY TRADING",
      "customerStartDate": "20100101",
      "addressList": [
          "addrType": "ADDRESS1",
          "addrLine1": "1 WATERS ST",
          "addrLine2": "TRADING DESK 15",
          "city": "JERSEY CITY",
          "regionCode": "US-NJ",
          "countryCode": "US",
          "postalCode": "07097"
      ],
      "customerType": ["BD"]
    }
 ],
 "correctionList": [
      "rejectionID": 1127,
      "correctionAction": "CORRECTION",
      "correctingFirmDesignatedID": "EZAccount123"
   },
      "rejectionID": 821,
      "correctionAction": "DELETE"
 ]
}
```

The following JSON example demonstrates how a Firm would structure the companion identifier file submission.

```
"version": "2.0.0",
 "tidRecordCount": 4,
  "tidRecordList": [
      "customerRecordID": 1,
      "tidType": "SSN/ITIN",
      "tidValue":
"01a54629efb952287e554eb23ef69c52097a75aecc0e3a93ca0855ab6d7a31a0"
   } ,
      "customerRecordID": 2,
     "tidType": "FOREIGN",
      "foreignTIDType": "PASSPORT",
      "foreignTIDCountryCd": "GB",
      "tidValue":
"26f917bb38d0309e438e57e06a241473ed7a59bae503712dee9c5cff3ecb50e7"
    },
    {
```

```
"customerRecordID": 4,
    "tidType": "SSN/ITIN",
    "tidValue":
"4628ea314743d5ac373997763be3d39b86fc40c5d2015d2db345b0231e215b6c"
    },
    {
        "customerRecordID": 15,
        "tidType": "EIN",
        "tidValue":
"ac7dd472ecaede73cb8dce1d9a68b7e2e33f87d9baee6ac6157bb8044365129e"
     }
    ]
}
```

5.1.6. Schema

An Industry Member Schema file that details the structure and expected contents of every CAIS file submission is available on the CAT public website. The schema file will be maintained by the Plan Processor and will be versioned as the account and customer file formats change. The CAT CAIS schema file will use the JSON schema format as defined at https://json-schema.org/.

5.1.6.1. Schema Version

Schema changes will be updated when changes to the CAT Reporting Technical Specifications for Industry Members occur that impact the schema. The following rules apply:

- 1. The Schema Version is formatted as <Major>.<Minor>.<Patch>. All digits must be represented.
 - Major updated when a change occurs that impacts all or a significant portion of Industry
 Member CAT Reporters. In such cases, the schema is not be backward compatible and will
 be specified accordingly.
 - Minor updated when a change occurs that does not require coding changes for all Industry Member CAT Reporters. In such cases, the schema is backward compatible with support for previous version(s) as specified.
 - Patch updated when a change occurs that does not require coding changes for any Industry Member CAT Reporters.
- 2. Records contained in a Data File must be formatted as per the Schema Version noted in the submission file.
- 3. Feedback provided by CAT CAIS will set the *feedbackVersion* equal to the applicable Schema Version for the submission file.

5.1.6.2. Schema Definition

The schema file is a JSON format file that represents the following:

- 1. **Data Types** CAT defined data types containing the following elements:
 - dataType: Data Type (E.g. Text) as defined in <u>Table 4: Data Types</u>
 - **JSONDataType**: JSON standard data type to be used to submit data of this type.
 - maxLength: Maximum length of the string submission. Applicable to text and alphanumeric types only.
- 2. **Choices** For choice data types, the list of possible values.
- 3. Name/Value Pairs Field specifications for Name/Value Pair fields.
 - name: Field Name.
 - dataType: Data Type or an array of Data Types.
 - **JSONDataType**: The JSON standard data type or an array or JSON standard data types.
 - required: Indicates whether the field is "Required," "Conditional," or "Optional."

5.2. Connectivity

Connectivity to CAT will be through at least one of the following methods:

- Private Line provided by a Managed Network Service Provider (MNSP)
- AWS PrivateLink³
- CAT Secure Reporting Gateway (SRG) Reporter Portal

Both the Private Line and AWS PrivateLink connectivity methods will support the CAT File Transfer service, which provides access for automated, machine-to-machine file submissions, acknowledgements, rejections, and corrections using the Secure File Transfer Protocol (SFTP) service as well as to the CAT Reporter Portal for interactive reporting through web-based forms or manual file uploads.

The CAT Secure Reporting Gateway (SRG) connectivity method will only support the CAT Report Portal. The SRG requires multi-factor authentication (MFA) to establish a secure, encrypted session before accessing the CAT Reporter Portal. The SRG requires the use of modern browsers supporting HTML5 and TLS (Transport Layer Security). No client software installation is required.

The combinations of Connectivity and Interface Methods are summarized below.

Version 2.0 r2 61

_

³ Industry Members and CAT Reporting Agents interested in AWS PrivateLink should contact the FINRA Help Desk at 888-696-3348 or at help@finracat.com.

Table 9: Connectivity Methods and Supported CAT Interfaces Methods

Connectivity Methods	Interface Methods		
	CAT File Transfer	CAT Reporter Portal - CAIS	
Private Line provided by MNSP	Y	Y	
AWS PrivateLink	Y	Y	
CAT Secure Reporting Gateway (SRG)	N	Y	

For a detailed description of the CAT Connectivity Methods, including instructions for establishing access and connectivity to the CAT system, refer to the <u>FINRA CAT Connectivity Supplement for Industry Members</u>.

5.3. CAT Interface Methods

The interface methods available to Industry Members and CAT Reporting Agents to submit data and retrieve reporting feedback include CAT File Transfer and the CAT Reporter Portal. For a detailed description of the CAT Interface Methods, including instructions for establishing access and connectivity to the CAT system, refer to the <u>FINRA CAT Connectivity Supplement for Industry Members</u>.

The following identifies the types of CAT information with the respective interface methods available for each:

Table 10: CAT Data and Feedback Interface Methods

CAT Data Submission and Feedback	Category	CAIS SFTP	CAT Reporter Portal – CAIS	CAT Reporter Portal
Submission of CAT CAIS files	Submission	✓	✓	
Resubmission of Rejected Files/Records, Corrections and Update Notifications	Submission	✓	~	
Interactive CAT Reportable Account Entry	Submission		✓	
Interactive CAT Reportable Customer Entry	Submission		✓	
File Status Retrieval	Feedback	✓	✓	
Reporting Statistics	Feedback		✓	
Error Feedback	Feedback	✓	✓	
Data Inconsistencies Feedback	Feedback	✓	✓	
CAIS System Status and Announcements	Feedback		✓	
FDID Reconciliation Report	Feedback		✓	
Account Maintenance	Administration			✓

CAT Data Submission and Feedback	Category	CAIS SFTP	CAT Reporter Portal – CAIS	CAT Reporter Portal
Establishment of Reporting Relationships	Administration			✓

5.3.1. CAT File Transfer

The CAT File Transfer method is an automated, machine-to-machine interface utilizing the Secure File Transfer Protocol ("SFTP") for file submissions, acknowledgements, rejections and corrections. SFTP enables Industry Members and CAT Reporting Agents to create machine-to-machine connections to securely transmit data and retrieve data from FINRA CAT. In order to ensure customer and account reference data is never commingled with the TID value, the two file types must be posted to separate SFTP sites.

There are two separate host sites that are utilized for CAIS data reporting to ensure the separation of the customer and account data submissions from the identifiers file. This additional physical separation for file posting further increases the security of the data within the identifiers file, and the separate directory structure reduces risks of files being cross-posted to the incorrect directory.

The following is the SFTP directory structure that will be made available in the submitter's home directory for posting customer and account reference data, and received feedback and inconsistencies files. Files associated with reference data submissions, associated feedback, and identified data inconsistencies will be uploaded in SFTP directories as per the following table.

Table 11: SFTP Directories - CAIS Data, Feedback, and Inconsistencies

Reference Data SFTP Directory	Usage
/submitterID/cat/cais/upload	SFTP submissions uploaded by Submitters including Reference Data files. CAT will move files from this directory for further processing.
/submitterID/cat/cais/feedback	Feedback files associated with data submission file processing.
/submitterID/cat/cais/inconsistencies	Feedback files containing inconsistencies identified during daily CAT CAIS data scanning.

The following is the SFTP directory structure that will be made available on the separate host site for posting the Transformed Identifiers file, and received feedback files.

Table 12: SFTP Directory - Transformed Identifiers file

Identifiers Data SFTP Directory	Usage
/submitterID/cat/tid/upload	SFTP submissions uploaded by Submitters including Identifiers files. CAT will move files from this directory for further processing.
/submitterID/cat/tid/feedback	Feedback files associated with identifier submission file processing.

The following rules apply:

- 1. Processing is initiated when a file appears in the /submitterID/cat/cais/upload directory paired with a corresponding file in the /submitterID/cat/tid/upload directory only.
- 2. Files posted to /submitterID/cat/cais/upload without a corresponding file submission posted to /submitterID/cat/tid/upload will be rejected one hour after posting.
- 3. Files posted to /submitterID/cat/tid/upload without a corresponding file submission posted to /submitterID/cat/cais/upload will be rejected one hour after posting.
- 4. CAT will remove files from the upload directory as soon as each file upload is complete.
- 5. The Submitter must not delete files from the /submitterID/cat/cais/upload directory.
- 6. Due to the PII considerations of the account and customer data, a copy of uploaded files will not be made available to the Reporter or Submitter after submission.
- 7. Firms using SFTP will be able to obtain Feedback Files for files submitted through the SFTP, as well as any files submitted through the CAT Reporter Portal CAIS through either file upload or manual submission.

5.3.2. CAT Reporter Portal - CAIS

The CAT Reporter Portal – CAIS is a web interface utilizing secure encryption protocols (HTTPS/TLS) and multifactor authentication (MFA). The CAT Reporter Portal - CAIS will facilitate data submissions using the following methods:

- Manual data file uploads for files up to 1GB in size and limited to 100,000 FDID and 100,000
 Customer records meeting all requirements of data files as specified in 5.1.3.
- Data entry for original submissions, repairs for CAT identified errors, and firm initiated corrections
 and deletion instructions. These entries will be converted to submission files generated by the
 portal. Because these files will contain PII data, they will not be available to download after
 submission.
- The CAT Reporter Portal CAIS will include a summary view screen for records created through manual submission that contains the record data which will be submitted, allowing users to confirm, and capture for their records, the details of their submission.
- Firms using the CAT Reporter Portal CAIS will not be able to view the full details of the originally submitted record for correction of CAT identified errors for data security. The CAT Reporter Portal CAIS will only display the following attributes regarding the error record, and will require entry of all other data attributes to be included in the submission:
 - catReporterCRD
 - catSubmitterID

- firmDesignatedID
- fdidRecordID
- customerRecordID (if error is against a Customer record or an FDID-to-Customer association)
- largeTraderRecordID (if error is against a Large Trader record)
- rejectionID
- errorCodeID
- Firms using the CAT Reporter Portal CAIS will only be able to view Feedback Files for files submitted through the CAT Reporter Portal - CAIS. They will not be able to view Feedback Files for files posted via SFTP.

5.4. CAT CAIS Reporting Hours

5.4.1. Submission of CAT Account and Customer Data

The CAT NMS Plan requires Industry Members to report Received Industry Member Data, which includes customer and account data, by 8:00 a.m. Eastern Time on the CAT Trading Day following the day the Industry Member receives such Received Industry Member Data. Customer and Account data may be bulk uploaded at the end of the CAT Trading Day, or may be submitted in batches with associated uploads throughout the day. All creation of, or modifications to, CAT reportable customers and accounts are required to be submitted to CAT CAIS by 8:00 a.m. Eastern Time on the CAT Trading Day following the day such information was received by the Industry Member.

Weekends or any day that all equities or options national securities exchanges are closed are not considered a CAT Trading Day.

5.4.2. Deadline of Repair for Errors Identified by CAT CAIS

For data submitted by 8:00 a.m. ET, errors will be identified by CAT CAIS and provided to Industry Members by no later than 5:00 p.m. ET on the CAT Trading Day such information was submitted to CAT. Once available, repairs can be made immediately. All repairs must be submitted by 5:00 p.m. Eastern Time on the third Trading Day after the customer or account information became available to the Industry Member. Repairs received after the repair deadline will be accepted but considered late.

CAT specifications allow for Industry Members to correct customer and account submissions that did not produce an error during processing at any time after original submission. Firm-initiated corrections will be handled in the same method as any other update to the existing customer or account record.

5.4.3. Deadline of Repair of Data Inconsistencies or Confirmation of Data Accuracy Identified by CAT CAIS

For data submitted by 8:00 a.m. ET, data inconsistencies present within the submission file will be identified by CAT CAIS and provided to Industry Members by no later than 5:00 p.m. ET on the CAT Trading Day such information was submitted to CAT. Once available, data repairs or confirmations can be made immediately. All repairs or confirmations must be submitted by 5:00 p.m. Eastern Time on the third CAT Trading Day after the customer or account information became available to the Industry Member. Repairs or confirmations received after the repair deadline will be accepted but considered late.

CAT CAIS will also conduct cross CAT Reporter inconsistency scanning across all records previously submitted by the firms on a daily basis. Data inconsistencies identified against prior submissions will be identified by CAT CAIS and provided first to the Industry Member whose data submission caused the inconsistency. All repairs or confirmations must be submitted by 5:00 p.m. Eastern Time on the third CAT Trading Day after the inconsistency was identified. If the Industry Member confirms their current data submission is correct, or submits an update to their data that leaves data inconsistent for the Customer record, all other CAT Reporter Firms who have an active version of the same Customer record with the inconsistency will then be notified of the Material Inconsistency. All repairs or confirmations must be submitted by 5:00 p.m. Eastern Time on the third CAT Trading Day after the inconsistency was reported to the Industry Member.

5.5. Security

5.5.1. Encryption (In-transit)

TLS-based encryption, version 1.2 minimum, is required for connection to the Reporter Portal (whether accessed via private line or the SRG) and to the Security Reporter Gateway itself.

For SFTP, in addition to the fact that the SFTP service is only accessible via private line, traffic will be encrypted by virtue of the intrinsic encryption capabilities of SFTP. AES256 will be supported for SFTP; support for other encryption protocols is under evaluation.

5.5.2. Encryption (At-rest)

The CAT CAIS system will use native AWS encryption features to encrypt data upon receipt. No action is required by the Industry Member.

5.5.3. Authentication

Two-factor authentication will be required for access to the CAIS Reporter Portal. The first factor will be username and password which will require periodic rotation.

The second factor will to be via push notification to an off-the-shelf application installed on a mobile device provided by the user. The user will be required to install the application to their mobile device through their mobile operating system's application store and then complete a registration process on the Reporter Portal or SRG. There is no cost to the Reporter or the user for this mobile application.

The SFTP service similarly requires that two conditions be met to access the interface. The first factor is authentication via username and password. The second is the use of a defined IP source address that is established during initial onboarding. The SFTP system implements an IP whitelist that prevents access from any system not on the whitelist.

More detailed information related to Security is described in the <u>FINRA CAT Connectivity Supplement for Industry Members</u> available at https://www.catnmsplan.com/registration/.

6. Feedback and Corrections

CAT provides feedback associated with CAT CAIS submissions for CAT Reporters and Submitters as follows:

- File Status: available via SFTP and the CAT Reporter Portal CAIS, indicates the acceptance or associated errors with a submission file.
- Reporting Statistics: available via the CAT Reporter Portal CAIS, daily summary statistics
 representing reporting activity and errors for prior submissions. Error Rate is also included.
- Error Feedback: available via SFTP and the CAT Reporter Portal CAIS, errors found during
 processing will be made available, including error code, affected FDID, and associated record
 ID(s) from the submission file.
- Corrections Feedback: available via the CAT Reporter Portal CAIS, information is provided for the repair status of all corrections. When an error has been corrected, the updated status will be reflected.
- Inconsistency Feedback Submissions: available via SFTP and the CAT Reporter Portal CAIS, inconsistencies found during processing will be made available, including inconsistency
 code, affected record, and associated record ID(s) from the submission file.
- Inconsistency Feedback Scans: available via SFTP and the CAT Reporter Portal CAIS, inconsistencies found in comparing accepted versions of the same Customer from multiple Reporters will be made available, including inconsistency code, details about the submission file that last contained the Customer record, and associated record ID(s) from the submission file.
- System Status and Announcements: available via the CAT Reporter Portal CAIS, the status
 of CAT processing will be made available with a distinction for instances when a processing delay
 or issue is occurring. Additionally, announcements related to system maintenance and upcoming
 changes will be presented.

This section describes the procedures for obtaining feedback and making corrections/deletions associated with feedback of errors. Additionally this section describes the requirement for making correction/deletions for accepted data for which there was no feedback.

6.1. File and Error Feedback

A feedback file will be made available for each submission file that is acknowledged as uploaded. This file will contain information about current status, as well as previously completed steps in the ingestion process. Feedback related to the following processing steps is expected to be made available within the following timelines:

Table 13: Feedback and Error Correction Availability

Seq	Processing Stage	Feedback	Anticipated Delivery	Delivery No Later Than
1	File Acknowledgement	File Acknowledgement Status	Within 10 minutes of File Submission	1 hour of File Submission
2	File Integrity	File Integrity Error Status or File Integrity Passed Status	Within 30 minutes of File Submission	2 hours of File Submission
3	Data Validation	Data Errors including syntax and semantic errors	Within 1 hour of File Integrity Feedback	4 hours of File Integrity Feedback
4	Inconsistencies – Submission	Customer Data Inconsistencies	Within 1 hour of Data Validation	6 hours of File Integrity Feedback
5	Inconsistencies – Scan Results	Inconsistency Scan Results	Nightly	Nightly

6.1.1. Feedback Generation

Feedback associated with all processing stages will be made available via SFTP and/or the CAT Reporter Portal - CAIS as described in Table 10: CAT Data and Feedback Interface Methods. A series of feedback files will be generated for each file submission as the file progresses through each stage of processing. The file names will have the same base portion, but with differing version values.

For Feedback files made available via SFTP, the following rules apply:

- 1. The format of feedback files will be JSON.
- 2. Feedback files for data submissions will be accessible under the <code>cat/cais/feedback</code> directory in the Submitter's home directory on the Feedback SFTP server.
- 3. Feedback files for identifier submissions will be accessible under the cat/tid/feedback directory in the Submitter's home directory on the Feedback SFTP server.
- 4. In addition to the feedback posted to the Submitter's home directories, the feedback for data submitted by a CAT Submitter on behalf of a CAT Reporter will be accessible under the CAT Reporter's home directory on the Feedback SFTP server after the file has passed file integrity checks if the CAT Reporter has an SFTP account.
- 5. If a file is rejected for a file integrity error, it will not proceed to the next processing stage.
- 6. The minimum retention time for feedback files on the SFTP server is 10 calendar days. After that time, they may be removed from the server. Feedback will be available via the CAT Reporter Portal CAIS for 10 calendar days. Metadata regarding the submission will be available via the CAT Reporter Portal CAIS for at least 90 days.

6.1.2. Feedback File Names and Format

1. Feedback Files created by CAT CAIS will be named using the following format:

```
<original File Base Name>.<version>.feedback.<Format
Extension>.<Compression type>
```

Example: SUBID_MYID_20200101_CAIS_000123.v1.feedback.json.bz2

Example: SUBID_MYID_20200101_TID_000123.v1.feedback.json.bz2

Example: SUBID_MYID_20200101_INCONSISTENCIES_000123.v1.feedback.json.bz2

- 2. If a single Firm submits multiple files having the same original File Base Name, a file version will be appended to the Original File Base name separate from the version attribute of the feedback file name so that the feedback file for each version submitted can be retained.
- 3. Separate feedback files will be provided for the data and identifiers files, as well as for inconsistencies resulting from data within the submission.

Table 14: Elements of a Data Feedback file

Field Name	Data Type	JSON Object	Includ e Key	Description
version	Text(10)	Main	R	The schema version of the feedback file used for providing the response.
submissionID	Unsigned	Main	R	The unique Submission ID assigned to the paired data and identifier submission files by the CAT CAIS system. Used to identify the single submission activity. If the same file name is submitted across multiple submissions, each submission instance will have a separate and unique Submission ID value.
submitterUsername	Text (200)	Main	R	The name associated to the CAT User ID of the account used to submit the file to CAT CAIS.
catSubmitterID	Unsigned	Main	R	The unique identifier assigned to the Submitter firm by CAT.
catReporterCRD	Unisgned	Main	R	The unique CRD identifier assigned to the CAT Reporter to whom the data belongs.
correspondentCRD	Unisgned	Main	С	The unique CRD identifier assigned to the related Introducing Broker or Correspondent firm. Only present when correspondentCRD is populated in the submission file.
submissionStatus	Choice	Main	R	The current status of the submission file in the processing flow. VALUES:
				FILE_ACKNOWLEDGED – indicates the file was acknowledged as having

Field Name	Data Type	JSON Object	Includ e Key	Description
		Object		been submitted, and has picked up for file integrity checks. • FILE_INTEGRITY_PASSED – indicates the file passed file integrity checks, and will now be processed through record data validations. • RECORD_SCAN_COMPLETED – indicates the file has completed record validations. If one or more records passed record validation, they will now be loaded to CAIS. Details about any rejected records are now available within the feedback file in the RejectionItems section. • COMPLETED_WITHOUT_REJECTION S – indicates the file has completed loading into the CAIS, and no data validation errors were encountered. No further updates will be made to the feedback file. • COMPLETED_WITH_REJECTIONS – indicates the file has completed loading into the CAIS, and one or more data validation errors were encountered. No further updates will be made to the feedback file. • COMPLETED_INTEGRITY_ERROR – indicates the file failed file integrity checks and cannot be processed. No further updates will be made to the feedback file upon reaching this status.
receiptTimestamp	Timestamp (String)	Main	R	The time at which the file was acknowledged to have been submitted for processing.
completedTimestamp	Timestamp (String)	Main	С	The time at which the file completed processing, reaching a completed status. Only populated after the file has reached a final status.
receivedFDIDRecordCount	Unsigned	Main	С	Total count of FDID Records present within the file. Only populated when the file has reached the interim status of RECORD_SCAN_COMPLETED or a final status of COMPLETED_WITHOUT_REJECTIONS or COMPLETED_WITH_REJECTIONS.
successfulFDIDRecordCount	Unsigned	Main	С	Total count of FDID Records processed without record validation errors. Only populated when the file has reached the interim status of RECORD_SCAN_COMPLETED or a final status of COMPLETED_WITHOUT_REJECTIONS or COMPLETED_WITH_REJECTIONS.
receivedNaturalRecordCount	Unsigned	Main	С	Total count of Natural Person Customer Records present within the file. Only populated when the file has reached the interim status of RECORD_SCAN_COMPLETED or a final status of COMPLETED_WITHOUT_REJECTIONS or COMPLETED_WITH_REJECTIONS.

Field Name	Data Type	JSON Object	Includ e Key	Description
successfulNaturalRecordCou nt	Unsigned	Main	С	Total count of Natural Person Customer Records processed without record validation errors. Only populated when the file has reached the interim status of RECORD_SCAN_COMPLETED or a final status of COMPLETED_WITHOUT_REJECTIONS or COMPLETED_WITH_REJECTIONS.
receivedLegalEntityRecordCo unt	Unsigned	Main	С	Total count of Legal Entity Customer Records present within the file. Only populated when the file has reached the interim status of RECORD_SCAN_COMPLETED or a final status of COMPLETED_WITHOUT_REJECTIONS or COMPLETED_WITH_REJECTIONS.
successfulLegalEntityRecord Count	Unsigned	Main	С	Total count of Legal Entity Customer Records processed without record validation errors. Only populated when the file has reached the interim status of RECORD_SCAN_COMPLETED or a final status of COMPLETED_WITHOUT_REJECTIONS or COMPLETED_WITH_REJECTIONS.
receivedCorrectionActionCount	Unsigned	Main	С	Total count of Correction Action records present within the file. Only populated when the file has reached the interim status of RECORD_SCAN_COMPLETED or a final status of COMPLETED_WITHOUT_REJECTIONS or COMPLETED_WITH_REJECTIONS.
successfulCorrectionActionC ount	Unsigned	Main	С	Total count of Correction Action records processed without record validation warnings. Only populated when the file has reached the interim status of RECORD_SCAN_COMPLETED or a final status of COMPLETED_WITHOUT_REJECTIONS or COMPLETED_WITH_REJECTIONS.
statusHistory	Name/Value Pair	Main	R	Includes the list of events and corresponding timestamps from file processing. Includes the following Name attributes: • FILE_ACKNOWLEDGED • FILE_INTEGRITY_PASSED • RECORD_SCAN_COMPLETED • COMPLETED
rejectionItems	Multi- Dimensional Array	Main	С	Includes the list of file integrity error codes or records having data validation errors. Only present if the file had an integrity error or at least one record had a data validation error, and only when the file has reached the interim status of RECORD_SCAN_COMPLETED or the final statuses of COMPLETED_WITH_REJECTIONS or COMPLETED_INTEGRITY_ERROR.
rejectionID	Unsigned	Rejectio n Record	R	The unique ID reference for the particular record rejection reported on the FDID within the Submission File.
firmDesignatedID	Text (40)	Rejectio	С	The FDID of the record having the data validation

Field Name	Data Type	JSON Object	Includ e Key	Description
		n Record		error.
fdidRecordID	Unsigned	Rejectio n Record	С	A unique numeric reference to the FDID record within the particular submission file.
largeTraderRecordID	Unsigned	Rejectio n Record	С	A unique numeric reference to the Large Trader record in association to the FDID record within the particular submission file. Only populated on Large Trader rejections.
customerRejectionEventID	Unsigned	Rejectio n Record	С	The unique Customer Rejection Event ID assigned to the CAT Reporter Firm for the specific Customer – by TID – having one or more Rejections. This ID is used because the PII – including TID – of the Customer cannot be returned to the CAT Reporter after it is submitted to CAT. The unique ID is associated to the specific Customer TID for subsequent submissions of the Customer with rejections, until the Customer is cleanly accepted into CAIS.
customerRecordID	Unsigned	Rejectio n Record	С	A unique numeric reference to the Customer record within the particular submission file. Only populated on Customer rejections or on FDID rejections for an FDID-to-Customer association.
addrType	Text (2)	Rejectio n Record	С	A reference to the Address Type of the record within the particular submission. Only populated when the Address of the record resulted in the rejection. When populated, either firmDesignatedID or customerRecordID will always be populated.
errorCode	Unsigned	Rejectio n Record	R	The error code of the data validation, noting which attribute caused the rejection for the FDID or Customer record.
rejectionTimestamp	Timestamp	Rejectio n Record	R	Indicates the time at which the validation error was identified.
failedCorrectionItems	Multi- Dimensional Array	Main	С	Includes the list of Correction Action records having data validation warnings. Only present if at least one record had a data validation warning, and only when the file has reached the interim status of RECORD_SCAN_COMPLETED or a final status of COMPLETED_WITHOUT_REJECTIONS or COMPLETED_WITH_REJECTIONS.
failedRejectionID	Unsigned	Failed Correcti on Record	R	The unique ID reference reported in the submission file for the Correction Action that was not able to be processed.
warningCode	Unsigned	Failed Correcti on Record	R	The warning code of the data validation, noting which attribute caused the Correction Action to not be able to be processed.

Table 15: Elements of an Identifiers Feedback file

Field Name	Data Type	JSON Object	Includ e Key	Description
version	Text(10)	Main	R	The schema version of the feedback file used for providing the response.
submissionID	Unsigned	Main	R	The unique Submission ID assigned to the paired data and identifier submission files by the CAT CAIS system. Used to identify the single submission activity. If the same file name is submitted across multiple submissions, each submission instance will have a separate and unique Submission ID value.
submissionStatus	Choice	Main	R	The current status of the submission file in the processing flow. VALUES: • FILE_ACKNOWLEDGED – indicates the file was acknowledged as having been submitted, and has picked up for file integrity checks. • FILE_INTEGRITY_PASSED – indicates the file passed file integrity checks, and will now be processed through record data validations. • COMPLETED_INTEGRITY_ERROR – indicates the file failed file integrity checks and cannot be processed. No further updates will be made to the feedback file upon reaching this status. • COMPLETED – indicates the paired data and identifiers files have been successfully loaded into CAIS. Please refer to the feedback file for details regarding outcomes of record validations.
receivedTIDsCount	Unsigned	Main	С	Total count of TID records present within the file. Only populated when the file has reached the final status of COMPLETED .
successfulTIDsCount	Unsigned	Main	С	Total count of TID records processed without record validation warnings. Only populated when the file has reached the final status of COMPLETED.
statusHistory	Name/Value Pair	Main	R	Includes the list of events and corresponding timestamps from file processing. Includes the following Name attributes: • FILE_ACKNOWLEDGED • FILE_INTEGRITY_PASSED • COMPLETED_INTEGRITY_ERROR • COMPLETED
rejectionItems	Multi- Dimensional Array	Main	С	Includes the list of file integrity error codes or records having data validation errors. Only present if the file had an integrity error or at least one record had a data validation error, and only

Field Name	Data Type	JSON Object	Includ e Key	Description
				when the file has reached the interim status of RECORD_SCAN_COMPLETED or the final statuses of COMPLETED_WITH_REJECTIONS or COMPLETED_INTEGRITY_ERROR.
rejectionID	Unsigned	Rejectio n Record	R	The unique ID reference for the particular record rejection reported on the TID within the Submission File.
customerRecordID	Unsigned	Rejectio n Record	С	A unique numeric reference to the Customer record within the particular submission file. Always populated unless the rejection resulted from a malformed or missing customerRecordID.
errorCode	Unsigned	Rejectio n Record	С	The error code of the data validation, noting which attribute caused the rejection for the TID record.
rejectionTimestamp	Timestamp	Rejectio n Record	R	Indicates the time at which the validation error was identified.

Table 16: Elements of a Submission Inconsistencies Feedback file

Field Name	Data Type	JSON Object	Includ e Key	Description
version	Text(10)	Main	R	The schema version of the feedback file used for providing the response.
submissionID	Unsigned	Main	R	The unique Submission ID assigned to the paired data and identifier submission files by the CAT CAIS system. Used to identify the single submission activity. If the same file name is submitted across multiple submissions, each submission instance will have a separate and unique Submission ID value.
catSubmitterID	Unsigned	Main	R	The unique identifier assigned to the Submitter firm by CAT.
catReporterCRD	Unisgned	Main	R	The unique CRD identifier assigned to the CAT Reporter to whom the data belongs.
correspondentCRD	Unisgned	Main	С	The unique CRD identifier assigned to the related Introducing Broker or Correspondent firm. Only present when correspondentCRD is populated in the submission file.
submissionStatus	Choice	Main	R	The current status of the submission file in the processing flow. VALUES:
				COMPLETED_INTEGRITY_ERROR – indicates data and/or identifiers file failed file integrity checks and cannot be processed, and as such no inconsistency scanning occurred. No further updates will be made to the feedback file upon reaching this status. COMPLETED – indicates the paired

Field Name	Data Type	JSON Object	Includ e Key	Description
				data and identifiers files have been successfully loaded into CAIS and all identified inconsistencies have been detailed within the feedback file.
inconsistencyEventCount	Unsigned	Main	R	The count of the Inconsistency Events reported within the Inconsistency Feedback file.
inconsistencyList	Multi- Dimensional Array	Main	С	The list of Inconsistencies identified across the Active Customer records accepted into CAIS from this CAT Reporter firm.
inconsistencyEventID	Unsigned	Inconsis tency Record ID	R	The unique Inconsistency Event ID assigned to the CAT Reporter Firm for the specific Customer – by TID – having one or more Inconsistencies. This ID is used because the PII – including TID – of the Customer cannot be returned to the CAT Reporter after it is submitted to CAT.
customerRecordID	Unsigned	Inconsis tency Record	R	A unique numeric reference to the Customer record within the particular submission file having the inconsistency.
materialInconsistencies	Name/Value Pair	Inconsis tency Record	С	Includes the list of Material Inconsistency Codes and Count of Conflicting CAT Report Firms of the identified inconsistencies for the Customer record.
minorInconsistencies	Name/Value Pair	Inconsis tency Record	С	Includes the list of Minor Inconsistency Codes and Count of Conflicting CAT Report Firms of the identified inconsistencies for the Customer record. Minor Inconsistencies do not require repair or confirmation.
updateNotifications	Name/Value Pair	Inconsis tency Record	С	Includes the list of Update Notifications reported in the submission file for the Customer record that were acknowledged and bypassed a Material Inconsistency notification.

6.1.3. JSON Examples of Feedback File for file acknowledgement

The following is an example of a data feedback file after the submission has been acknowledged and accepted for file integrity checks:

Original Data File Submission File Name	123_456_20200204_CAIS_000123.json.bz2
Data Feedback File Name	123_456_20200204_CAIS_000123.v1.feedback.json.bz2
Feedback File Contents	<pre>{ "version": "2.0.0", "submissionID": 7, "submitterUsername": "caisimusr", "catSubmitterID": 123, "catReporterCRD": 456, "submissionStatus": "FILE_ACKNOWLEDGED", "receiptTimestamp": "20191123T152233.000045", "statusHistory": {</pre>

```
"FILE_ACKNOWLEDGED": "20191123T152233.000045"
}
}
```

The following is an example of an identifiers feedback file after the submission has been acknowledged and accepted for file integrity checks:

Original Identifiers File Submission File Name	123_456_20200204_TID_000123.json.bz2
Identifiers Feedback File Name	123_456_20200204_TID_000123.v1.feedback.json.bz2
Feedback File Contents	<pre>{ "version": "2.0.0", "submissionID": 15, "submissionStatus": "FILE_ACKNOWLEDGED", "receiptTimestamp": "20191123T152233.000045", "statusHistory": { "FILE_ACKNOWLEDGED": "20191123T152233.000045" } }</pre>

6.2. File Integrity

During the File Integrity processing stage, the submission file contents are also validated to ensure they are readable and formatted as expected.

The following rules apply:

- 1. Data filenames which duplicate prior submissions accepted during File Integrity will reject, unless the original file had a file integrity error.
- 2. Data files which are not readable will reject.
- 3. Data files which do not have a paired Identifiers file posted within 60 minutes will reject.
- 4. Data files which include inaccurate counts of records will reject.
- 5. Identifiers files which include inaccurate counts of TIDs will reject.
- 6. Identifiers files which do not have a paired Data file posted within 60 minutes will reject.
- 7. The CAT Submitter ID of the files must be equal to the Submitter ID of the submitter that sent the files (as determined from SFTP or CAT Reporter Portal CAIS username).
- 8. The CAT Reporter CRD within the filename must match the CAT Reporter CRD populated in the data file.
- 9. The paired Data and Identifiers files must be submitted by the same firm.
- 10. If the CAT Submitter is reporting on behalf of the CAT Reporter, a Reporting Relationship must be effective.

- 11. Data files that have an Integrity Error will result in the paired Identifiers file also having an Integrity Error; likewise, Identifiers files that have an Integrity Error will result in the paired Data file also having an Integrity Error.
- 12. If the Data and Identifiers files reach an Integrity Error state, the Inconsistencies submission feedback will also note the Integrity Error and no inconsistencies feedback will be included.

6.2.1. JSON Examples for File Integrity Feedback

File Submission Integrity Success:

Original Data File Submission File Name	123_456_20200204_CAIS_000123.json.bz2
Data Feedback File Name	123_456_20200204_CAIS_000123.v2.feedback.json.bz2
Feedback File Contents	<pre>{ "version": "1.0.0", "submissionID": 7, "catSubmitterID": 123, "catReporterCRD": 456, "submissionStatus": "FILE_INTEGRITY_PASSED", "receiptTimestamp": "20191123T152233.000045", "statusHistory": { "FILE_ACKNOWLEDGED": "20191123T152233.000045", "FILE_INTEGRITY_PASSED": "20191123T152234.123245" } }</pre>

Original Identifiers File Submission File Name	123_456_20200204_TID_000123.json.bz2
Identifiers Feedback File Name	123_456_20200204_TID_000123.v2.feedback.json.bz2
Feedback File Contents	<pre>"version": "2.0.0", "submissionID": 15, "submissionStatus": "FILE_INTEGRITY_PASSED", "statusHistory": { "FILE_ACKNOWLEDGED": "20191123T152233.000045000", "FILE_INTEGRITY_PASSED": "20191123T152234.123245000" } }</pre>

File Submission Integrity Error:

Original Data File Submission File Name	123_456_20200204_CAIS_000123.json.bz2
Data Feedback File Name	123_456_20200204_CAIS_000123.v2.feedback.json.bz2
Feedback File Contents	<pre>"version": "2.0.0", "submissionID": 7, "submitterUsername": "caisimusr", "catSubmitterID": 123, "catReporterCRD": 456,</pre>

Original Identifiers File Submission File Name	123_456_20200204_TID_000123.json.bz2
Feedback File Name	123_456_20200204_TID_000123.v2.feedback.json.bz2
Feedback File Contents	<pre>"version": "1.0.0", "submissionID": 15, "submissionStatus": "COMPLETED_INTEGRITY_ERROR", "receiptTimestamp": "20191123T152233.000045", "completedTimestamp": "20191123T152721.023423", "statusHistory": { "FILE_ACKNOWLEDGED": "20191123T152233.000045", "COMPLETED_INTEGRITY_ERROR": "20191123T152721.023423" }, "rejectionItems": [{ "rejectionID": 50012, "errorCode": 21016, "rejectionTimestamp": "20191123T152221.023423" }] }</pre>

6.3. Data Ingestion

During Data Ingestion, records within the Data file are validated. Validations to ensure correct syntax and semantics associated with record length, field length, data type, non-null and reference data checks are performed. Validations are initiated by the record type of every record contained in the file. Ingestion feedback will be provided with reference to any and all records that have validation errors.

During the ingestion phase, each record will be checked for proper formatting (JSON field names and values) and data contents.

The following rules apply:

1. File Ingestion feedback will be generated for every submission file passing file integrity checks.

- 2. Any record within a Data File determined to be malformed or otherwise invalid will be individually rejected, and will not cause a rejection of the full file.
- 3. Any record within an Identifiers File determined to be malformed or otherwise invalid will be individually rejected, and will not cause a rejection of the full file.
- 4. When a record is readable and can be parsed, Ingestion validations, Database layer validations, and Inconsistency checking will occur for every field within the record.
- 5. One or more errors may be found within a record.
- One or more inconsistencies may be found within a record, across multiple records within a file, or against other records accepted by CAT CAIS – including those submitted by another CAT Reporter firm.
- 7. Each error identified against a single FDID or Customer record will be listed separately within the feedback file.
- 8. Each inconsistency identified against a single Customer record will be listed in the feedback file against a single Inconsistency Event ID assigned to the Customer.
- 9. The original record reported to CAT CAIS will not be included in the feedback file. The feedback file will instead include the associated record IDs of the record having the error. If the error is on an FDID record, the FDID will also be included in the feedback file.
- 10. Records that are not rejected during Ingestion will be imported into the CAT CAIS, even if one or more Inconsistencies are identified in the accepted record.
- 11. If an FDID record passes validation, but contains one or more errors on associated LTIDs, the FDID record will be rejected and no updates from the record will be stored into CAIS.
- 12. If an FDID record passes validation, but contains one or more errors on associated Customer records, the FDID record will be rejected and no updates from the record will be stored into CAIS.

6.3.1. JSON Examples for Data Ingestion Feedback

Data File Submission Ingestion Success:

Original Data File Submission File Name	123_456_20200204_CAIS_000123.json.bz2
Data Feedback File Name	123_456_20200204_CAIS_000123.v3.feedback.json.bz2
Feedback File Contents	<pre>"version": "2.0.0", "submissionID": 7, "submitterUsername": "caisimusr", "catSubmitterID": 123, "catReporterCRD": 456, "submissionStatus": "COMPLETED_WITHOUT_REJECTIONS", "receiptTimestamp": "20191123T152233.000045000", "completedTimestamp": "20191123T152721.023423000", "receivedFDIDRecordCount": 100, "successfulFDIDRecordCount": 100, "receivedCorrectionActionCount": 0,</pre>
	"receivedFDIDRecordCount": 100, "successfulFDIDRecordCount": 100,

```
"receivedNaturalRecordCount": 1,
    "successfulNaturalRecordCount": 1,
    "receivedLegalEntityRecordCount": 1,
    "successfulLegalEntityRecordCount": 1,
    "statusHistory": {
        "FILE_ACKNOWLEDGED": "20191123T152233.000045000",
        "FILE_INTEGRITY_PASSED": "20191123T152234.123245000",
        "RECORD_SCAN_COMPLETED": "20191123T152255.324392000",
        "COMPLETED_WITHOUT_REJECTIONS":
    "20191123T152721.023423000"
    }
}
```

```
123_456_20200204_TID_000123.json.bz2
Original Identifiers File Submission File
Name
                                   123 456 20200204 TID 000123.v3.feedback.json.bz2
Identifiers Feedback File Name
Feedback File Contents
                                      "version": "2.0.0",
                                      "submissionID": 15,
                                      "submissionStatus": "COMPLETED",
                                      "receivedTIDsCount": "7",
                                      "successfulTIDsCount": "7",
                                      "statusHistory": {
                                        "FILE ACKNOWLEDGED": "20191123T152233.000045000",
                                        "FILE INTEGRITY_PASSED": "20191123T152234.123245000",
                                        "COMPLETED": "20191123T152721.023423000"
                                      }
```

Data File Submission Ingestion Error and Failed Correction:

	123 456 20200204 CAIS 000123.json.bz2					
Original Data File Submission File Name						
Data Feedback File Name	123_456_20200204_CAIS_000123.v3.feedback.json.bz2					
	{					
Feedback File Contents	"version": "2.0.0",					
	"submissionID": 7,					
	"submitterUsername": "caisimusr",					
	"catSubmitterID": 123,					
	"catReporterCRD": 456,					
	"submissionStatus": "COMPLETED_WITH_REJECTIONS",					
	"receiptTimestamp": "20191123T152233.000045",					
	"completedTimestamp": "20191123T152721.023423",					
	"receivedFDIDRecordCount": 100,					
	"successfulFDIDRecordCount": 99,					
	"receivedCorrectionActionCount": 1,					
	"successfulCorrectionActionCount": 0,					
	"statusHistory": {					
	"FILE_ACKNOWLEDGED": "20191123T152233.000045",					
	"FILE_INTEGRITY_PASSED": "20191123T152234.123245",					
	"RECORD_SCAN_COMPLETED": "20191123T152255.324392",					
	"COMPLETED_WITH_REJECTIONS": "20191123T152721.023423"					
	"rejectionItems": [
	"rejectionID": 1127, "firmDesignatedID": "ABC123",					

```
"fdidRecordID": 4,
    "largeTraderRecordID": 2,
    "errorCode": 22012,
    "rejectionTimestamp": "20191123T152221.023423"
},
{
    "rejectionID": 9985,
    "customerRecordID": 45,
    "errorCode": 22505,
    "rejectionTimestamp": "20191123T152221.023423"
}

,
    "failedCorrectionItems": [
    {
        "rejectionID": 5000,
        "warningCode": 24002
    }
}
]
```

Original Identifiers File Submission File	123_456_20200204_TID_000123.json.bz2
Name	
Identifiers Feedback File Name	123_456_20200204_TID_000123.v3.feedback.json.bz2
Feedback File Contents	<pre>{ "version": "2.0.0", "submissionID": 15, "submissionStatus": "COMPLETED", "receivedTIDsCount": "7", "successfulTIDsCount": "6", "statusHistory": { "FILE_ACKNOWLEDGED": "20191123T152233.000045000", "FILE_INTEGRITY_PASSED": "20191123T152234.123245000", "COMPLETED": "20191123T152721.023423000" }, "rejectionItems": [{ "rejectionID": 50012, "customerRecordID": 73, "errorCode": 22906, "rejectionTimestamp": "20191123T152221.023423" }] }</pre>

6.4. Submission Inconsistencies

Inconsistencies identified during CAT CAIS processing when comparing the data in the file to the data present in CAIS for the same CAT Customer will be included in the submission inconsistencies feedback file.

The following rules apply:

- 1. If the Data and Identifiers files reach an Integrity Error state, the Inconsistencies submission feedback will also note the Integrity Error and no inconsistencies feedback will be included.
- 2. Records that have a data validation error and are rejected will not be checked for Inconsistencies.

6.4.1. JSON Examples for Submission Inconsistencies Feedback

File Submission Integrity Success:

```
123 456 20200204 CAIS 000123.json.bz2
Original Data File Submission File Name
                                   123 456 20200204 INCONSISTENCIES 000123.v1.feedback.json.
Submission Inconsistencies Feedback
                                   bz2
File Name
Feedback File Contents
                                      "version": "2.0.0",
                                      "submissionID": 7,
                                      "catSubmitterID": 123,
                                      "catReporterCRD": 456,
                                      "submissionStatus": "COMPLETED",
                                      "inconsistencyEventCount":3,
                                      "inconsistencyList": [
                                          "inconsistencyEventID": 12000,
                                          "customerRecordID": 15,
                                          "materialInconsistencies": {
                                            "30002": "1"
                                        },
                                          "inconsistencyEventID": 12001,
                                          "customerRecordID": 99,
                                          "materialInconsistencies": {
                                            "30003": "1"
                                        }
                                      ]
```

File Submission Integrity Error:

Original Data File Submission File Name	123_456_20200204_CAIS_000123.json.bz2
Submission Inconsistencies Feedback File Name	123_456_20200204_INCONSISTENCIES_000123.v1.feedback.json.bz2
Feedback File Contents	<pre>"version": "2.0.0", "submissionID": 7, "catSubmitterID": 123, "catReporterCRD": 456, "submissionStatus": "COMPLETED_INTEGRITY_ERROR" }</pre>

6.5. Corrections

Errors found during CAT CAIS processing and found by CAT Reporters subsequent to transmission must be repaired. The reporting of Error Corrections is facilitated in CAT CAIS through submissions via SFTP and the CAT Reporter Portal - CAIS. Firm-initiated corrections of data that had been accepted in prior CAT CAIS submissions are acceptable at any time, and will be processed the same as any other update to the original record. The new data provided on the corrected record will update the currently stored record in CAT CAIS in place.

The following scenarios will be detailed below for how data can be corrected:

- Correction or Clearing of a CAT CAIS Submission File having a File Integrity Error
- Correction or Deletion of an FDID record failing FDID format validation
- Correction or Deletion of a Customer record failing TID format validation
- Correction of an FDID record failing one or more Data Validation errors other than FDID format validation
- Correction of a Customer record failing one or more Data Validation errors other than LTID format validation

6.5.1. File Integrity Errors

A File Integrity Error resulting in the inability to process a particular Submission File can be corrected by submission of a new file having the same Submission File Name, with corrected data that passes File Integrity checks.

If a file is received having the same Submission File Name as a prior submission that did not have a File Integrity Error, the new submission file will be rejected as a File Integrity Warning, alerting the firm that they have reused the same Submission File Name as a file that was previously accepted by CAT CAIS. The firm does not have to take further action to correct for this submission file, however please be advised that the data included in the submission file will not be processed through Data Validation nor accepted into CAT CAIS.

6.5.2. Data Validation Errors

6.5.2.1. Missing or Invalid firmDesignatedID and Malformed TID Records

In order to support historical correction tracking and lineage of replacements, records failing Data Validation for a Missing or Invalid FDID, or a Malformed TID record, may be corrected through either of the following methods:

- Submission of a CORRECTION action within the correctionsList section of the Submission File, having a reference to the FDID or Customer Record ID that corrects for the prior failed record; OR
- Submission of a DELETE action within the correctionsList section of the Submission File,
 indicating no record is required to be submitted in place of the prior record failing validation

In the CORRECTION scenario

- For an FDID the replacing FDID record must be included within the current Submission File and
 pass all data validation checks, or the replacing FDID record must have been accepted by CAT
 CAIS in a prior submission.
- For a TID the correcting Customer record must be included in the current Submission File, as it
 is not permissible to include the correcting TID reference within the data submission file without
 the full Customer record.

If the referenced correction record fails Data Validation for the format of its FDID or TID value, a separate rejection will be created against the replacement record, and the original rejection will remain open for correction. If the reference correction record passes Data Validation for format of the FDID or TID, the original rejection will be closed as corrected, even if the correcting record fails a separate Data Validation; however a new rejection will be recorded and tracked against the timeline for correction of the original error.

6.5.2.2. Data Validation Errors

If a submission record fails Data Validation checks for any reasons other than the format of the FDID or TID value, rejections can be corrected by submitting the same FDID or TID, with corrected data. If the new submission fails for the same data validation, the prior rejection for the record will be considered repaired, and a new rejection will be created, however the new rejection will be tracked against the timeline for correction of the original error. If the new submission fails validation against a separate attribute, the original rejection will be closed as corrected, and a new rejection will be created for the separate attribute validation failure, however the new rejection will be tracked against the timeline for correction of the original error.

7. Nightly Data Inconsistencies Feedback

Each night the CAIS database will be scanned for data inconsistencies present on Active Customer Records within the system. Any Inconsistencies that are identified within CAIS data for Active customers triggered by another submitter now initiate a window for correction/confirmation for any firm notified of the inconsistency.

The following rules apply to Data Inconsistencies Feedback Files:

- 1. An Inconsistencies Feedback file will be generated for each CAT Reporter Firm each night, even if they have no Inconsistencies open against their submitted Customer Record data.
- 2. The Inconsistencies Feedback file will be posted to the inconsistencies feedback directory of the CAT Reporter Firm whose data was evaluated for inconsistencies.
- 3. Material Inconsistencies will have a deadline for confirmation or correction, which will be included in the feedback file.
- 4. If a CAT Reporter Firm attempts to confirm or correct for a Material Inconsistency, but the submission record is rejected or the changes trigger a new Material Inconsistency for the same Customer record, the original inconsistency deadline will remain.
- 5. Minor Inconsistencies will be noted within the data inconsistencies feedback file one time, after which they will no longer be included in the feedback file until another Minor Inconsistency is identified for the customer record.
- 6. Minor Inconsistencies identified within the submission of a CAT Reporter Firm will be noted in the Submission Feedback file, and will also be reported one time within the data inconsistencies feedback file, after which they will no longer be included until another Minor Inconsistency is identified for the customer.
- 7. The CAT Reporter Firm is not required to take action on Minor Inconsistencies; they are provided for information purposes only.
- 8. In the event a Material Inconsistency is identified against a Customer record due to conflicting data from another CAT Reporter Firm for the same Customer, and is closed following the resubmission of the Customer record with the *updateNotification* attribute, it will not result in a new Material Inconsistency against the same Customer record unless a CAT Reporter Firm submits the same Customer with data that introduces a new Material Inconsistency.

7.1.1. Data Inconsistencies Feedback File Names

1. Inconsistencies files will be named using the following format:

```
<CAT Reporter CRD>_<File Generation Date>_<File Kind>.<Format Extension>.<Compression Extension>
```

For example: 123_20200101_INCONSISTENCIES.json.bz2

2. The values assigned within the format of a file name include:

Table 17: Elements of an Inconsistencies Feedback File Name

Field Name	Data Type	Description	Include Key
CAT Reporter CRD	Unsigned	The CRD assigned identifier of the firm within which the inconsistencies were identified.	R
File Generation Date	Date	The date the file was generated or reported. Used to guarantee uniqueness of a file across dates.	R
File Kind	Alphanumeric (20)	Set to 'INCONSISTENCIES'.	R
Format Extension	Alphanumeric (4)	Represents the format of the data submission. JSON formatted inconsistency feedback files must be 'json'.	R
Compression Extension	Alphanumeric (3)	Applicable to Data Files. Set to 'bz2'.	R

Table 18: Elements of an Inconsistency Feedback file

Field Name	Data Type	JSON Object	Includ e Key	Description	
version	Text(10)	Main	R	The schema version of the feedback file used for providing the response. Initial version will be 2.0.0.	
fileGenerationTimestamp	Timestamp	Main	R	Time at which the Inconsistency File was generated.	
reporterCRD	Unsigned	Main	R	The CRD of the CAT Reporter Firm for whom the Inconsistency Feedback file was generated.	
inconsistencyEventCount	Unsigned	Main	R	The count of the Inconsistency Events reported within the Inconsistency Feedback file.	
inconsistencyList	Multi- Dimensional Array	Main	С	The list of Inconsistencies identified across the Active Customer records accepted into CAIS from this CAT Reporter firm.	
inconsistencyEventID	Unsigned	Inconsis tency Record ID	R	The unique Inconsistency Event ID assigned to the CAT Reporter Firm for the specific Customer – by TID – having one or more Inconsistencies. This ID is used because the PII – including TID – of the Customer cannot be returned to the CAT Reporter after it is submitted to CAT.	
inconsistencyDeadline	Date (8)	Inconsis tency Record	С	Deadline for repair or confirmation of data inconsistency event. Only provided if at least one Material Inconsistency exists for Customer.	
lastSubmittedFileName	Text(100)	Inconsis tency Record ID	R	Name of the file in which the Inconsistent Customer was last submitted into CAIS for the CAT Reporter to use in determining what data was included in the Customer submission.	

Field Name	Data Type	JSON Object	Includ e Key	Description
lastSubmittedRecordID	Unsigned	Inconsis tency Record	R	Customer Record ID under which the Inconsistent Customer was last submitted into CAIS for the CAT Reporter to use in determining what data was included in the Customer submission.
materialInconsistencies	Name/Value Pair	Inconsis tency Record	С	Includes the list of Material Inconsistency Codes and Count of Conflicting CAT Report Firms of the identified inconsistencies for the Customer record.
minorInconsistencies	Name/Value Pair	Inconsis tency Record	С	Includes the list of Minor Inconsistency Codes and Count of Conflicting CAT Report Firms of the identified inconsistencies for the Customer record. Minor Inconsistencies do not require repair or confirmation.

7.1.2. JSON Examples for Data Inconsistencies Feedback

The following JSON example demonstrates the structure of a Data Inconsistencies Feedback file.

```
{
 "version": "2.0.0",
 "fileGenerationTimestamp": "20230731T223233.000045",
 "reporterCRD": 999,
 "inconsistencyEventCount": 4,
 "inconsistencyList": [
     "inconsistencyEventID": 10125,
     "inconsistencyDeadline": "20230803",
     "lastSubmittedFileName": "999_999_20230724_CAIS_000123.json.bz2",
     "lastSubmittedRecordID": "15",
     "materialInconsistencies": {
   "30001": "1",
    "30005": "4"
     "minorInconsistencies": {
   "31002": "3",
   "31003": "1"
     }
   } ,
     "inconsistencyEventID": 954,
     "inconsistencyDeadline": "20230802",
     "lastSubmittedFileName": "123 999 20230601 CAIS 000003.json.bz2",
     "lastSubmittedRecordID": "999",
     "materialInconsistencies": {
   "30002": "15"
     }
   },
     "inconsistencyEventID": 17,
     "lastSubmittedFileName": "123 999 20230704 CAIS 000001.json.bz2",
```

```
"lastSubmittedRecordID": "1",
    "minorInconsistencies": {
    "31003": "1"
        }
    },
    {
        "inconsistencyEventID": 10297,
        "lastSubmittedFileName": "999_999_20230724_CAIS_000001.json.bz2",
        "lastSubmittedRecordID": "33",
        "materialInconsistencies": {
        "30021": "8"
        }
    }
}
```

8. Testing

CAT will provide an environment for testing that mirrors the current functionality of the CAT CAIS production environment, as well as functionality for the next release version of the CAT CAIS environment when available. The CAT CAIS testing environment will automatically determine which specification version Industry Members and CAT Reporting Agents are using for submissions. If error reporting formats change, Industry Members and CAT Reporting Agents will receive feedback in the current and new specification via SFTP, as well as have access to current/new CAT Reporter Portal - CAIS URLs for specification changes that impact the CAT Reporter Portal - CAIS. Current/new connectivity changes will also be supported concurrently.

Industry Members and CAT Reporting Agents must test their submissions using the testing environment before they begin submitting to the production environment.

The test environment is available 24 hours a day, 6 days a week. Refer to the CAT website for contact information and hours of operation for support.

Industry Members and CAT Reporting Agents connect to the test environment in the same manner they would connect to the production environment. However, for the connection to the test environment, one or more alternate IP addresses or URLs may be used.

Testing does not relieve an Industry Member of its responsibilities to submit production data to the CAT System.

9. Additional Information

9.1. Public Website

The CAT public website, www.catnmsplan.com, is available via the public internet, and is hosted outside the CAT secure network. The CAT public website provides information about CAT, including links to SEC Rule 613, Participant and Industry Member Technical Specifications, FAQs, training materials, and CAT Help Desk contact information.

Web announcements will be made available on the public website (www.catnmsplan.com). You can also subscribe to receive email notifications regarding changes to the website. These announcements are used to post information related to the operation of CAT.

Contact help@finracat.com for any questions and/or feedback regarding this document.

Appendices

Appendix A: Change Release Management Process

Following publication of version 1.0, changes to this Industry Member Technical Specification will be released as follows:

- All proposed amendments to the Technical Specifications will be made in accordance with the CAT NMS Plan, including being approved or deemed approved (as applicable) by the Consolidated Audit Trail, LLC Operating Committee.
- Prior to the go-live date for any system changes set forth in the Technical Specifications:
 - A new Technical Specifications will be posted to the CAT public website, www.catnmsplan.com.
 - A notice will be posted on the CAT NMS Plan public website with a summary of changes, the go-live date for the changes and links to relevant information.
 - One or more email alerts will be sent to the email address(es) on file for the CAT Reporters
 with a summary of changes set forth in the revised Technical Specifications, the go-live date
 for the changes and links to relevant information.
 - Industry Members will be permitted to perform testing of the revised Technical Specifications in advance of the go-live date for the changes. Information on such testing will be set forth in the notices and alerts described above.
 - As the go-live date approaches, Industry Members will be able to conduct testing and will receive support from the Plan Processor to prepare for production reporting using the revised Technical Specifications format. The revised Technical Specifications will include a summary list of changes as well as a table listing the specific areas of the document where the changes have been made.

Appendix B: Error Codes

This section defines the error and warning codes generated by CAT CAIS. Each code is defined to include the reason for the error or warning, including the associated fields. Warnings are not subject to further processing and firms are not required to take any action on them. Codes are assigned in ranges to represent similar types of errors within the same range, related by validation type and/or by linkage type. Codes are organized by the CAT Processing stages including:

- File Integrity
- Data Ingestion
- Data Inconsistency Checking

B.1 File Integrity Errors

The table below contains error messages that are associated with file integrity. Errors are associated with files, filenames, and metadata within submission files such as record count.

Table 19: Data File Integrity Errors

Error Code	Error Code Description	Explanation	Error/ Warning
21001	Duplicate File	A file with the same base name was previously accepted by CAT.	Warning
21002	Missing or Invalid CAT Submitter ID	CAT Submitter ID is missing or invalid.	Error
21003	Missing or Invalid CAT Reporter CRD	CAT Reporter CRD is missing or is not a valid Market Participant for the Generation Date.	Error
21004	Missing or Invalid File Generation Date	File Generation Date is missing or is not a valid date.	Error
21005	File exceeds the supported size limit	File size exceeds the maximum uncompressed size of 100 GB via SFTP and 1GB via the CAT Reporter Portal - CAIS.	Error
21006	Unauthorized CAT Submitter ID	CAT Submitter ID has not been authorized to submit for the CAT Reporter CRD. Verify that the CAT Submitter ID and CAT Reporter CRD in the file name have a transmitting relationship.	Error
21007	Missing or Invalid FDID record count	The FDID record count in the submission file is missing or is a negative number, does not match the count of FDID records within the file, or is a non-zero number for DEL file.	Error
21008	Missing or Invalid File Version	File Version in submission file is missing or invalid.	Error
21009	File exceeds maximum records allowed for	A single data file uploaded via the Reporter Portal must not contain more than 100,000 FDID records.	Error

Error Code	Error Code Description	Explanation	Error/ Warning
	Web upload		
21010	Invalid CAIS File Name	CAIS submission file names must follow the defined format.	Error
21011	CAIS file not Readable	CAIS submission file format is not readable as it is not in a valid JSON format or contains an incorrect delimiter.	Error
21012	Unknown Attribute Name	The file contains a file level attribute that is not known under the reported specification version.	Error
21013	CAIS File cannot be Uncompressed	The CAIS submission file was not properly compressed and cannot be processed.	Error
21014	Paired Identifiers file not received	The paired Identifiers file for the data file was not received in time.	Error
21015	Paired Identifiers file has Integrity Error	The paired Identifiers file for the data file has an Integrity Error, and the Data file will not be processed.	Error
21016	Missing or Invalid Natural Person Customer Record Count	The Natural Person Customer record count in the submission file is missing or is a negative number, or does not match the count of Natural Person Customer records within the file.	Error
21017	Missing or Invalid Legal Entity Customer Record Count	The Legal Entity Customer record count in the submission file is missing or is a negative number, or does not match the count of Legal Entity Customer records within the file.	Error
21018	Invalid correspondentCRD	When populated, correspondentCRD must be a valid CRD value.	Error

Table 20: Identifiers File Integrity Errors

Error Code	Error Code Description	Explanation	Error/ Warning
21501	Duplicate File	A file with the same base name was previously accepted by CAT.	Warning
21502	Missing or Invalid CAT Submitter ID	CAT Submitter ID is missing or invalid.	Error
21503	Missing or Invalid CAT Reporter CRD	CAT Reporter CRD is missing or is not a valid Market Participant for the Generation Date.	Error
21504	Missing or Invalid File Generation Date	File Generation Date is missing or is not a valid date.	Error
21505	File exceeds the supported size limit	File size exceeds the maximum uncompressed size of 100 GB via SFTP and 1GB via the CAT Reporter Portal - CAIS.	Error
21507	Missing or Invalid TID record count	The TID record count in the submission file is missing or is a negative number, or does not match the count of TID records within the file.	Error

Error Code	Error Code Description	Explanation	Error/ Warning
21508	Missing or Invalid File Version	File Version in submission file is missing or invalid.	Error
21509	File exceeds maximum records allowed for Web upload	A single Identifier file uploaded via the Reporter Portal must not contain more than 100,000 TID records.	Error
21510	Invalid CAIS File Name	CAIS Identifier file names must follow the defined format.	Error
21511	CAIS file not Readable	CAIS Identifier file format is not readable as it is not in a valid JSON format or contains an incorrect delimiter.	Error
21512	Unknown Attribute Name	The file contains a file level attribute that is not known under the reported specification version.	Error
21513	CAIS File cannot be Uncompressed	The CAIS Identifier file was not properly compressed and cannot be processed.	Error
21514	Paired Data file not received	The paired Data file for the Identifiers file was not received in time.	Error
21515	Paired Data file has Integrity Error	The paired Data file for the Identifiers file has an Integrity Error, and the Identifiers file will not be processed.	Error

B.2 Data Validation Errors

The table below contains error messages that are associated with Data Ingestion. Error codes are associated with specific fields within a submission record.

Table 21: Data Validation Errors

Error Code	Error Code Description	Explanation	Warning/ Error
22001	Missing or Invalid firmDesignatedID	firmDesignatedID must be present and populated for each account record within the file. Affected record will not be processed for further validation checks.	Error
22002	Duplicated firmDesignatedID	Each FirmDesignatedID must be present in the submission file only once. Affected records will not be processed for further validation checks.	Error
22003	Missing or Invalid fdidRecordID	fdidRecordID must be present and populated for each account record within the file. Affected record will not be processed for further validation checks.	Error
22004	Duplicated fdidRecordID	Each <i>fdidRecordID</i> must be present in the submission file only once. Affected records will not be processed for further validation checks.	Error
22005	Missing or Invalid fdidType	fdidType must be present and populated with one of the allowable values.	Error
22006	Duplicated largeTraderID	Each largeTraderID must be present only once for a single FDID record.	Error

Error Code	Error Code Description	Explanation	Warning/ Error
22007	Missing or Invalid format of <i>fdidDate</i>	fdidDate must be populated in the correct format. Affected record will not be processed for further validation checks.	Error
22008	Missing or Invalid fdidEndDate	When populated, <i>fdidEndDate</i> must be in the correct format. Must be populated if <i>fdidEndReason</i> is populated.	Error
22009	fdidEndDate set prior to fdidDate	When populated, <i>fdidEndDate</i> must be equal to or later than <i>fdidDate</i> .	Error
22010	Missing or Invalid fdidEndReason	When populated, <i>fdidEndReason</i> must use one of the allowable values. Must be populated if <i>fdidEndDate</i> is populated.	Error
22011	Missing or Invalid replacedByFDID	When populated, <i>replacedByFDID</i> must be in the correct format for an FDID. Must be populated if <i>fdidEndReason</i> is set to REPLACED.	Error
22012	Missing or Invalid format of largeTraderID	When populated, <i>largeTraderID</i> must be in the correct format for either a Large Trader ID or an Unidentified Large Trader ID. Must be populated for each Large Trader record. Affected record will not be processed for further validation checks.	Error
22013	Missing or Invalid largeTraderRecordID	largeTraderRecordID must be present and populated for each Large Trader record within the file. Affected record will not be processed for further validation checks.	Error
22014	Duplicated largeTraderRecordID	Each <i>largeTraderRecordID</i> reported for a single FDID record within the file must be present only once.	Error
22015	Missing or Invalid ItidEffectiveDate	ItidEffectiveDate must be populated in the correct format.	Error
22016	Missing or Invalid ItidEndDate	When populated, <i>ItidEndDate</i> must be in the correct format. Must be populated if <i>ItidEndReason</i> is populated.	Error
22017	Missing or Invalid ItidEndReason	When populated, <i>ItidEndReason</i> must use one of the allowable values. Must be populated if <i>ItidEndDate</i> is populated.	Error
22018	Unknown Attribute Name	The record contains an attribute that is not known under the reported specification version.	Error
22024	replacedByFDID must not be equal to firmDesignatedID	When populated, <i>replacedByFDID</i> must be a different value than the <i>firmDesignatedID</i> .	Error
22028	ItidEndDate set prior to ItidEffectiveDate	ItidEndDate must not be set to a value prior to the ItidEffectiveDate	Error
22034	Data type violation - FDID	FDID Record contains one or more attribute values that violate the data type for the attribute.	Error
22035	Improper Use of Address Lines	addrLine3 must not be present and populated unless addrLine2 is also present and populated. addrLine4 must not be present and populated unless addrLine2 and addrLine3 are both present and populated.	Error
22036	Missing city	City must be present and populated for each Address	Error

Error Code	Error Code Description	Explanation	Warning/ Error
		Record present for each FDID record within the file.	
22037	Missing or Invalid regionCode	regionCode must be present and populated for each Address Record present for each FDID record within the file if the countryCode included has a corresponding list of regions in Appendix E.	Error
22038	Missing or Invalid countryCode	countryCode must be present and populated for each Address Record present for each FDID record within the file.	Error
22039	Missing or Invalid format of postalCode	postalCode must be present and populated for each Address Record present for each FDID record within the file if the countryCode included has a corresponding Postal Code in Appendix E.	
22040	Missing fdidCustomerList	fdidCustomerList must be present for each FDID record within the file.	Error
22041	Missing or Invalid customerRecordID within fdidCustomerList	customerRecordID must be present and populated for each record within the fdidCustomerList object, and reference a customerRecordID also present in either the naturalPersonCustomerList or legalEntityCustomerList. Affected record will not be processed for further validation checks.	Error
22042	Multiple active roles for customerRecordID within fdidCustomerList	Each customerRecordID must be present in the fdidCustomerList of a single FDID record only once without a set roleEndDate. Affected records will not be processed for further validation checks.	Error
22043	Missing or Invalid role	role must be present and populated for each record within the fdidCustomerList object.	Error
22044	Missing or Invalid roleStartDate	roleStartDate must be present and populated for each record within the fdidCustomerList object.	Error
22045	Missing or Invalid roleEndDate	When populated, <i>roleEndDate</i> must be in the correct format. Must be populated if <i>roleEndReason</i> is populated.	Error
22046	roleEndDate set prior to roleStartDate	When populated, <i>roleEndDate</i> must be equal to or later than <i>roleStartDate</i> .	Error
22047	Missing or Invalid roleEndReason	When populated, <i>roleEndReason</i> must use one of the allowable values. Must be populated if <i>roleEndDate</i> is populated.	Error
22048	Associated Customer Record rejected on another FDID	The FDID record is rejected because an associated Customer Record is rejected on another FDID Record within the file.	Error
22049	Missing or Invalid accountType	accountType must be present and populated with only valid values for each FDID record within the file.	Error
22050	Missing or Invalid accountName	accountName must be present and populated for each FDID record within the file.	Error
22051	Neither <i>primeBrokerID</i> nor <i>bankDepositoryID</i> populated	One of <i>primeBrokerID</i> or <i>bankDepositoryID</i> must be populated for every FDID record where <i>accountType</i> includes the value DVP/RVP.	Error
22052	Missing branchOfficeCRD	branchOfficeCRD must be present and populated for each FDID record within the file.	Error

Error Code	Error Code Description	Explanation	Warning/ Error
22053	Reserved	Reserved for future use	
22054	Invalid priorCATReporterCRD	When populated, <i>priorCATReporterCRD</i> must be a valid CAT Reporter CRD value.	Error
22055	Missing ADDRESS1 type Address Record	An Address Record of type ADDRESS1 must be present for each FDID record within the file.	Error
22056	Missing addrLine1	Each Address Record for each FDID record within the file must have a populate addrLine1.	Error
22057	Missing or invalid addrType	addrType must be present and populated with a valid value for each Address Record present for each FDID record within the file.	Error
22501	Missing or Invalid customerRecordID	customerRecordID must be present and populated for each customer record within the file. Affected record will not be processed for further validation checks.	Error
22502	Duplicated customerRecordID	Each customerRecordID must be present in the submission file only once. Affected records will not be processed for further validation checks.	Error
22503	Invalid updateNotification	When populated, <i>updateNotification</i> must be a valid value.	Error
22504	Missing or Invalid format of ein	ein must be present and populated for each Legal Entity Customer Record within the file if the tidType is EIN. Must be present in the appropriate format.	Error
22505	Missing customerStartDate	customerStartDate must be present and populated for each Customer record within the file.	Error
22507	Missing firstName	firstName must be present and populated for each Natural Person Customer record within the file.	Error
22508	Missing lastName	lastName must be present and populated for each Natural Person Customer record within the file.	Error
22509	Invalid nameSuffix	nameSuffix must be populated with one of the allowable values.	Error
22510	Missing or Invalid format of yearOfBirth	yearOfBirth must be populated in the correct format for each Natural Person Customer record within the file.	Error
22511	Missing or Invalid customerEndDate	When populated, customerEndDate must be in the correct format. Must be populated if customerEndReason is populated.	Error
22512	customerEndDate set prior to customerStartDate	When populated, customerEndDate must be equal to or later than customerStartDate.	Error
22513	Missing or Invalid customerEndReason	When populated, <i>customerEndReason</i> must use one of the allowable values. Must be populated if <i>customerEndDate</i> is populated.	Error
22514	Missing ADDRESS1 type Address Record	When an Address Record is included for a Customer Record, an ADDRESS1 type Address Record must always be present.	Error
22515	Missing addrLine1	Each Address Record for each Customer record within the file must have a populated addrLine1.	Error

Error Code	Error Code Description	Explanation	Warning/ Error
22516	Missing or invalid addrType	addrType must be present and populated with a valid value for each Address Record present for each Customer record within the file.	Error
22517	Improper Use of Address Lines	addrLine3 must not be present and populated unless addrLine2 is also present and populated.	Error
		addrLine4 must not be present and populated unless addrLine2 and addrLine3 are both present and populated.	
22518	Missing city	City must be present and populated for each Address Record present for each FDID record within the file.	Error
22519	Missing or Invalid regionCode	regionCode must be present and populated for each Address Record present for each Customer record within the file if the countryCode included has a corresponding list of regions in Appendix E.	Error
22520	Missing or Invalid countryCode	countryCode must be present and populated for each Address Record present for each Customer record within the file.	Error
22521	Missing or Invalid format of postalCode	postalCode must be present and populated in the valid format for each Address Record present for each Customer record within the file if the countryCode included has a corresponding Postal Code in Appendix E.	Error
22522	Data type violation - Customer	Customer Record contains one or more attribute values that violate the data type for the attribute.	Error
22523	Customer Record rejected because all associated FDIDs are rejected	The Customer Record is rejected because all FDIDs in the file with association to the Customer Record have been rejected.	Error
22524	Missing or Invalid customerType	customerType must be present and populated with a valid value for each Customer record within the file	Error
22525	Customer Record has an open Material Inconsistency and updateNotification was not set as true	The Customer Record has an open Material Inconsistency requiring repair, however the submission does not include the <i>updateNotification</i> attribute was either not included in the submission, or was not set as true.	Error
22526	customerRecordID not present in paired Identifiers file	Each <i>customerRecordID</i> present in the data file must have a corresponding entry in the paired Identifiers submission file.	Error
22900	Malformed TID Record – CAT Customer record not processed	The entry for this CAT Customer in the Transformed Identifiers file was malformed and could not be processed.	Error
22908	Paired TID Record failed – Missing or invalid replacedByTIDType	When present, replacedByTIDType must be populated with a valid value. replacedByTIDType must be present and populated when replacedByTID is populated.	Error
22909	Paired TID Record failed – Missing or invalid replacingForeignTIDType	replacingForeignTIDType must be present and populated for each record in the file where replacedByTIDType is FOREIGN. replacingForeignTIDType must not be populated for any record in the file where replacedByTIDType is not	Error

Error Code	Error Code Description	Explanation	Warning/ Error
		set as FOREIGN.	
22910	Paired TID Record failed – Missing or invalid replacingForeignTIDCoun tryCd	replacingForeignTIDCountryCd must be present and populated with a valid value for each record in the file where replacedByTIDType is FOREIGN and replacingForeignTIDType is not LEI. replacingForeignTIDCountryCd must not be populated for any record in the file where replacedByTIDType is not set as FOREIGN, or where tidType is set as FOREIGN and replacingForeignTIDType is set as LEI.	Error
22911	Paired TID Record failed – Missing or invalid replacedByTID	When present, replacedByTID must be a 64 byte hexadecimal value. Must be present when replacedByTIDType is populated.	Error
22912	Paired TID Record failed – Invalid Input Identifier used to generate replacedByTID for replacedByTIDType of SSN/ITIN	When replacedByTIDType is SSN/ITIN, the original Input Identifier used to generate the replacedByTID must be properly formatted and adhere to the valid range of the SSN/ITIN identifier type.	Error
22913	Paired TID Record failed - Invalid Input Identifier used to generate replacedByTID for replacedByTIDType of EIN	When replacedByTIDType is EIN, the original Input Identifier used to generate the replacedByTID must be properly formatted and adhere to the valid range of the EIN identifier type.	Error

B.3 Data Layer Validation Error Codes

The table below contains error messages that are associated when validating data contained in a submission record against data previously accepted into CAT CAIS for the same submission record. Error codes are associated with specific fields within a submission record.

Table 22: Data Layer Validation Errors

Error Code	Error Code Description	Explanation	Warning/ Error
23004	replacedByFDID set to an unknown value	When populated, the <i>replacedByFDID</i> must reference an FDID that is accepted without error in the current submission, or an FDID that was previously accepted by CAIS.	Error
23005	fdidEndDate set prior to fdidDate of replacing record	When fdidEndReason is set as REPLACED, the fdidEndDate must not be set prior to the fdidDate of the FDID set as the replacedByFDID.	Error

B.4 Warning Error Codes

The table below contains Warning messages that are associated with Data Ingestion and included in the Feedback file. Warning codes are associated with specific fields within a submission record. Warnings are not required to be repaired.

Table 23: CAT CAIS Data File Validation Warnings

Error Code	Error Code Description	Explanation	Warning/ Error
24001	Missing or Invalid rejectionID	When populated, the <i>rejectionID</i> must be a known <i>rejectionID</i> for the <i>catReporterID</i> whose data is included in the submission file.	Warning
24002	Missing or Invalid correctionAction	When populated, <i>correctionAction</i> must use one of the allowable values. Must be populated if <i>rejectionID</i> is populated.	Warning
24003	Missing or Invalid correctingFirmDesignated ID	When populated, correctingFirmDesignatedID must reference a firmDesignatedID that is included in the current submission file or was accepted by CAT CAIS in a prior submission.	Warning
24005	Improper correction attempt	The <i>rejectionID</i> included in the correction attempt is for an improper error code. It is only acceptable to submit a correction against rejections for error codes 22001, 22905, 22906, or 22907.	Warning
24006	Unknown Attribute Name	The record contains an attribute that is not known under the reported specification version.	Warning
24007	Missing or Invalid correctingCustomerRecor dID	When populated, correctingCustomerRecordID must reference a customerRecordID that is included in the current submission file.	Warning

Table 24: CAT CAIS Identifiers File Validation Warnings

Error Code	Error Code Description	Explanation	Warning/ Error
24901	Malformed TID Record - Missing or invalid customerRecordID	customerRecordID must be present and populated for each TID record within the file.	Warning
24902	Malformed TID Record - Missing or invalid <i>tidType</i>	tidType must be present and populated for each TID record within the file.	Warning
24903	Malformed TID Record - Missing or invalid foreignTIDType	foreignTIDType must be present and populated for each record in the file where tidType is FOREIGN. foreignTIDType must not be populated for any record in the file where tidType is not set as FOREIGN.	Warning
24904	Malformed TID Record - Missing or invalid foreignTIDCountryCd	foreignTIDCountryCd must be present and populated with a valid value for each record in the file where tidType is FOREIGN and foreignTIDType is not LEI. foreignTIDType must not be populated for any record in the file where tidType is not set as FOREIGN, or	Warning

Error Code	Error Code Description	Explanation	Warning/ Error
		where tidType is set as FOREIGN and foreignTIDType is set as LEI.	
24905	Malformed TID Record - Missing or invalid <i>tidValue</i>	tidValue must be present and populated for each record in the file, and must be a 64 byte hexadecimal value.	Warning
24906	Malformed TID Record - Invalid Input Identifier used to generate <i>tidValue</i> for <i>tidType</i> of SSN/ITIN	When <i>tidType</i> is SSN/ITIN, the original Input Identifier used to generate the <i>tidValue</i> must be properly formatted and adhere to the valid range of the SSN/ITIN identifier type.	Warning
24907	Malformed TID Record - Invalid Input Identifier used to generate <i>tidValue</i> for <i>tidType</i> of EIN	When <i>tidType</i> is EIN, the original Input Identifier used to generate the <i>tidValue</i> must be properly formatted and adhere to the valid range of the EIN identifier type.	Warning
24908	Missing or invalid replacedByTIDType	When present, replacedByTIDType must be populated with a valid value. replacedByTIDType must be present and populated when replacedByTID is populated.	Warning
24909	Missing or invalid replacingForeignTIDType	replacingForeignTIDType must be present and populated for each record in the file where replacedByTIDType is FOREIGN. replacingForeignTIDType must not be populated for any record in the file where replacedByTIDType is not set as FOREIGN.	Warning
24910	Missing or invalid replacingForeignTIDCoun tryCd	replacingForeignTIDCountryCd must be present and populated with a valid value for each record in the file where replacedByTIDType is FOREIGN and replacingForeignTIDType is not LEI. replacingForeignTIDCountryCd must not be populated for any record in the file where replacedByTIDType is not set as FOREIGN, or where tidType is set as FOREIGN and replacingForeignTIDType is set as LEI.	Warning
24911	Missing or invalid replacedByTID	When present, replacedByTID must be a 64 byte hexadecimal value. Must be present when replacedByTIDType is populated.	Warning
24912	Invalid Input Identifier used to generate replacedByTID for replacedByTIDType of SSN/ITIN	When replacedByTIDType is SSN/ITIN, the original Input Identifier used to generate the replacedByTID must be properly formatted and adhere to the valid range of the SSN/ITIN identifier type.	Warning
24913	Invalid Input Identifier used to generate replacedByTID for replacedByTIDType of EIN	When replacedByTIDType is EIN, the original Input Identifier used to generate the replacedByTID must be properly formatted and adhere to the valid range of the EIN identifier type.	Warning
24914	Malformed TID Record - customerRecordID not present in paired Data file	Each customerRecordID present in the TIDs file must have a corresponding entry in the paired Data submission file.	Warning
24915	Malformed TID Record - Duplicated customerRecordID	Each customerRecordID must be present in the submission file only once. Affected records will not be processed for further validation checks.	Warning

B.4 Inconsistency Codes

Table 25: CAT CAIS Inconsistency Codes

Inconsiste ncy Code	Inconsistency Code Description	Explanation	Material/ Minor
30002	Inconsistent data for yearOfBirth	The Natural Person Customer Record has inconsistent data present for the <i>yearOfBirth</i> attribute.	Material
30003	Inconsistent data for ein	The Legal Entity Customer Record has inconsistent data present for the <i>ein</i> attribute.	Material
30004	Foreign TID reported as both Natural Person and Legal Entity	The same Foreign TID has been reported as both a Natural Person and a Legal Entity. Each CAT Customer must be only one record type.	Material

Appendix C: Glossary

Term	Definition
CAT Reporter CRD	The CAT Reporter CRD is the Central Registration Depository identifier that an Industry Member uses to report CAT account and customer data.
CAT Submitter ID	The CAT Submitter ID is the identifier of the CAT Reporting Agent, the entity authorized to submit the files to CAT on behalf of the Industry Member.
CAT Trading Day	CAT Trading Day for Industry Members is defined as beginning immediately after 4:15:00PM and no fractions of a second Eastern Time on one trade date and ending at exactly 4:15:00PM and no fractions of a second Eastern Time on the next trading date.
	Weekends or any day that all equities or options national securities exchanges are closed are not considered a CAT Trading Day.
	Trading Days that close early end 15 minutes after the Market Close.
CCID	The Customer ID, also known as CAT Customer ID or CCID, is a unique identifier generated by the Plan Processor, that is defined within SEC Rule 613(j)(5) as "with respect to a customer, a code that uniquely and consistently identifies such customer for purposes of providing data to the central repository." The CCID is a globally unique identifier generated for each unique TID value generated from a well-formatted and valid Input Identifier, in a way that is not reversible to the TID or textual Input Identifier value. The translation of TID to CCID is completed in the CCID Subsystem, in isolation from any of the Customer or Account reference data. The CCID value is never provided to CAT Reporters or Submitters and is only
	used within CAT to uniquely reference a single Customer.
FDID	FDID is defined in Section 1.1 of the CAT NMS Plan as "a unique identifier for each trading account designated by Industry Members for purposes of providing data to the Central Repository."
	See <u>CAT FAQ M2</u> for more information on the prohibition on use of actual account numbers. Refer to the <u>CAT Industry Presentation</u> on FDID for additional information.
Account Opening Date	Account Opening Date is defined in the CAT NMS Plan. For account data submission, Account Opening Date is to be reported as <i>fdidDate</i> within the submission file.
Trade Date	Trade Date for Industry Member is defined as beginning immediately after 23:59:59.999999 ET on Trade Date T - 1 and up to 23:59:59.999999 ET of the next Trade Date T.
	Weekends and holidays are not considered a Trade Date.
TID	The Transformed Identifier (TID) is a hashed version of the Input Identifier, submitted by the CAT Reporter to CAT in place of the Input Identifier, in accordance with the exemptive relief granted by the SEC on March 17, 2020. The CAT Reporter has the responsibility to translate Input Identifiers to TID values prior to submission, in accordance with the mathematical logic provided in Section 3.3 – Translation of Input Identifiers to TID Values. Input Identifiers used to generate TID values must be input in valid format – that is, 999-99-9999 for SSN or ITIN, and 99-9999999 for EIN

Appendix D: Data Dictionary

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
accountName	Text (40)	FDID Record	R	Exactly One per FDID Record	The name applied to the Account, Relationship, or EntityID at the CAT Reporter Firm.	
accountType	Array [Choice]	FDID Record	R	Exactly One per FDID Record	Representation of the type or types of Account the FDID represents. All applicable values for the FDID must be included in the array. Values: ADVISED – Indicates the account has been identified by the firm as an advised account AVERAGE – Average price account BROKERAGE – Indicates the account has been identified by the firm as a brokerage account DVP/RVP – Delivery versus Payment account/Receipt versus Payment account EDUCATION – Established for education savings including 529 Plan or Coverdale ESA ERROR – Error account FIRM – Is owned by the reporting firm, including proprietary trading accounts and inventory accounts INSTITUTION – An institutional account as	"ADVISED" "AVERAGE" "BROKERAGE" "DVP/RVP" "EDUCATION" "ERROR" "FIRM" "INSTITUTION" "MARKET" "MARGIN" "OPTION" "OTHER" "RETIREMENT" "UGMA/UTMA"

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
addressList	Multi- Dimensional Array	FDID Record	R	Exactly One per FDID Record	Structure for the array of Address records that are associated to the FDID record within the file. At a minimum, an Address1 record must be included for each FDID record within the file. Additional addresses may be included for the FDID if available within the CAT Reporter Firm's system.	
addressList	Multi- Dimensional Array	Natural Person Customer Record	С	Zero or One per Natural Person Customer Record	Structure for the array of Address records that are associated to the Customer record within the file. If the addressList is included, an ADDRESS1 record must be included for the Customer record. Additional addresses may be included for the Customer if available within the CAT Reporter Firm's system.	
addressList	Multi- Dimensional Array	Legal Entity Customer Record	С	Zero or One per Legal Entity Customer Record	Structure for the array of Address records that are associated to the Customer record within the file. If the addressList is included, an ADDRESS1 record must be included for the Customer record. Additional addresses may be included for the Customer if available within the CAT Reporter Firm's system.	
addrLine1	Text (40)	Address Record	R	Exactly One per AddressReco rd	The first Address Line for the address.	

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
addrLine2	Text (40)	AddressRe cord	0	Zero or One per AddressReco rd	Additional space for Address Line.	
addrLine3	Text (40)	AddressRe cord	0	Zero or One per AddressReco rd	Additional space for Address Line. Must not be provided if addrLine2 is not provided.	
addrLine4	Text (40)	AddressRe cord	0	Zero or One per AddressReco rd	Additional space for Address Line. Must not be provided if addrLine2 and addrLine3 are not provided.	
addrType	Choice	Address Record	R	Exactly One per Address Record	The type of the Address record. Values: ADDRESS1 – The first address record of the FDID. ADDRESS2 – The second address record of the FDID. ADDRESS3 – The third address record of the FDID. ADDRESS4 – The fourth address record of the FDID.	"ADDRESS1" "ADDRESS3" "ADDRESS4"
addrType	Choice	Address Record	R	Exactly One per Address Record	The type of the Address record. Values: ADDRESS1 – The first address record of the customer. ADDRESS2 – The second address record of the customer. ADDRESS3 – The third address record of the customer. ADDRESS4 – The fourth address record of the customer.	"ADDRESS1" "ADDRESS3" "ADDRESS4"
bankDepositoryID	Array	FDID	С	Zero or One	The identifying	

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
	[Alphanumeri c (5)]	Record		per FDID Record	number of the depository institution for the FDID. Must be populated if the accountType includes DVP/RVP and the custodian of the account is not a broker/dealer. All values included in the array must be separated by commas.	
branchOfficeCRD	Unsigned	FDID Record	R	Exactly One per FDID Record	The Central Registration Depository system generated CRD Branch Number assigned when the CAT Reporter Firm filed Form BR.	
catReporterCRD	Unsigned	Main	R	Exactly One per submission file	The CRD number assigned to the firm to which the data within the file belongs.	
catSubmitterID	Unsigned	Main	R	Exactly One per submission file	The ID of the CAT Reporting Agent that submitted the file to CAT. In the case the CAT Reporter is submitting data for themselves, they must still populate the CAT Submitter ID field.	
city	Text (100)	Address Record	R	Exactly One per Address Record	City of the Address.	
clearingBrokerID	Array [Alphanumeri c (4)]	FDID Record	С	Zero or One per FDID Record	The NSCC Clearing ID of the firm that clears the accounts. Must be populated if known to the CAT Reporter firm. All values included in the array must be separated by commas.	
correctingFirmDesign atedID	Text (40)	Correction Record	С	Zero or One per Correction Record	The firmDesignatedID that is correcting for the prior	

rejected FDID. The correctingFirmDes ignated Dib must be present in the submission file, or have been accepted in a prior CAT CAIS submission. Required if the correctionAction is CORRECTION and the prior error being corrected was against an FDID. The correctionAction is CORRECTION and the prior rejected customerRecord in the prior registed customerRecord in the submission file, or have been accepted in a prior correcting for the prior rejected customerRecord in the prior registed customerRecord in the submission file, or have been accepted in the submission file or or recting for the prior rejected customerRecord in the submission file. CORRECTION and the prior error being corrected was against a Customer. CorrectionAction Choice Correction Record The prior rejected customer. CorrectionAction Choice Correction Record The prior rejection the prior error being corrected was against a customer. CorrectionAction Choice Correction Record The prior rejection the prior rejection to correct for the prior rejected record using a new prior rejected record using a new firmDesignatedID or new Customer record. DeLETE — The prior rejection needs to be cleared without a new record being submitted.	Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
ecordID Record Recor						The correctingFirmDes ignatedID must be present in the submission file, or have been accepted in a prior CAT CAIS submission. Required if the correctionAction is CORRECTION and the prior error being corrected was against an	
Record per Correction Record per Correction Record action that is being taken to correct for the prior rejection. Values: CORRECTION – A new entry is included in the submission file to correct for the prior rejected record using a new firmDesignatedID or new Customer record. DELETE – The prior rejection needs to be cleared without a new record being		Unsigned		С	per Correction	correctingCustom erRecordID that is correcting for the prior rejected customerRecordI D record. The correctingCustom erRecordID must be present in the submission file. Required if the correctionAction is CORRECTION and the prior error being corrected was against a	
correctionList Multi- Main C Zero or One Structure for the			Record		per Correction Record	action that is being taken to correct for the prior rejection. Values: CORRECTION – A new entry is included in the submission file to correct for the prior rejected record using a new firmDesignatedID or new Customer record. DELETE – The prior rejection needs to be cleared without a new record being submitted.	

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
	Dimensional Array			per Submission File	array of Correction records within the file. Required if the submission file contains one or more Correction records. Must only be used for correcting rejections caused by malformed firmDesignatedID or largeTraderID values.	
correspondentCRD	Unsigned	Main	С	Zero or One per submission file	The CRD number of the related Introducing Broker or Correspondent firm, if applicable. All FDID and Customer data reported in the file must be for the specified firm.	
countryCode	Choice	AddressRe cord	R	Exactly One per AddressReco rd	Code of the Country of the Address, in ISO 3166-1 alpha-2 format. Please view the reference data list for acceptable values.	AA
customerEndDate	Date (Number) (8)	Legal Entity Customer Record	С	Zero or One per Legal Entity Customer Record	The date on which the customer ceased to be a customer of the CAT Reporter firm, in YYYYMMDD format.	YYYYMMDD
customerEndDate	Date (Number) (8)	Natural Person Customer Record	С	Zero or One per Natural Person Customer Record	The date on which the customer ceased to be a customer of the CAT Reporter firm, in YYYYMMDD format.	YYYYMMDD
customerEndReason	Choice	Legal Entity Customer Record	С	Zero or One per Legal Entity Customer Record	The reason why the customer ceased to be a customer of the CAT Reporter firm. Values: CORRECTION –	"CORRECTION" "ENDED" "REPLACED" "OTHER"

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					Customer was erroneously reported ENDED – Customer ended their relationship with the firm REPLACED – Input Identifier of the Customer was updated and a new Customer was reported in place of this customer OTHER – Other unlisted reason for ending the Customer relationship	
customerEndDate	Date (Number) (8)	Natural Person Customer Record	С	Zero or One per Natural Person Customer Record	The date on which the customer ceased to be a customer of the CAT Reporter firm, in YYYYMMDD format.	YYYYMMDD
customerRecordID	Unsigned	FDID Customer Record	R	Exactly One per FDID Customer Record	A unique reference to a single Customer in reference to a single FDID for a single submission file.	
customerRecordID	Unsigned	Legal Entity Customer Record	R	Exactly One per Legal Entity Customer Record	A unique reference to a single Customer for a single submission file.	
customerRecordID	Unsigned	Natural Person Customer Record	R	Exactly One per Natural Person Customer Record	A unique reference to a single Customer for a single submission file.	
customerRecordID	Unsigned	TID Record	R	Exactly One per TID Record	A unique reference to a single Customer record in the CAIS data file.	
customerStartDate	Date (Number) (8)	Legal Entity Customer Record	R	Exactly One per Legal Entity Customer Record	The date on which the customer first became a customer of the CAT Reporter firm, in YYYYMMDD	YYYYMMDD

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					format.	
customerStartDate	Date (Number) (8)	Natural Person Customer Record	R	Exactly One per Natural Person Customer Record	The date on which the customer first became a customer of the CAT Reporter firm, in YYYYMMDD format.	YYYYMMDD
customerType	Array [Choice]	Natural Person Customer Record	R	Exactly One per Natural Person Customer Record	Representation of the characteristics of the CAT Customer. All applicable values for the CAT Customer must be included in the array. Values: ACCREDITED — Customer was identified as an accredited investor by the Industry Member ADVISER — Customer is affiliated with a US registered Investment Adviser BD — Customer is a US registered Broker/Dealer CP — Customer is an officer, director, or owns 10% or more shares of a public company EMPLOYEE — Customer is an employee or associated person of the Industry Member FOREIGN — Customer is an employee or associated person of the Industry Member FOREIGN — Customer is a Natural Person or Legal Entity that does not have a US Tax Identifier NOTAPPLICABLE — None of the defined terms are applicable to the	"ACCREDITED" "ADVISER" "BD" "CP" "EMPLOYEE" "FOREIGN" "NOTAPPLICABL E" "OTHBKR" "RIC" "TRUST"
					customer. OTHBKR –	

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					Customer is affiliated with a US registered Broker other than the Industry Member RIC – Customer is a Registered Investment Company, as defined in the Investment Company Act of 1940 (15 U.S.C. § 80a–3(a)(1)) TRUST – Customer is a Trust	
customerType	Array [Choice]	Legal Entity Customer	R	Exactly One per Legal Entity Customer Record	Representation of the characteristics of the CAT Customer. All applicable values for the CAT Customer must be included in the array. Values: ACCREDITED – Customer was identified as an accredited investor by the Industry Member ADVISER – Customer is affiliated with a US registered Investment Adviser BD – Customer is a US registered Broker/Dealer CP – Customer is an officer, director, or owns 10% or more shares of a public company EMPLOYEE – Customer is an employee or associated person of the Industry Member FOREIGN – Customer is a Natural Person or Legal Entity that	"ACCREDITED" "ADVISER" "BD" "CP" "EMPLOYEE" "FOREIGN" "NOTAPPLICABL E" "OTHBKR" "RIC" "TRUST"

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					does not have a US Tax Identifier NOTAPPLICABLE – None of the defined terms are applicable to the customer. OTHBKR – Customer is affiliated with a US registered Broker other than the Industry Member RIC – Customer is a Registered Investment Company, as defined in the Investment Company Act of 1940 (15 U.S.C. § 80a–3(a)(1)) TRUST – Customer is a Trust	
ein	Text (10)	Legal Entity Customer Record	С	Zero or One per Legal Entity Customer Record	The Employer Identification Number (EIN) of the customer, in 99-999999 format. Must be included if the Input Identifier used to generate the Transformed Identifier of the customer was an EIN.	99-9999999
fdidCustomerList	Multi- Dimensional Array	FDID Record	R	Exactly One per FDID Record	Structure for the array of Customer records that are associated to the FDID record within the file.	
fdidDate	Date (Number) (8)	FDID Record	R	Exactly One per FDID Record	Date on which the FDID account opened, as defined in Section 2.2.3 of this specification, in YYYYMMDD format.	YYYYMMDD
fdidEndDate	Date (Number) (8)	FDID Record	С	Zero or One per FDID Record	Date on which the Account was closed or the Relationship was ended, in	YYYYMMDD

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					YYYYMMDD format. Must be provided if the fdidEndReason field is populated.	
fdidEndReason	Choice	FDID Record	С	Zero or One per FDID Record	Reason why the Account was closed or the Relationship was ended. Must be provided if the fdidEndDate field is populated. Values: CORRECTION – FDID was erroneously reported ENDED – FDID was ended REPLACED – FDID replaced by another FDID within the CAT Reporter Firm. OTHER – Other unlisted reason for ending the FDID TRANSFER - FDID was transferred to another CAT Reporter Firm	"CORRECTION" "ENDED" "REPLACED" "OTHER" "TRANSFER"
fdidRecordCount	Unsigned	Main	R	Exactly One per submission file	The count of firmDesignatedID attribute occurrences within the file. Used to validate the count of FDID records intended to be submitted within the file matches the count of records present in the file.	
fdidRecordID	Unsigned	FDID Record	R	Exactly One per FDID Record	A unique reference to a single FDID for a single submission file.	
fdidRecordList	Multi- Dimensional Array	Main	С	Zero or One per submission file	Structure for the array of FDID Records that are included in the file. Required if the submission file contains one or	

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					more FDID records; not required if no FDID records are included in the file.	
fdidType	Choice	FDID Record	R	Exactly One per FDID Record	Representation of the type of record of the reported FDID. Values: ACCOUNT – Account type record RELATIONSHIP – Relationship type record ENTITYID – Entity Identifier type record	"ACCOUNT" "RELATIONSHIP" "ENTITYID"
firmDesignatedID	Text (40)	FDID Record	R	Exactly One per FDID Record	The Firm Designated ID of the Account or Relationship being reported by the CAT Reporting firm.	
firstName	Text (40)	Natural Person Customer Record	R	Exactly One per Natural Person Customer Record	The First Name known for the Customer.	
foreignTIDCountryCd	Choice	TID	С	Zero or One per TID Record	Code of the Country of which issued the Input Identifier used to generate the FOREIGN type Transformed Identifier, in ISO 3166-1 alpha-2 format. Please view the reference data list for acceptable values. Required to include if the tidType is FOREIGN and the foreignTIDType is not LEI.	AA
foreignTIDType	Choice	TID Record	С	Zero or One per TID Record	The type of Foreign Input Identifier used to generate a FOREIGN type TID. Required to be populated if the	"LEI" "NATIONALID" "PASSPORT" "PERMANENT"

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					tidType is FOREIGN. Values: LEI – Legal Entity Identifier NATIONALID – National Registration or Tax Identifier PASSPORT – Country of Issuance and Passport Number PERMANENT – Permanent Resident Identifier	
hasDiscretion	Boolean	FDID Customer Record	С	Zero or One per FDID Customer Record	Indicates if the Authorized Trader has the ability to place orders on the account without prior approval of the Holder(s). Not to be provided if role is NTHOLDER or TRDHOLDER.	true false
largeTraderID	Text (13)	Large Trader Record	R	Exactly One per Large Trader Record	The LTID or ULTID associated to the FDID in the CAT Reporter's system. For LTID records, the identifier must be eight numeric characters, followed by a dash, followed by four numeric characters. For ULTID records, the identifier must start with 'ULT', followed by alphanumeric [0- 9A-Z] characters for the fifth through eighth positions, followed by a dash, followed by four alphanumeric [0- 9A-Z] characters.	For LTID – 99999999-9999 For ULTID – ULTXXXXX-XXXX
largeTraderList	Multi- Dimensional Array	FDID Record	С	Zero or One per FDID Record	Structure for the array of LTID and ULTID records that are associated to the FDID record	

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					within the file. Required if the submission file contains one or more LTID/ULTID records associated to the FDID record; not required if no LTID/ULTID records are included in the file in association to the reported FDID.	
largeTraderRecordID	Unsigned	Large Trader Record	R	Exactly One per Large Trader Record	A unique reference to a single LTID or ULTID in reference to a single FDID for a single submission file.	
lastName	Text (40)	Natural Person Customer Record	R	Exactly One per Natural Person Customer Record	The Last Name known for the Customer.	
legalEntityCustomerLi st	Multi- Dimensional Array	Main	С	Zero or One per submission file	Structure for the array of Legal Entity type Customer records that are included in the file. Required if the submission file contains one or more Legal Entity customer records; not required if no Legal Entity Customer records are included in the file.	
legalEntityCustomerR ecordCount	Unsigned	Main	R	Exactly One per submission file	The count of customerRecordI D attribute occurrences within the file for Legal Entity type Customers. Used to validate the count of Legal Entity Customer records intended to be submitted within the file matches the count of records present	

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					in the file.	
legalName	Text (100)	Legal Entity Customer Record	R	Exactly One per Legal Entity Customer Record	The Legal Name known for the Customer entity.	
lei	Alphanumeric (20)	Legal Entity Customer Record	С	Zero or One per Legal Entity Customer Record	The Legal Entity Identifier (LEI) of the customer. Must be provided if known to the firm. Must be included if the Input Identifier used to generate the Transformed Identifier of the customer was an LEI.	
ItidEffectiveDate	Date (Number) (8)	Large Trader Record	R	Exactly One per Large Trader Record	Date on which the LTID or ULTID became associated to the FDID within the CAT Reporter's system, in YYYYMMDD format.	YYYYMMDD
ItidEndDate	Date (Number) (8)	Large Trader Record	С	Zero or One per Large Trader Record	Date on which the LTID or ULTID was no longer associated to the FDID within the CAT Reporter's system, in YYYYMMDD format. Must be provided if the ItidEndReason field is populated.	YYYYMMDD
ItidEndReason	Choice	Large Trader Record	С	Zero or One per Large Trader Record	Reason why the LTID or ULTID was no longer associated to the FDID. Must be populated in order to end date an LTID-to-FDID association in the system. Must be provided if the ItidEndDate field is populated. Values: CORRECTION – LTID was erroneously reported	"CORRECTION" "ENDED" "REPLACED" "OTHER" "TRANSFER"

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					ENDED – LTID- to-FDID association was ended REPLACED – LTID was replaced by a different LTID or the FDID was replaced by a different FDID. OTHER – Other unlisted reason for ending the LTID- to-FDID association TRANSFER – LTID association was ended because the FDID was transferred to another firm	
middleName	Text (20)	Natural Person Customer Record	0	Zero or One per Natural Person Customer Record	The Middle Name known for the Customer.	
nameSuffix	Choice	Natural Person Customer Record	0	Zero or One per Natural Person Customer Record	The Name Suffix known for the Customer. Values: FIFTH FOURTH JUNIOR SENIOR THIRD	"FIFTH" "FOURTH" "JUNIOR" "SENIOR" "THIRD"
naturalPersonCustom erList	Multi- Dimensional Array	Main	С	Zero or One per submission file	Structure for the array of Natural Person type Customer records that are included in the file. Required if the submission file contains one or more Natural Person customer records; not required if no Natural Person customer records are included in the file.	
naturalPersonCustom erRecordCount	Unsigned	Main	R	Exactly One per submission	The count of customerRecordl D attribute occurrences	

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
				file	within the file for Natural Person type Customers. Used to validate the count of Natural Person Customer records intended to be submitted within the file matches the count of records present in the file.	
postalCode	Text (15)	Address Record	С	Zero or One per Address Record	Postal Code of the Address. Must be provided if Postal Codes exist for the Country of the Address. Please view the reference data list for acceptable formatting per Country.	
primeBrokerID	Array [Alphanumeri c (4)]	FDID Record	С	Zero or One per FDID Record	Clearing number of the account's prime broker. Must be provided if the accountType includes DVP/RVP and the custodian of the account is a broker/dealer. All values included in the array must be separated by commas.	
priorCATReporterCR D	Unsigned	FDID Record	С	Zero or One per FDID Record	Indicates the CRD of the CAT Reporter firm from which the FDID was acquired. Must be provided if FDID was acquired by the CAT Reporter. Must be provided if priorCATReporter FDID is populated.	
priorCATReporterFDI D	Text (40)	FDID Record	С	Zero or One per FDID Record	Indicates the original FDID for the record acquired by the current CAT Reporter firm. Must be provided if FDID was	

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					acquired by the CAT Reporter.	
regionCode	Text(40)	AddressRe cord	С	Zero or One per AddressReco rd	Code of the local region of the Address, in ISO 3166-2 format with the two character Country Code. Please view the reference data list for acceptable values. Must be provided if known to the CAT Reporter. Must be provided if a region list is available for the Country of the Address. Optional to provide if no region list is available for the Country of the Address.	AA-XX
registeredRepCRD	Array [Unsigned]	FDID Record	С	Zero or One per FDID Record	The Central Registration Depository ID assigned to the Registered Representative of the FDID. Must be provided if known to the CAT Reporter firm. All CRDs included in the array must be only numeric values, must not contain any leading zeroes, and must be separated by commas.	
rejectionID	Unsigned	Correction Record	R	Exactly One per Correction Record	The rejectionID from a prior submission that was created for the particular Data Ingestion error being corrected.	
replacedByFDID	Text (40)	FDID Record	С	Zero or One per FDID Record	The new FDID replacing the currently reported FDID, used to provide historical linkage across replaced records over time. Must be	

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					provided if the fdidEndReason is REPLACED. Must not be provided if the fdidEndReason is any value other than REPLACED.	
replacedByTID	Hexadecimal (64)	TID Record	C	Zero or One per TID Record	The obfuscated TID value created in place of the SSN, ITIN, EIN, or Foreign identifier of the Customer Record that has taken the place of the reported Customer Record. Must be provided if the customerEndReas on in the CAIS Data file for the Customer is REPLACED. Must not be provided if the customerEndReas on is not set or is set as any value other than REPLACED.	
replacedByTIDType	Choice	TID Record	С	Zero or One per TID Record	The type of obfuscated TID value created in place of the Input Identifier of the Customer Record that has taken the place of the reported Customer Record. Must be provided if the customerEndReas on in the CAIS Data file for the Customer is REPLACED. Must not be provided if the customerEndReas on is not set or is set as any value other than REPLACED. Values: EIN – Indicates the replacedByTID	"FOREIGN" "SSN/ITIN"

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					was generated using an Employer Identification Number (EIN). FOREIGN – Indicates an identifier other than an EIN, SSN, or ITIN was used to generate the replacedByTID. SSN/ITIN – Indicates the replacedByTID was generated using a Social Security Number (SSN) or Individual Taxpayer Identification Number (ITIN)	
replacingForeignTIDC ountryCd	Choice	TID	С	Zero or One per TID Record	Code of the Country of which issued the Input Identifier used to generate the FOREIGN type Transformed Identifier that has taken the place of the reported Customer Record., in ISO 3166-1 alpha-2 format. Please view the reference data list for acceptable values. Required to include if the replacedByTIDTy pe is FOREIGN and the replacingForeignT IDType is not LEI.	AA
replacingForeignTIDT ype	Choice	TID Record	С	Zero or One per TID Record	The type of Foreign Input Identifier used to generate a FOREIGN type TID that has taken the place of the reported Customer Record. Required to be populated if the replacedByTIDTy pe is FOREIGN.	"LEI" "NATIONALID" "PASSPORT" "PERMANENT"

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					Values: LEI – Legal Entity Identifier NATIONALID – National Registration or Tax Identifier PASSPORT – Country of Issuance and Passport Number PERMANENT – Permanent Resident Identifier	
role	Choice	FDID Customer Record	R	Exactly One per FDID Customer Record	Representation of the type of role the Customer has on the FDID. Values: AUTH3RD – An Authorized Trader who is not a holder of the account, nor an employee of the reporting Industry Member, who has authority to place orders for the account AUTHREP – An Authorized Trader who is an employee of the reporting Industry Member and has authority to place orders for the account NTHOLDER – Holder of the Account that does not have authorization to trade on the Account that also has authorization to trade on the Account that also has authorization to trade on the Account that also has authorization to trade on the Account that also has authorization to trade on the Account	"AUTHREP" "NTHOLDER" "TRDHOLDER"
roleEndDate	Date (Number) (8)	FDID Customer Record	С	Zero or One per FDID Customer Record	Date on which the customer ceased having the specified role on the FDID, in YYYYMMDD	YYYYMMDD

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					format. Must be provided if the roleEndReason field is populated.	
roleEndReason	Choice	FDID Customer Record	C	Zero or One per FDID Customer Record	Reason why the customer ceased having the specified role on the FDID. Must be provided if the roleEndDate field is populated. Values: CORRECTION – Customer role on FDID was erroneously reported or FDID was erroneously reported ENDED – Customer role on FDID was ended or FDID was ended or FDID was ended or FDID was ended because the FDID was replaced with another FDID, or because the Customer Input Identifier was replaced with another Input Identifier OTHER – Other unlisted reason for ending the customer role on FDID TRANSFER – Role ended because the FDID was transferred to another firm	"CORRECTION" "ENDED" "REPLACED" "OTHER" "TRANSFER"
roleStartDate	Date (Number) (8)	FDID Customer Record	R	Exactly One per FDID Customer Record	Date on which the Customer entered into the specified role on the account, in YYYYMMDD format.	YYYYMMDD
tidType	Choice	TID Record	R	Exactly One per TID record	The specific type of Input Identifier used to generate the TID value.	"EIN" "FOREIGN" "SSN/ITIN"

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					Values: EIN – Indicates the TID was generated using an Employer Identification Number (EIN). FOREIGN – Indicates an identifier other than an EIN, LEI, SSN, or ITIN was used to generate the TID. SSN/ITIN – Indicates the TID was generated using a Social Security Number (SSN) or Individual Taxpayer Identification Number (ITIN)	
tidRecordCount	Unsigned	Main	R	Exactly One per submission file	The count of TID attribute occurrences within the file. Used to validate the count of TID records intended to be submitted within the file matches the count of records present in the file.	
tidRecordList	Multi- Dimensional Array	Main	С	Zero or One per submission file	Structure for the array of TID Records that are included in the file. Required if the submission file contains one or more TID records; not required if no TID records are included in the file.	
tidValue	Hexadecimal (64)	TID Record	R	Exactly One per TID Record	The obfuscated TID value created in place of the Input Identifier of the Customer Record whose data is being reported.	
updateNotification	Boolean	Legal Entity Customer	С	Zero or One per Legal Entity	Indicates the customer record is being reported to	true false

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
		Record		Customer Record	close a Material Inconsistency, or is being reported with known updates to key attributes. If populated as true, changes to the key attributes will not result in a Material Inconsistency. Updates to the EIN included on a Legal Entity customer record will always result in a Material Inconsistency because if an EIN is available for the customer, the EIN is to be used to create the TID for the submission and a differing EIN must result in a different TID.	
updateNotification	Boolean	Natural Person Customer Record	С	Zero or One per Natural Person Customer Record	Indicates the customer record is being reported to close a Material Inconsistency, or is being reported with known updates to key attributes including: Year of Birth. If populated as true, changes to the key attributes will not result in a Material Inconsistency.	true false
version	Text (10)	Main	R	Exactly One per submission file	The version of the CAIS Schema under which the data is reported. The version utilized for full Customer reporting will be 2.0.0.	2.0.0
version	Text (10)	Main	R	Exactly One per submission file	The version of the Transformed Identifiers Schema under which the data is reported. Initial version utilized	2.0.0

Field Name	Data Type	JSON Object	Include Key	Occurrences	Description	Format/ Accepted Values
					will be 2.0.0	
yearOfBirth	Year (Number) (4)	Natural Person Customer Record	R	Exactly One per Natural Person Customer Record	The Year of Birth known for the Customer in YYYY format.	YYYY

Appendix E: Country and Region Codes

Appendix E is located on www.catnmsplan.com/specifications/im. The appendix contains two lists, one list uses the Country Code, Country Name, and Postal Code formatting, while the other list uses the Region Code and Region Name. If no Postal Code format is noted, Postal Code is optional for inclusion for the Country and no formatting validation will occur.